



- Specially designed for Cree XR-E series of LEDs.
- New extremely wide street light design with very wide horizontal and vertical angle.
- Predecessor of the Strada-B, wider distribution than ever before.
- Special care taken to make a uniform white or warm white illumination.
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Allows use of high current and temperature conditions.
- Best available optical efficiency, approximately 95%.
- Fastening to heat sink with or without PU foam adhesive tape of automotive grade, please select which suits the best for your needs.
- We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.
- Please check fastening details from this link:
(http://www.ledil.com/datasheets/DataSheet_TAPE.pdf)


LENS TYPES

NAME	ORDERING CODE	FWHM Angle
Strada-DN-XR	C11185_Strada-DN-XR	±52° x ±33°
Strada-DN-XR-TAPE	CA11186_Strada-DN-XR-tape	±52° x ±33°


EULUMDAT & IES FILES AVAILABLE BY REQUEST

MEASUREMENT DATA

Relative Intensity of C11185_Strada-DN-XR

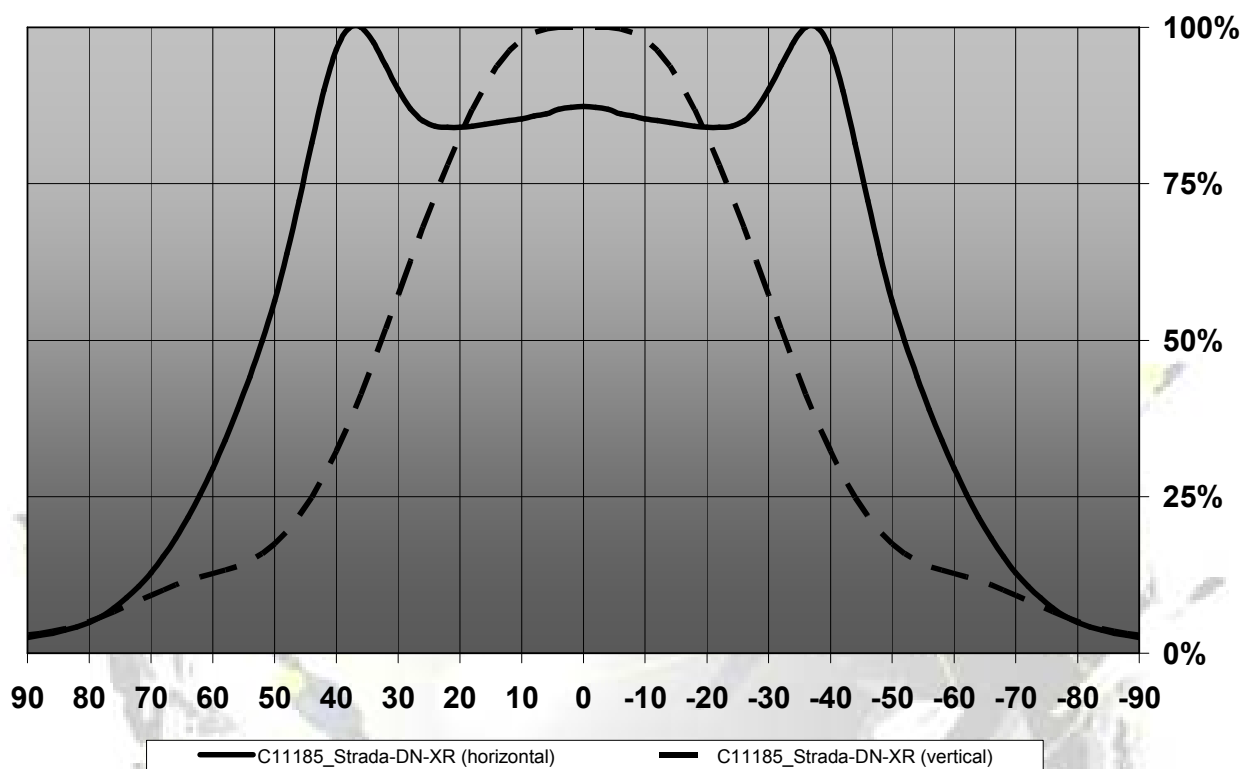

DRAWINGS

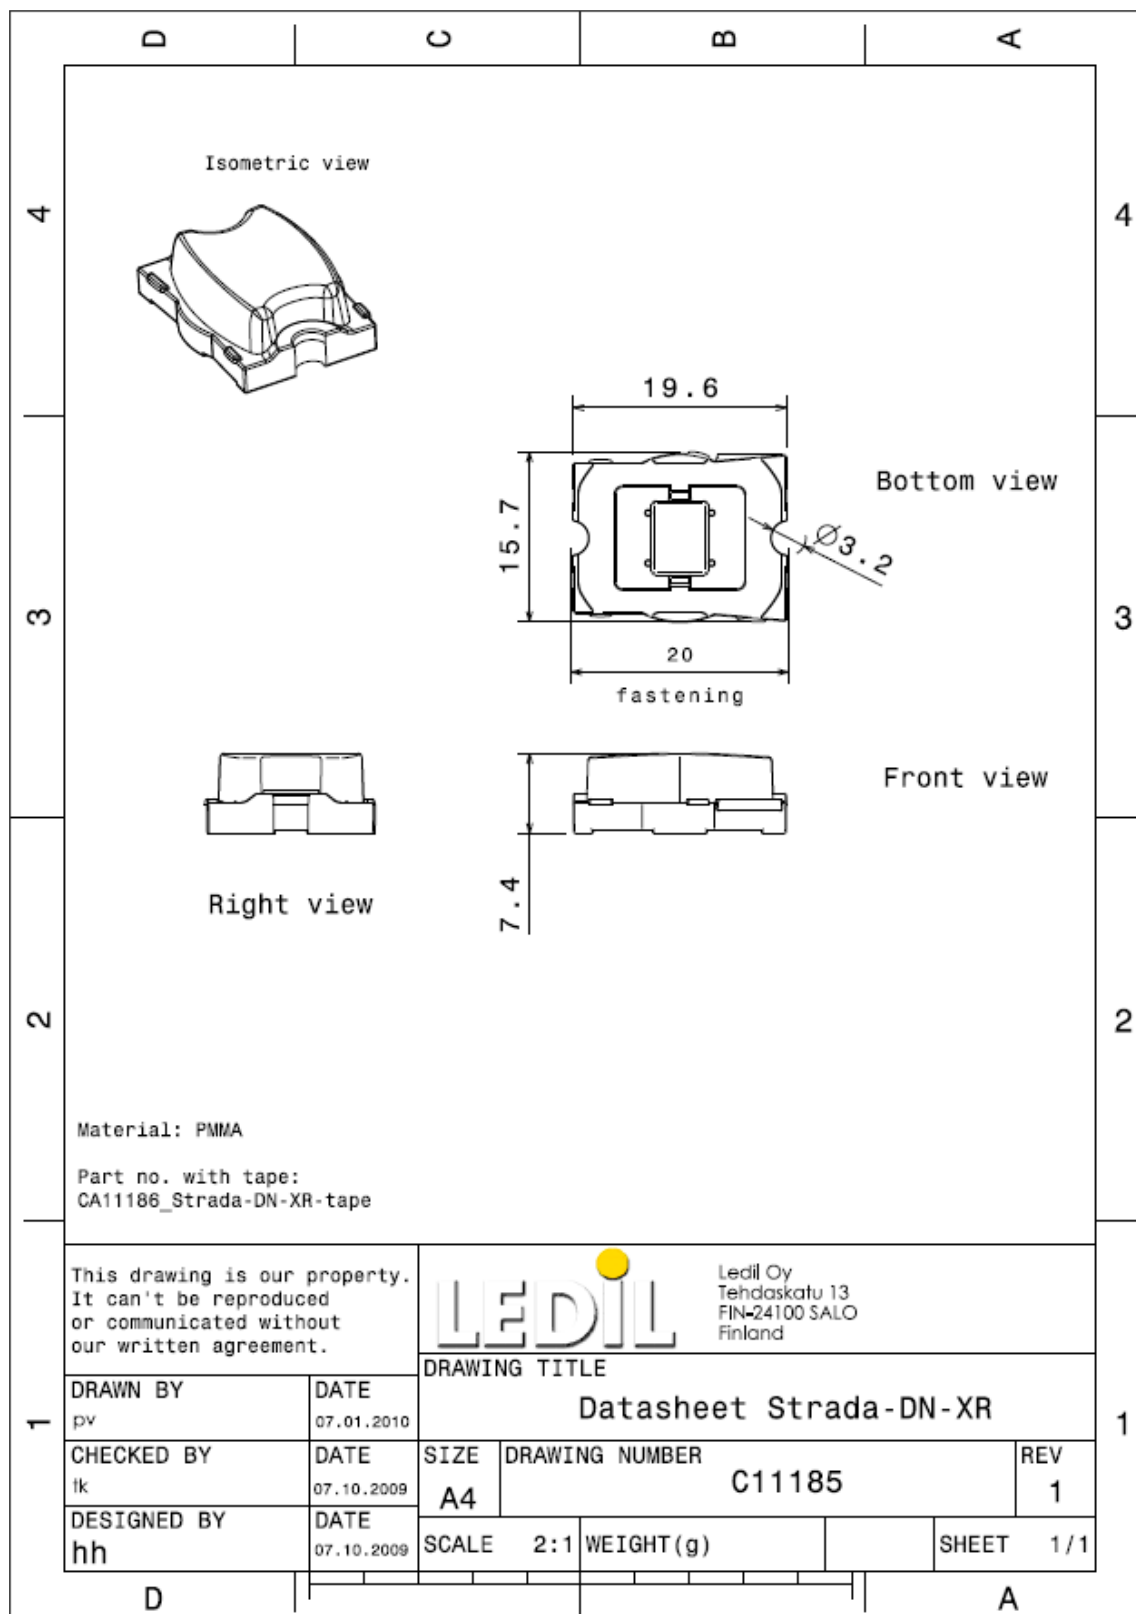

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com