


Ultra Precision $\pm 0.01\%$ Tol, $\pm 2\text{ppm}$ TCR Thin Film Chip Resistors

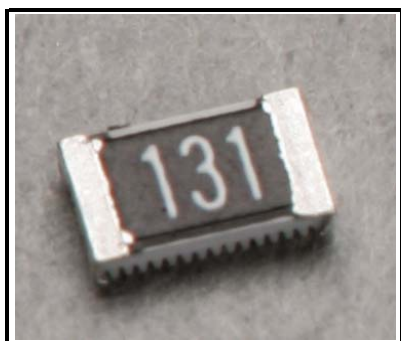

FEATURES

- Unmatched Reliability and Excellent Stability at different environmental conditions
- Low noise, THIN FILM(NiCr) construction
- EIA Standard case size(0805, 1206)
- RoHS Compliance and 100% Lead-Free (Matte Sn termination finished)

APPLICATIONS

- Automotive
- Scale, Test & Measurement
- Optical & Telecommunication
- Medical and Industrial Equipment

Electrical Specification



Type	Size (in inch)	Power Rating at 70 °C	Resistance Tolerance (Code)	Resistance Range (ohm)	Temperature Coefficient (Code) *1)	Max. operating Voltage	Resistance Values (E-series)	Packaging (Code)
					(ppm/°C)			
URG1608	0603	1/16W	$\pm 0.01\%$ (L) $\pm 0.02\%$ (P)	100 – 7.5K	± 2 (L)	100V	E-24, E-96	Tape & Reel (T&R) T1 = 1000pcs Cut & Tape (C&T) None=100, 200, 300 pcs with C&T in Bag
URG2012	0805	1/10W		100 – 36K	± 2 (L)	150V		
URG3216	1206	1/4W		100 – 68K	± 2 (L)	200V		

*1) Assurance temperature range: $-20^{\circ}\text{C} \sim 125^{\circ}\text{C}$



Reliability Test Data

Item	Test Method (MIL-PRF-55342/JIS C5201-1)	ΔR Limits
Short Time Overload	2.5 times of Rated Load X 5sec.	$\pm 0.02\%$
Load Life	70°C Rated Load 90min. On/ 30min. Off per Cycle X 2000	$\pm 0.02\%$
Temp. Hum. Bias	85°C 85% RH 1/10 power loaded 90min. On/ 30min. Off per Cycle X 2000	$\pm 0.05\%$
Thermal Shock	-65°C (30min)/room temp.(2min) / $+150^{\circ}\text{C}$ (30min)/room temp.(2min), 100 cycles, no bias	$\pm 0.02\%$
High Temperature	155°C for 100h, no bias	$\pm 0.02\%$



Load Life Test Data for 3,000Hrs @ 70°C at Rated Power

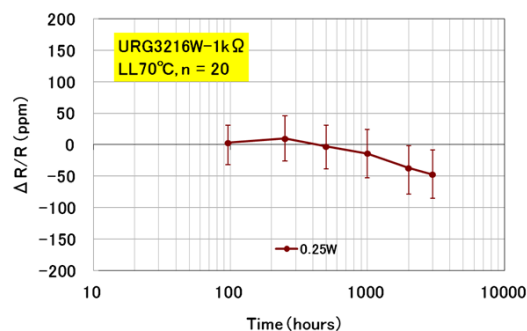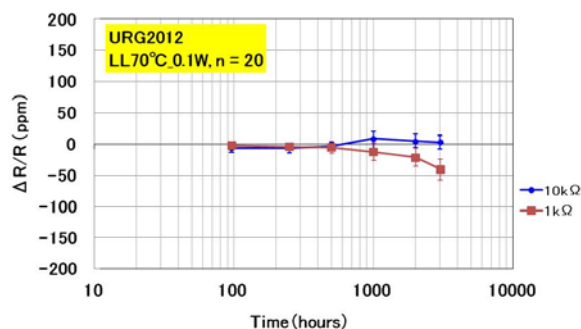



Temperature Humidity Bias

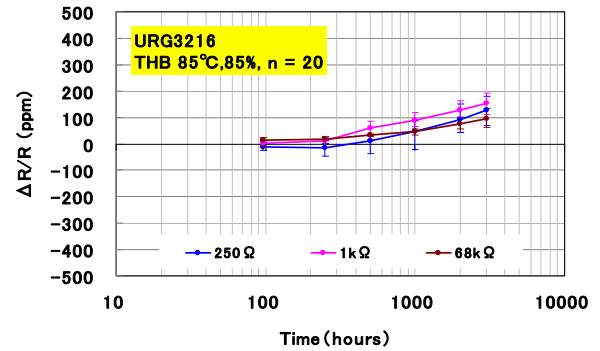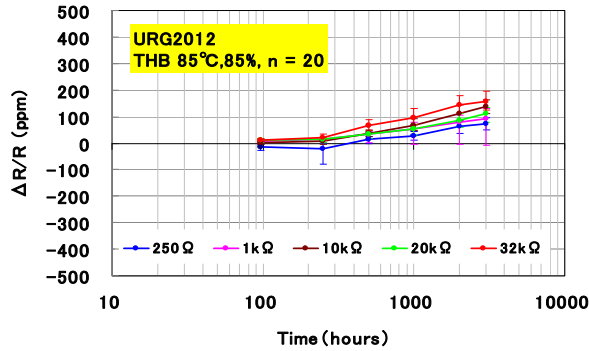



Thermal Shock

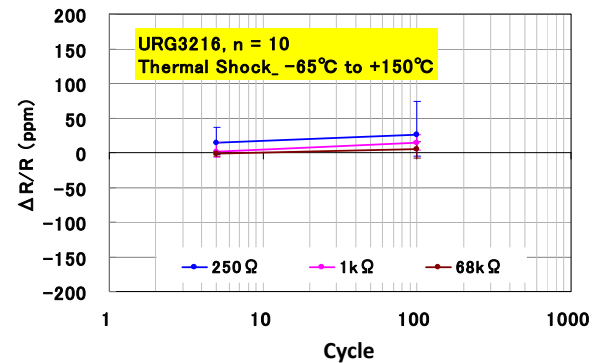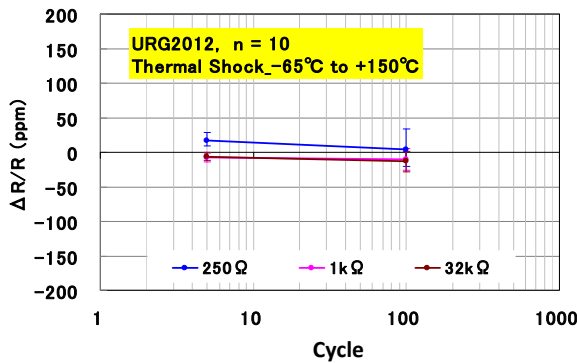



High Temperature Exposure at 155°C with no power

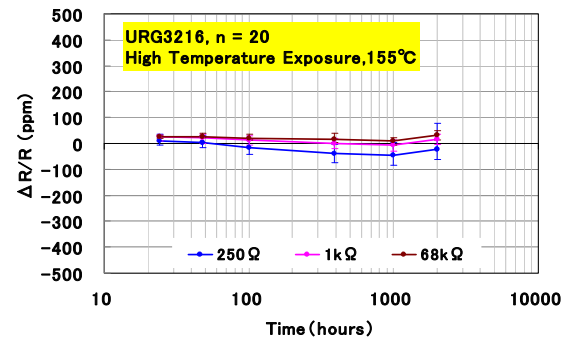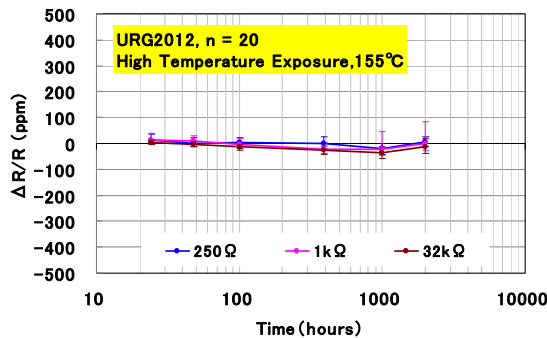


Typical TCR Curve and Thermal Characteristic of Resistance value

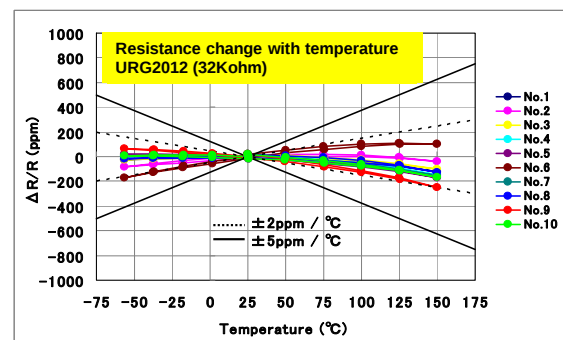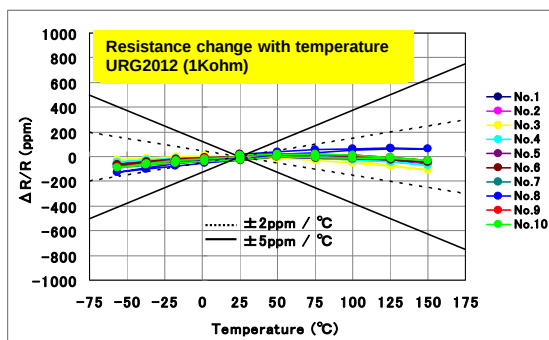

Typical TCR Curve and Thermal Characteristic of Resistance value

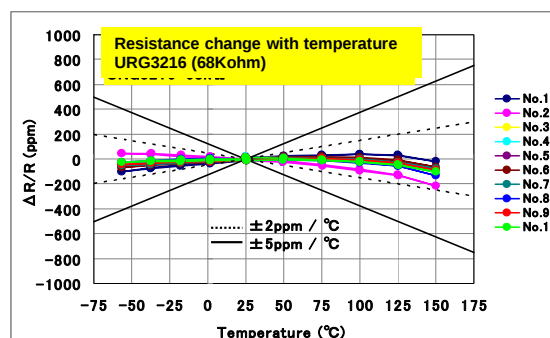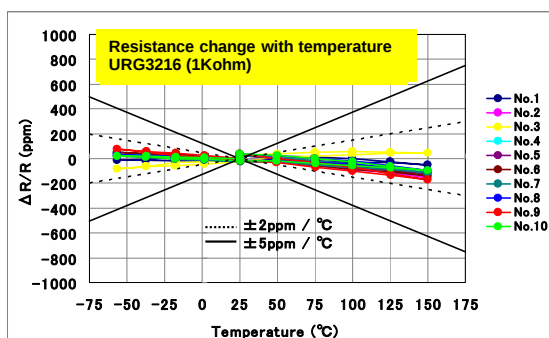


Dimensions & Footprints

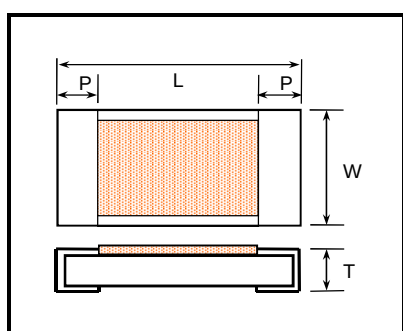

TYPE	Dimension inch(mm)			
	L	W	P	T
URG1608	.063 ± .004 (1.6 ± 0.1)	.031 ± .006 (0.8 ± 0.15)	.012 ± .006 (0.3 ± 0.15)	0.016 ± .004 (0.4 ± 0.1)
URG2012	.079 ± .008 (2.0 ± 0.2)	.049 ± .008 (1.25 ± 0.2)	.016 ± .008 (0.4 ± 0.2)	0.016 ± .004 (0.4 ± 0.1)
URG3216	.126 ± .008 (3.2 ± 0.2)	.063 ± .008 (1.6 ± 0.2)	.02 ± .01 (0.5 ± 0.25)	0.016 ± .004 (0.4 ± 0.1)


Recommended Mounting Footprints

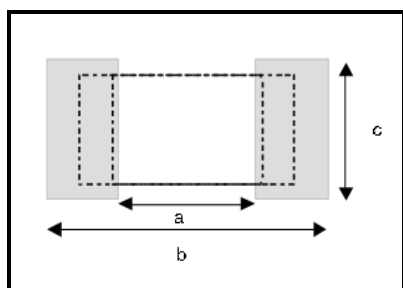


TYPE	Dimension inch(mm)		
	a	b	c
URG1608	.040 (1.0)	.118 (3.0)	.047 (1.2)
URG2012	.047 (1.2)	.157 (4.0)	.067 (1.7)
URG3216	.079 (2.0)	.197 (5.0)	.079 (2.0)

Power Derating Curve

For operation above 75degC, power rating must be derated according to the following chart.

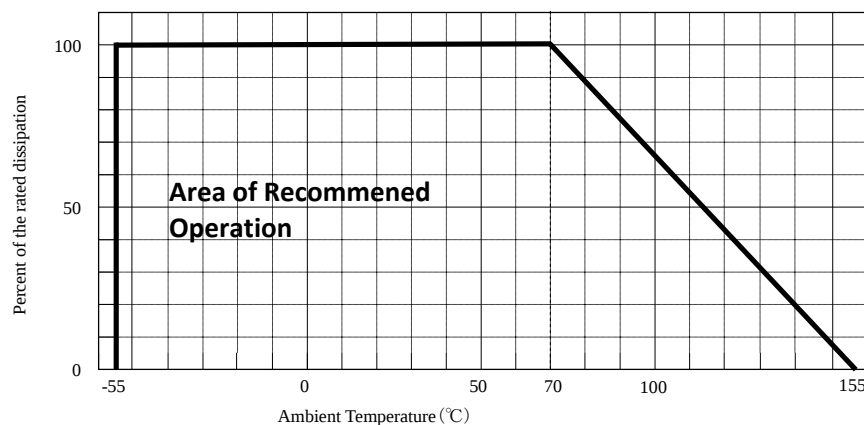


Recommended Reflow Curve

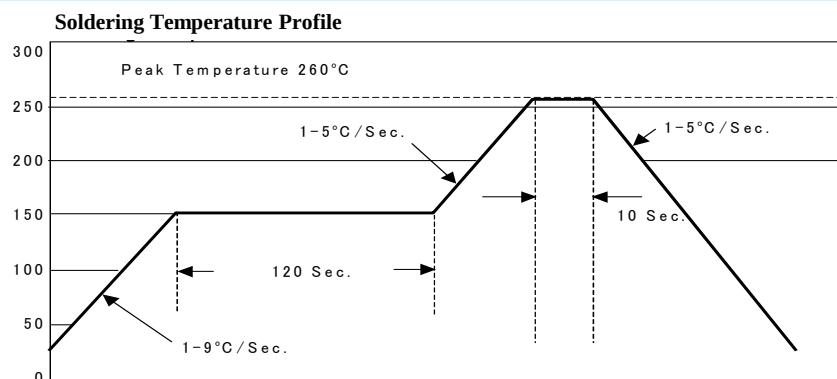

Tape & Reel Dimensions (mm)

Type	A	B	E	F	W	P ₀	P ₁	P ₂	t ₁
URG1608	1.1 ± 0.1	1.9 ± 0.1	1.75 ± 0.1	3.5 ± 0.05	8.0 ± 0.3	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	0.6 ± 0.05
URG2012	1.65 ± 0.2	2.4 ± 0.2							0.75 ± 0.05
URG3216	1.9 ± 0.1	3.5 ± 0.1							1.0 ± 0.2

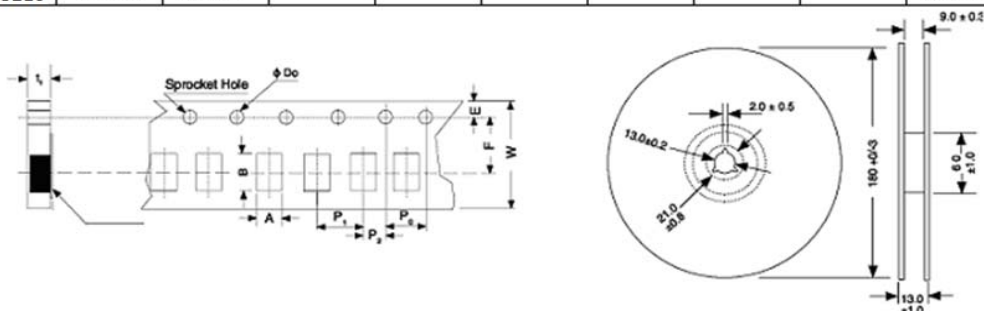

Ordering information

URG	2012	L	-	104	-	L	-	T1
TYPE	Size	TCR		R-Values		Tolerance		Package
	1608 2012 3216	L = 2ppm/°C		3 digits for E24 series (Ex.101=100 ohm) 4 digits for E96 series (Ex.4992=49.9K ohm) URG3216 only 4digits for all values E24 & E96 (Ex. 1000=100 ohm)		L = ±0.01% P = ±0.02%		T&R or C&T in Bag T1 = 1000pcs T&R None=100 (MOQ) 200 300 pcs with C&T in Bag

Notice

For non-standard R-values requests, please contact our technical support.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com