


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

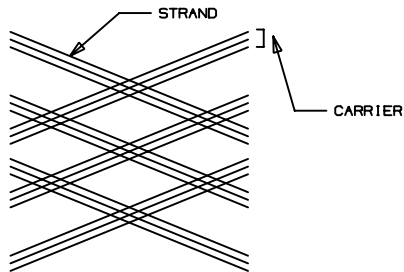

PANDUIT PART NO.	NOMINAL I.D.	BUNDLE DIA.	NO. OF CARRIERS	NO. OF STRANDS PER CARRIER	WEIGHT /1000' lbs. (kg)
SE12____-R__	0.125 (3.18)	0.0937 - 0.25 (2.37 - 6.35)	32	1	1.81 (82)
SE25____-R__	0.250 (6.35)	0.125 - 0.375 (3.17 - 9.53)	24/48 *	3/1 *	3.92 (1.78)
SE38____-R__	0.375 (9.53)	0.1875 - 0.625 (4.76 - 15.88)	36	3	5.71 (2.59)
SE50____-R__	0.500 (12.70)	0.25 - 0.75 (6.35 - 19.05)	48		7.41 (3.37)
SE75____-R__	0.750 (19.05)	0.5 - 1.25 (12.70 - 31.75)	64 or 72		10.42 (4.74)
SE125____-R__	1.250 (31.75)	0.75 - 1.5 (19.05 - 38.10)	96		15.87 (7.21)
SE150____-R__	1.500 (38.10)	1.0 - 2.25 (25.40 - 57.15)		120	4
SE175____-R__	1.750 (44.45)	1.25 - 2.75 (31.75 - 69.85)	23.3 (10.59)		
SE200____-R__	2.000 (50.8)	1.25 - 2.75 (31.75 - 69.85)	5		26.3 (11.95)

NOTES:

- ALL STRANDS OF THE PET SLEEVING SHALL BE THE SAME COLOR.
- THE FLAME RETARDANT PET MATERIAL SHALL HAVE ALL STRANDS THE SAME COLOR EXCEPT FOR TWO CRISSCROSS WHITE TRACERS(EACH TRACER CONSISTING OF ONE COMPLETE CARRIER)-OR-ONE SINGLE STRAND TRACER(ONE STRAND WITHIN CARRIER IS THE OPPOSITE COLOR).ALL STRANDS OF WHICH ARE WHITE, EXCEPT FOR WHITE SLEEVING, THE TRACERS ARE THEN BLACK.
- PART NUMBERS SE25P-R- AND SE25PFR-R- HAVE 24 CARRIERS AND 3 STRANDS/CARRIERS.

SE	12	PFR	-	M	R	10	
							COLOR 0 = WEATHER RESISTANT BLACK
							8 = GRAY
							10 = WHITE
							C = CLEAR
							REEL
							PACKAGE SIZE L = 50 FT (15.24 M)
							C = 100 FT (30.48 M)
							T = 200 FT (60.96 M)
							D = 500 FT (152.4 M)
							M = 1000 FT (304.8 M)
							MATERIAL P = PET
							PFR = FLAME RETARDANT PET
							NOM. I.D. SIZE 12 = 0.125 (3.2)
							25 = 0.250 (6.4)
							38 = 0.375 (9.5)
							50 = 0.500 (12.7)
							75 = 0.750 (19.1)
							125 = 1.250 (31.8)
							150 = 1.500 (38.1)
							175 = 1.750 (44.5)
							200 = 2.000 (50.8)
							SLEEVING EXPANDABLE

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G00239KD_PB_BRDSLVL_01

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

STANDARD BRAIDED
EXPANDABLE SLEEVING (SE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:

(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,

ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

I	6-10-05	TMSA		REMOVED MATERIAL DESIGNATIONS PLD AND PFRD						DRAWN BY TMSA	SEE TABLE	SCALE NONE	
R	3/17/05	TMSA		INITIAL RELEASE	GB0239KD	R				DATE 3/17/05		DRAWING NO. GB0239KD	DWG A SIZE
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	CHK'D			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com