


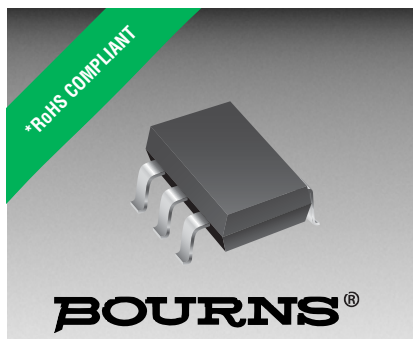

Features

- RoHS compliant*
- Protects four lines
- ESD protection
- Low capacitance - 3.5 pF

Applications

- Ethernet - 10/100/100 Base T
- Cellular phones
- Video/graphics cards
- USB 2.0 interface
- DVI interface


CDSOT23-SRV05-4 — Steering Diode TVS Array Combo

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Transient Voltage Suppressor Array diodes for surge and ESD protection applications, in compact chip package SOT23-6 size. Bourns® Chip Diodes conform to JEDEC standards, are easy to handle on standard pick and place equipment and their flat configuration minimizes roll away.

The Bourns® device will meet IEC 61000-4-2 (ESD), IEC 61000-4-4 (EFT) and IEC 61000-4-5 (Surge) requirements.

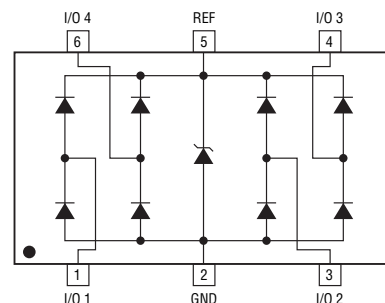

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	Min.	Nom.	Max.	Unit
Peak Pulse Current ($t_p = 8/20 \mu s$)	I_{PP}			30	A
Peak Pulse Power ($t_p = 8/20 \mu s$) ¹	P_{PP}			500	W
Working Peak Reverse Voltage	V_{WM}			5	V
Breakdown Voltage @ 1 mA	V_{BR}	6			V
Leakage Current @ V_{WM}	I_D			5	μA
Capacitance	$C_{j(SD)}$		3.5	5	pF
Forward Surge Rating (1/20 s @ 25 °C, $I_F = 10$ mA)	V_F			1.5	V
Clamping Voltage (per IEC 61000-4-5) 8/20 μs)	@ $I_{PP} = 1$ A	V_C		12	V
	@ $I_{PP} = 5$ A			15	
ESD Protection (per IEC 61000-4-2) Contact Discharge Air Discharge	ESD	8 15			kV
EFT Protection (per IEC 61000-4-4) @ 5/50 ns	EFT	40			A

Notes:

1. See Peak Pulse Power vs. Pulse Time.

Thermal Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	Min.	Nom.	Max.	Unit
Operating Temperature	T_J	-55	+25	+150	°C
Storage Temperature	T_{STG}	-55	+25	+150	°C

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.


CDSOT23-SRV05-4 — Steering Diode TVS Array Combo

BOURNS®


Mechanical Characteristics

This is a molded JEDEC SOT23-6 package with 100 % Matte Sn on the lead frame. It weighs approximately 15 mg and has a flammability rating of UL 94V-0.

Product Dimensions

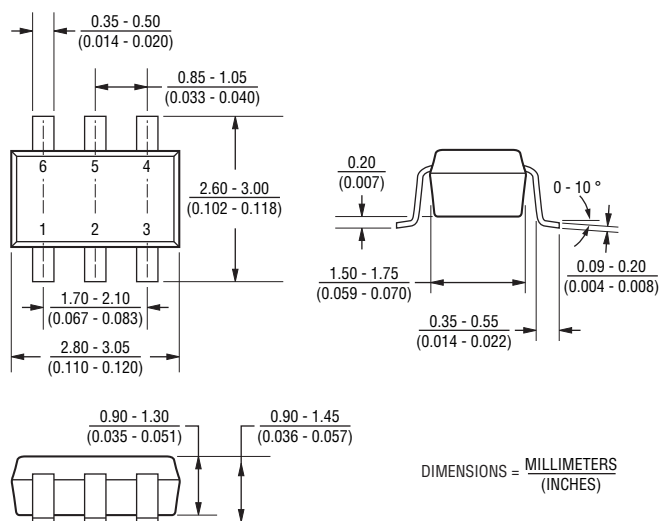

Recommended Footprint

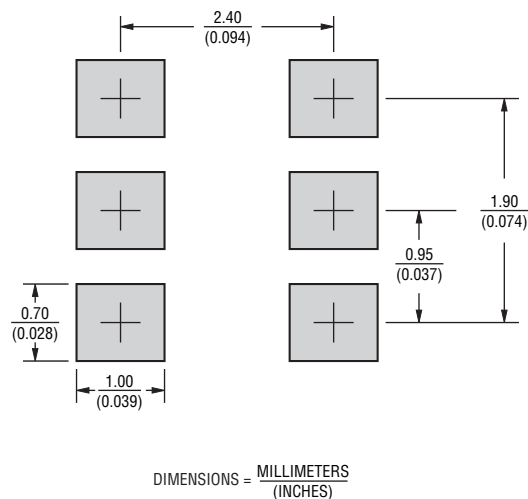

How to Order

CD SOT23 - SRV 05 - 4

Common Code _____
 CD = Chip Diode

Package _____
 SOT23 = SOT23-6 Package

Model _____
 SRV = Steering Diode Array

Working Peak Reverse Voltage _____
 05 = 5 V_{RWM} (Volts)

Number of Protection Lines _____

Typical Part Marking


CDSOT23-SRV05-4 S5

CDSOT23-SRV05-4 — Steering Diode TVS Array Combo


BOURNS®

Performance Graphs


Peak Pulse Power vs. Pulse Time

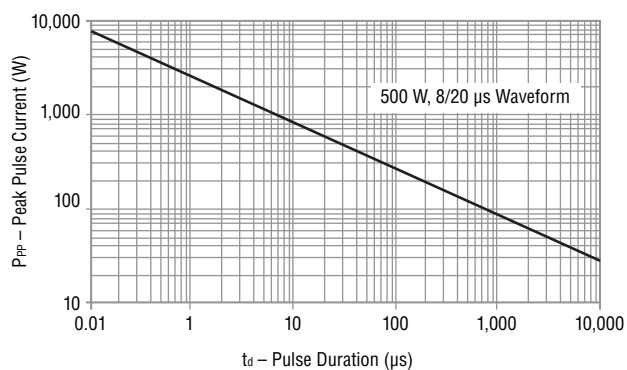


Pulse Waveform

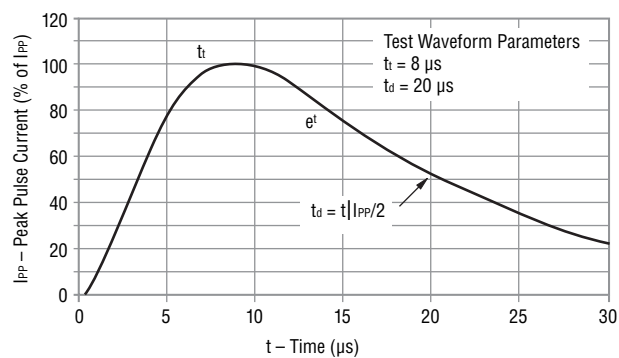

Block Diagram

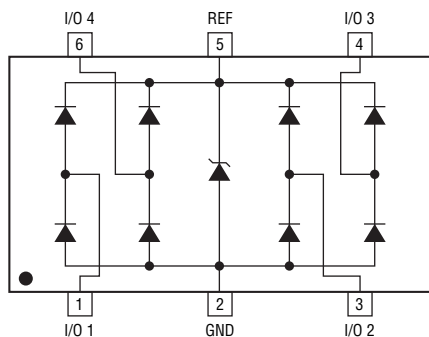


Power Derating Curve

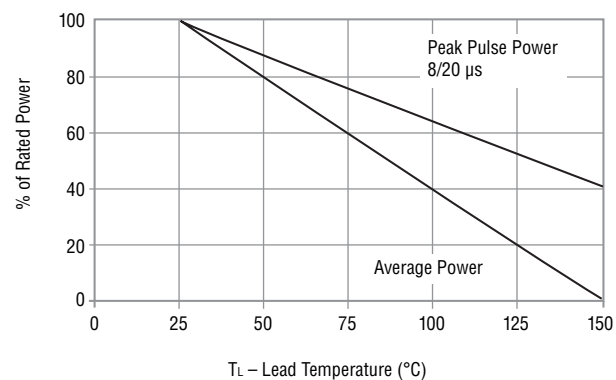

BOURNS®

The product is packaged in tape and reel format per EIA-481 standard.

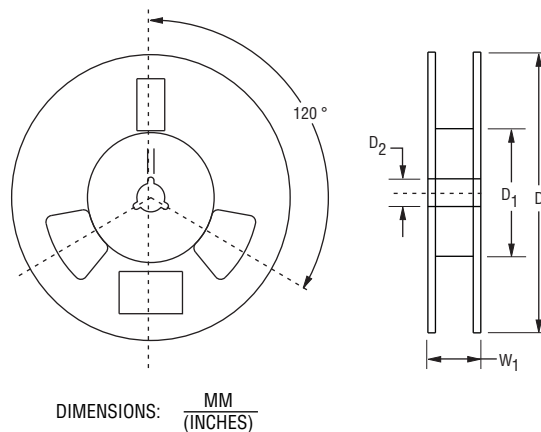**BOURNS®**

Asia-Pacific:

Tel: +886-2 2562-4117

Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555

Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500

Fax: +1-951 781-5700

www.bourns.com

REV. 12/12

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com