


# SMD Power Inductor CDEP134



## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 13.9 × 13.9 × 4.9 mm Max.
- Product weight: 2.6g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 11.8" diameter reel
- 500pcs per reel



## Applications

- Ideally used in Notebook PC CPU power supply.

## Dimension - [mm]

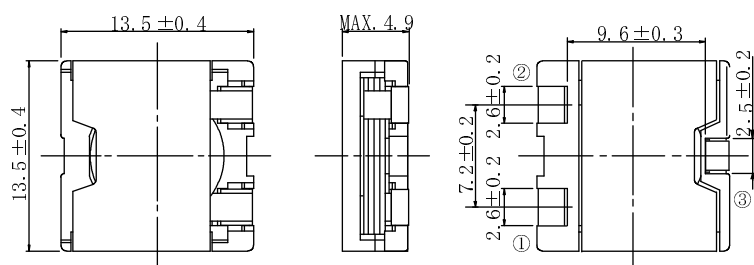

## Land pattern and Schematics - [mm]



# SMD Power Inductor CDEP134



## Electrical Characteristics

Electrical Characteristics - 1

| PART NO.        | STAMP | INDUCTANCE<br>[WITHIN] ※1 | D.C.R. (mΩ)<br>[MAX.] (Typ.)<br>(at 20°C) | SATURATION<br>CURRENT (A) ※2 |            | TEMPERATURE<br>RISE CURRENT<br>(A) ※3 ΔT=40°C |
|-----------------|-------|---------------------------|-------------------------------------------|------------------------------|------------|-----------------------------------------------|
|                 |       |                           |                                           | (at 20°C)                    | (at 100°C) |                                               |
| CDEP134NP-0R4NC | 0R4N  | 0.4 μH ±30%               | 1.9(1.6)                                  | 32.0                         | 27.0       | 18.5                                          |
| CDEP134NP-0R9MC | 0R9M  | 0.9 μH ±20%               | 2.5(2.1)                                  | 21.6                         | 18.4       | 17.0                                          |
| CDEP134NP-1R6MC | 1R6M  | 1.6 μH ±20%               | 3.7(3.1)                                  | 16.0                         | 13.8       | 15.0                                          |
| CDEP134NP-2R5MC | 2R5M  | 2.5 μH ±20%               | 6.6(5.5)                                  | 12.8                         | 11.0       | 10.5                                          |
| CDEP134NP-3R6MC | 3R6M  | 3.6 μH ±20%               | 10.8(9.0)                                 | 10.9                         | 9.1        | 8.0                                           |
| CDEP134NP-4R8MC | 4R8M  | 4.8 μH ±20%               | 12.0(10.0)                                | 9.3                          | 8.0        | 7.5                                           |
| CDEP134NP-6R4MC | 6R4M  | 6.4 μH ±20%               | 16.3(13.6)                                | 8.0                          | 6.8        | 7.0                                           |
| CDEP134NP-8R0MC | 8R0M  | 8.0 μH ±20%               | 18.4(15.3)                                | 7.2                          | 6.1        | 6.5                                           |

Electrical Characteristics - 2

| PART NO.          | STAMP | INDUCTANCE<br>[WITHIN] ※1 | D.C.R. (mΩ)<br>[MAX.] (Typ.)<br>(at 20°C) | SATURATION<br>CURRENT (A) ※2 |            | TEMPERATURE<br>RISE CURRENT<br>(A) ※3 ΔT=40°C |
|-------------------|-------|---------------------------|-------------------------------------------|------------------------------|------------|-----------------------------------------------|
|                   |       |                           |                                           | (at 20°C)                    | (at 100°C) |                                               |
| CDEP134NP-0R3NC-H | 0R3NH | 0.3 μH ±30%               | 1.9(1.6)                                  | 35.0                         | 32.0       | 18.5                                          |
| CDEP134NP-0R6NC-H | 0R6NH | 0.66 μH ±30%              | 2.5(2.1)                                  | 29.0                         | 24.0       | 17.0                                          |
| CDEP134NP-1R2MC-H | 1R2MH | 1.2 μH ±20%               | 3.7(3.1)                                  | 21.0                         | 17.6       | 15.0                                          |
| CDEP134NP-1R8MC-H | 1R8MH | 1.8 μH ±20%               | 6.6(5.5)                                  | 17.6                         | 14.4       | 10.5                                          |
| CDEP134NP-2R7MC-H | 2R7MH | 2.7 μH ±20%               | 10.8(9.0)                                 | 14.7                         | 12.0       | 8.0                                           |
| CDEP134NP-3R6MC-H | 3R6MH | 3.6 μH ±20%               | 12.0(10.0)                                | 12.5                         | 10.2       | 7.5                                           |
| CDEP134NP-4R8MC-H | 4R8MH | 4.8 μH ±20%               | 16.3(13.6)                                | 11.0                         | 9.0        | 7.0                                           |
| CDEP134NP-6R0MC-H | 6R0MH | 6.0 μH ±20%               | 18.4(15.3)                                | 9.6                          | 8.0        | 6.5                                           |

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% (while the inductance tolerance is ±30%) or 75% (while the inductance tolerance is ±20%) of its nominal.













※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

# SMD Power Inductor CDEP134



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

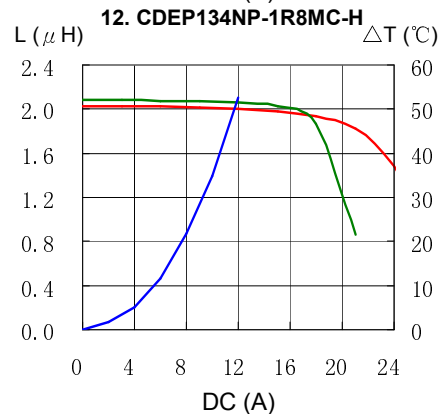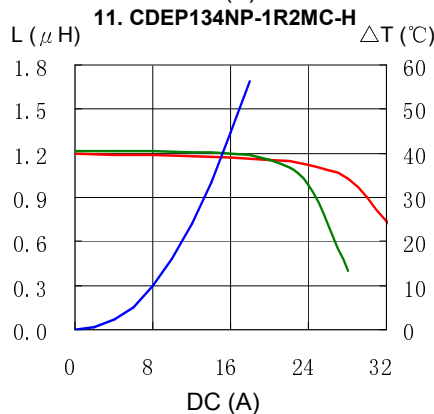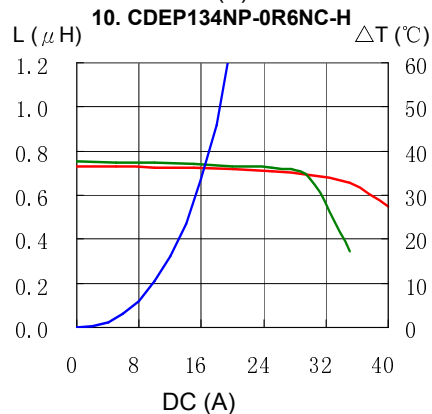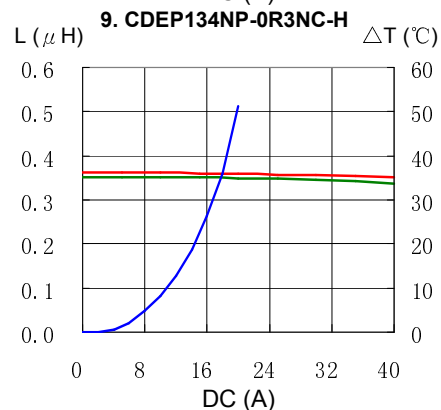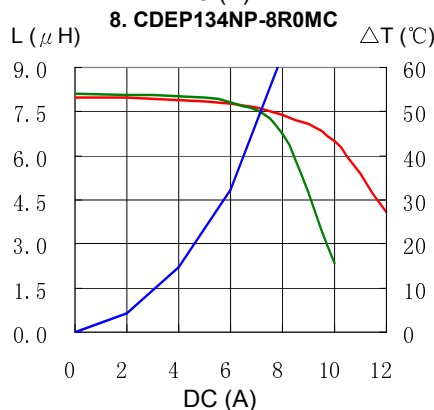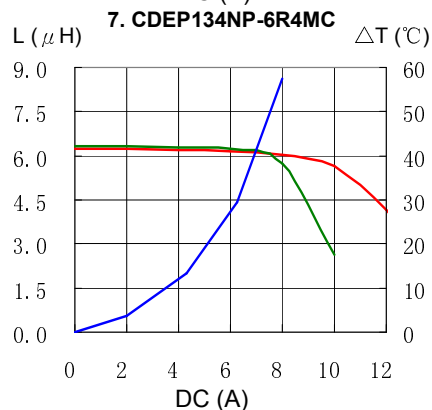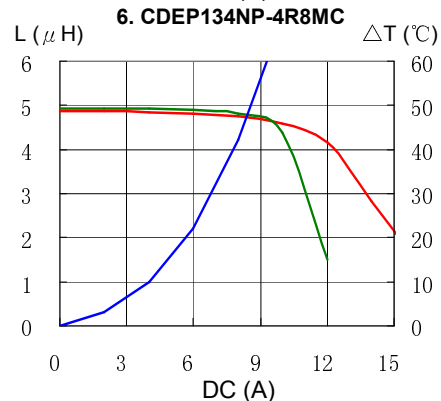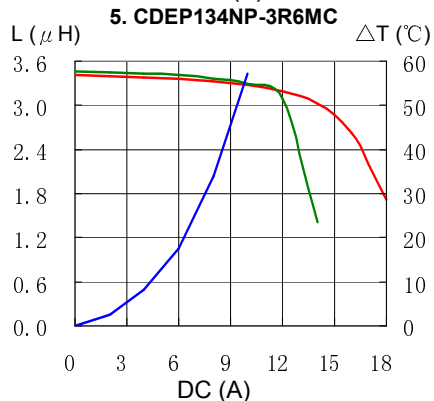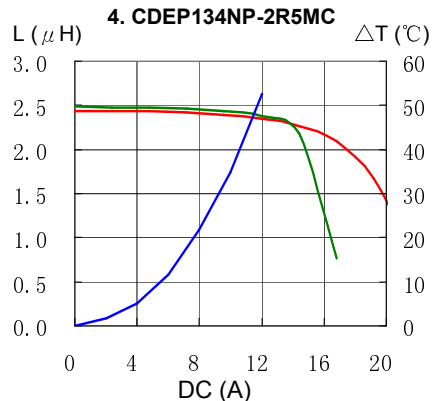
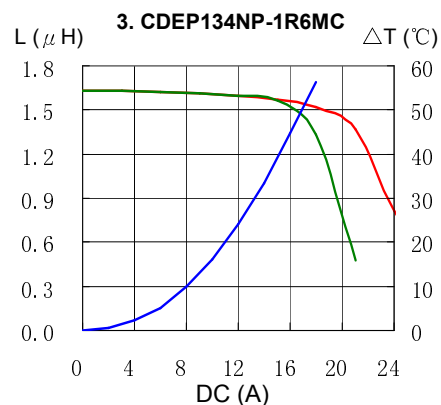
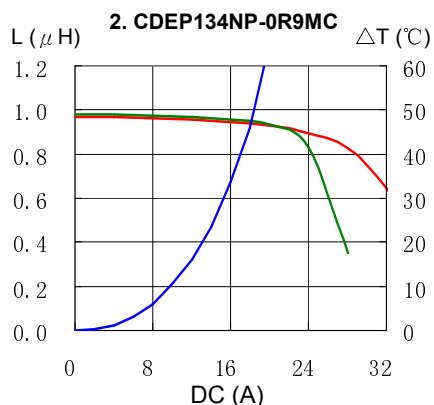
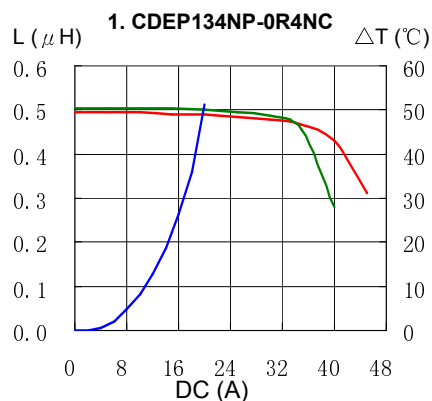


# SMD Power Inductor CDEP134





## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

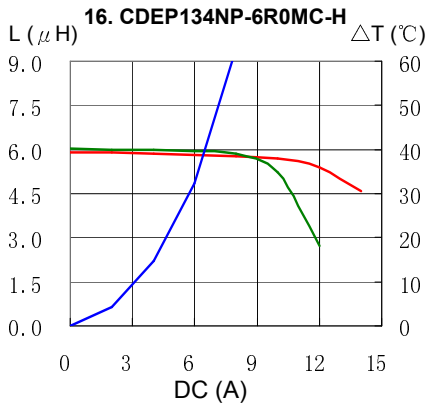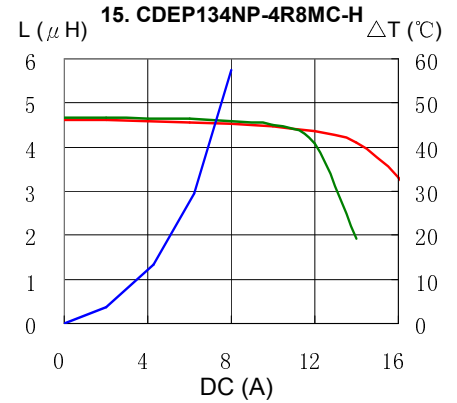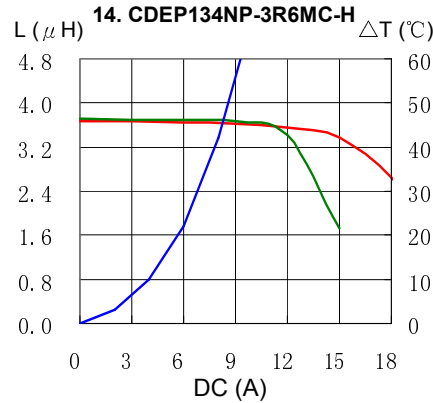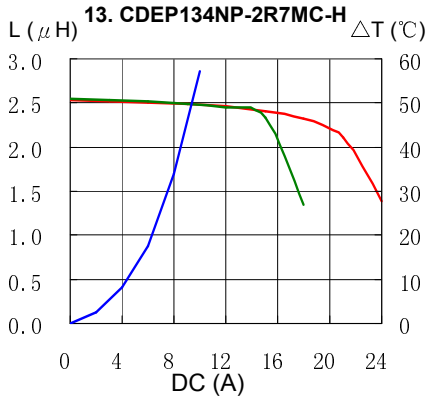

## Solder Reflow Condition

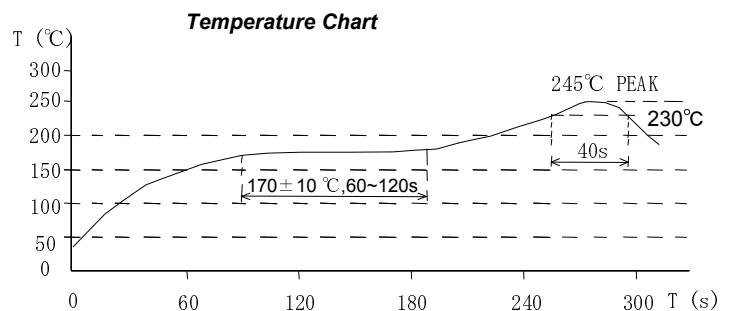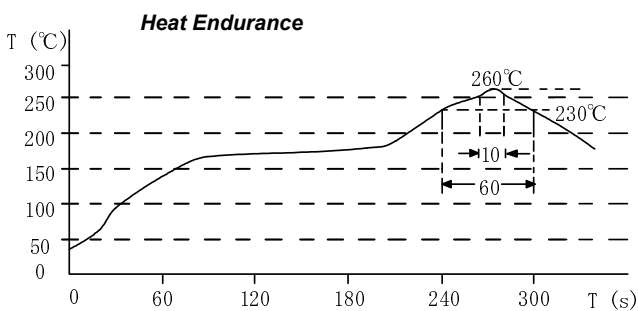

Please refer to the sales offices on our website - <http://www.sumida.com>

**Hong Kong**  
Tel. +852-2880-6781  
FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)  
**Saitama(Japan)**  
Tel. +81-48-691-7300  
FAX. +81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)  
**Chicago**  
Tel. +1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

**Shanghai**  
Tel. +86-21-5836-3299  
FAX. +86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)  
**Seoul**  
Tel. +82-2-6237-0777  
FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)  
**Obernzell**  
Tel. +49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

**Shenzhen**  
Tel. +86-755-8291-0228  
FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)  
**Singapore**  
Tel. +65-6296-3388  
FAX. +65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)  
**Neumarkt**  
Tel. +49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

**Taipei**  
Tel. +886-2-8751-2737  
FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)  
**San Jose**  
Tel. +1-408-321-9660  
FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)