



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

WIDEBAND FIXED ATTENUATOR FAMILY, DC - 25 GHz HMC652LP2E / HMC653LP2E / HMC654LP2E / HMC655LP2E

Typical Applications


The HMC652LP2E - HMC655LP2E are ideal for:

- Fiber Optics
- Microwave Radio
- Military & Space
- Test & Measurement
- Scientific Instruments
- RF / Microwave Circuit Prototyping

Features

- 4 Attenuator Products:
- 2, 3, 4 & 6 dB Fixed Attenuation Levels
- Wide Bandwidth: DC - 25 GHz
- Excellent Attenuation Accuracy
- Power Handling: +25 dBm
- 6 Lead 2x2 mm SMT Package: 4 mm²

Functional Diagram

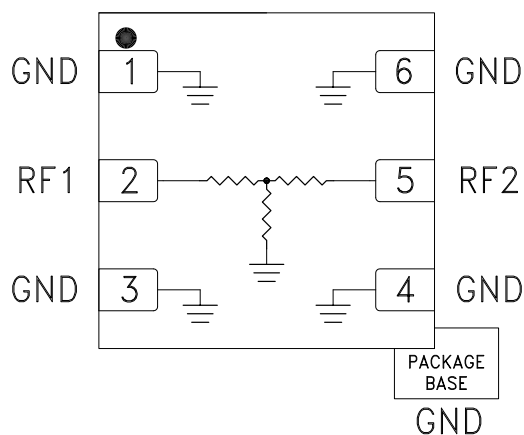

General Description

The HMC652LP2E / 653LP2E / 654LP2E / 655LP2E are a line of wideband fixed value SMT 50 Ohm matched attenuators which offer attenuation levels of 2, 3, 4 and 6 dB respectively. These passive attenuators are ideal for military, test equipment, and other wideband applications where extremely flat attenuation, and excellent VSWR vs. frequency are required.

These wideband attenuators handle up to +25 dBm of input power, and are compatible with high volume surface mount manufacturing techniques.

Electrical Specifications, $T_A = +25^\circ\text{C}$, 50 Ohm system

| Part Number | Attenuator Value | Return Loss (Min.) | Return Loss (Typ.) | Attenuation Tolerance ^[1] | Temperature Coefficient (Typical) ^[2] | Units |
|-------------|------------------|--------------------|--------------------|--------------------------------------|--|-------|
| | | | | | | |
| | | | | DC - 25 | | GHz |
| HMC652LP2E | 2 dB | 7.0 | 22.0 | ± 0.5 | 0.0004 | dB |
| HMC653LP2E | 3 dB | 7.0 | 23.0 | ± 0.5 | 0.0006 | dB |
| HMC654LP2E | 4 dB | 7.0 | 20.5 | ± 0.5 | 0.0006 | dB |
| HMC655LP2E | 6 dB | 7.0 | 16.5 | ± 0.5 | 0.0004 | dB |


[1] Attenuation Tolerance is valid over temperature.

[2] Temperature Coefficient Units are dB/ °C.


HMC652LP2E TO HMC655LP2E

WIDEBAND FIXED ATTENUATOR FAMILY, DC - 25 GHz HMC652LP2E / HMC653LP2E / HMC654LP2E / HMC655LP2E

Attenuation vs. Temperature

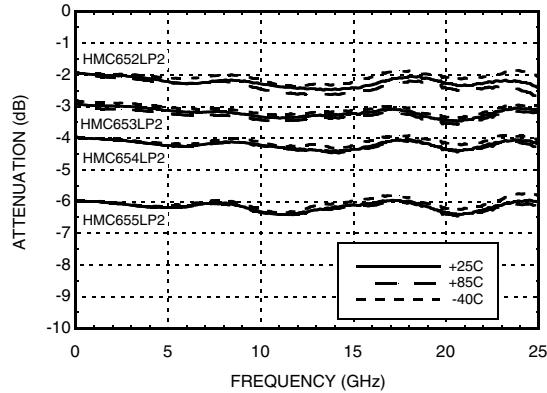

Return Loss

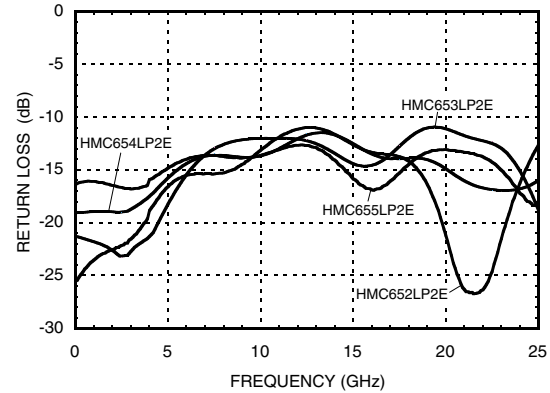

Absolute Maximum Ratings


| Part Number | HMC652LP2E | HMC653LP2E | HMC654LP2E | HMC655LP2E | Units |
|-----------------------|-------------|------------|------------|------------|-------|
| RF Input Power (CW) | 27 | 26 | 25 | 26 | dBm |
| DC Voltage Terminated | 5.6 | 5.2 | 4.9 | 5.2 | V |
| DC Voltage Open | 5.6 | 5.1 | 4.6 | 6.0 | V |
| Storage Temperature | -65 to +150 | | | | °C |
| Operating Temperature | -40 to +85 | | | | °C |
| ESD Sensitivity (HBM) | Class 1A | Class 1A | Class 1A | Class 1A | |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

WIDEBAND FIXED ATTENUATOR FAMILY, DC - 25 GHz HMC652LP2E / HMC653LP2E / HMC654LP2E / HMC655LP2E

Outline Drawing

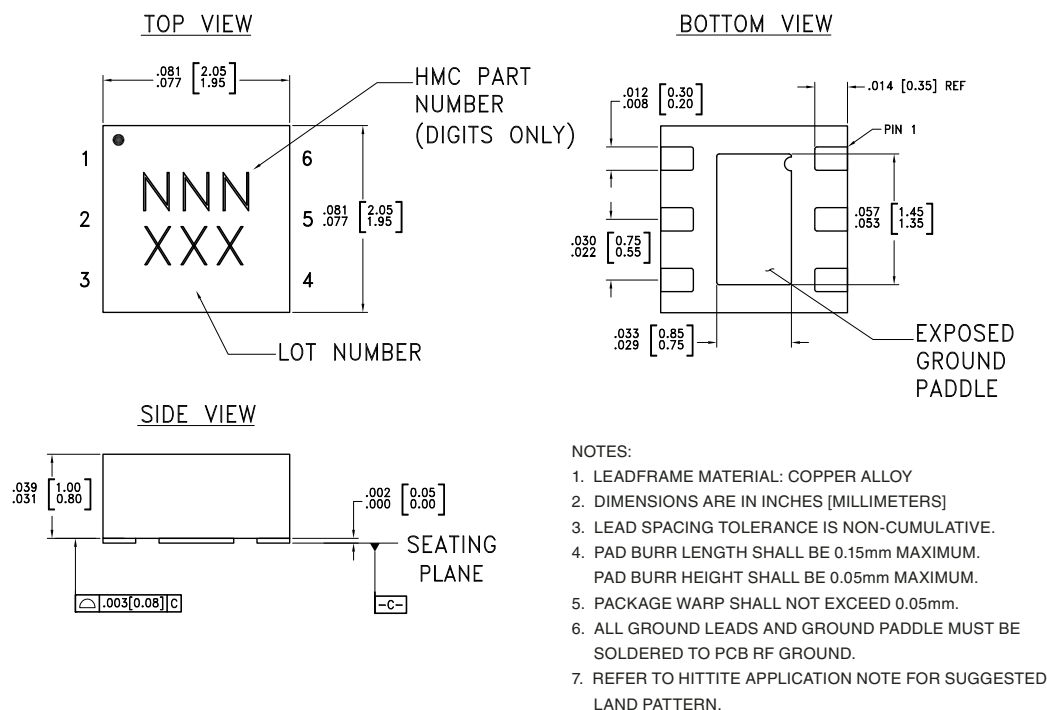



Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[1] |
|-------------------------------|--|---------------|---------------------|--------------------------------|
| HMC652LP2E through HMC655LP2E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | NNN XXX |

[1] 3-Digit lot number XXX

[2] Max peak reflow temperature of 260 °C


Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------|----------|--|---|
| 1, 3, 4, 6 | GND | Package bottom must be connected to RF/DC ground. |  |
| 2, 5 | RF1, RF2 | This pin is DC coupled and matched to 50 Ohms. Use DC Blocking capacitors if the input / output signals have non-zero DC potential |  |

HMC652LP2E TO HMC655LP2E

WIDEBAND FIXED ATTENUATOR FAMILY, DC - 25 GHz HMC652LP2E / HMC653LP2E / HMC654LP2E / HMC655LP2E

Evaluation PCB

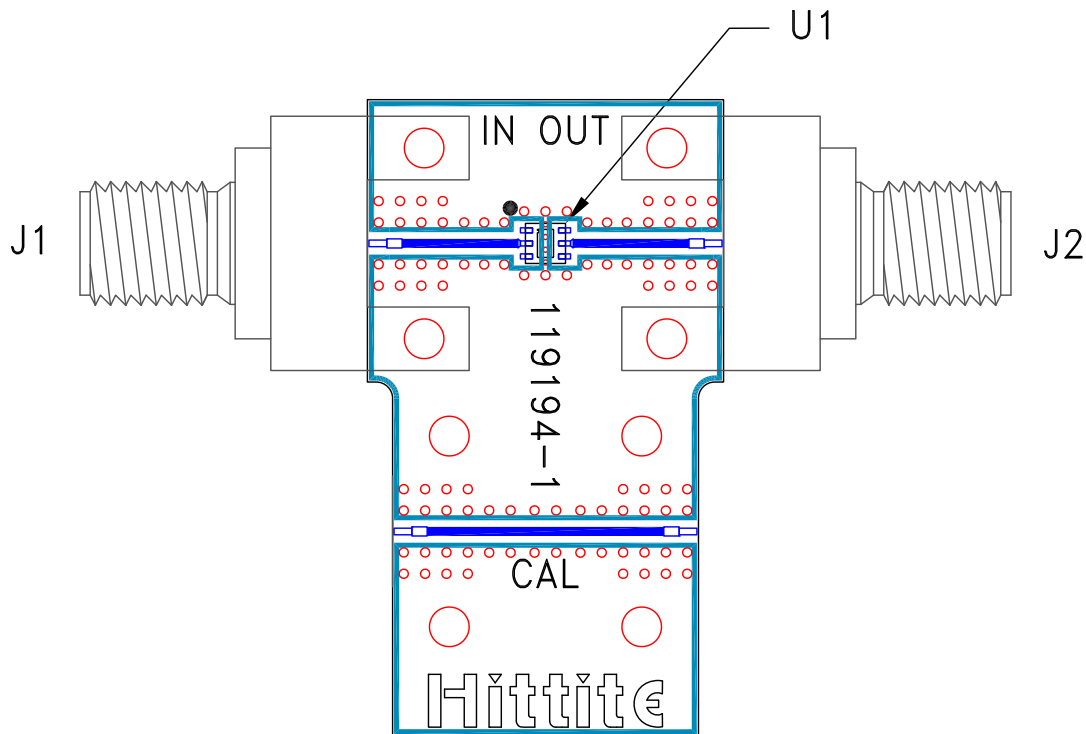

List of Materials for Evaluation PCB 119197 ^[1]

| Item | Description |
|---------|---|
| J1 - J2 | PCB Mount K Connector |
| U1 | HMC652LP2E through HMC655LP2E Passive Attenuators |
| PCB [2] | 119194 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com