

SPECIFICATIONS

Material :HEXSEAL: Silicone rubber conforms to A-A-59588 Class III, GR 50 (unless otherwise specified)


Pressure Range :Exceeds 15 psi internal and 1500 psi external. (N5032B: 10 psi)

Operational Life: 500,000 actuations (minimim).

Temperature Range :HEXSEAL :-94°F to +400°F

Shelf Life :Excess of 25 years.

Resistant to :Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

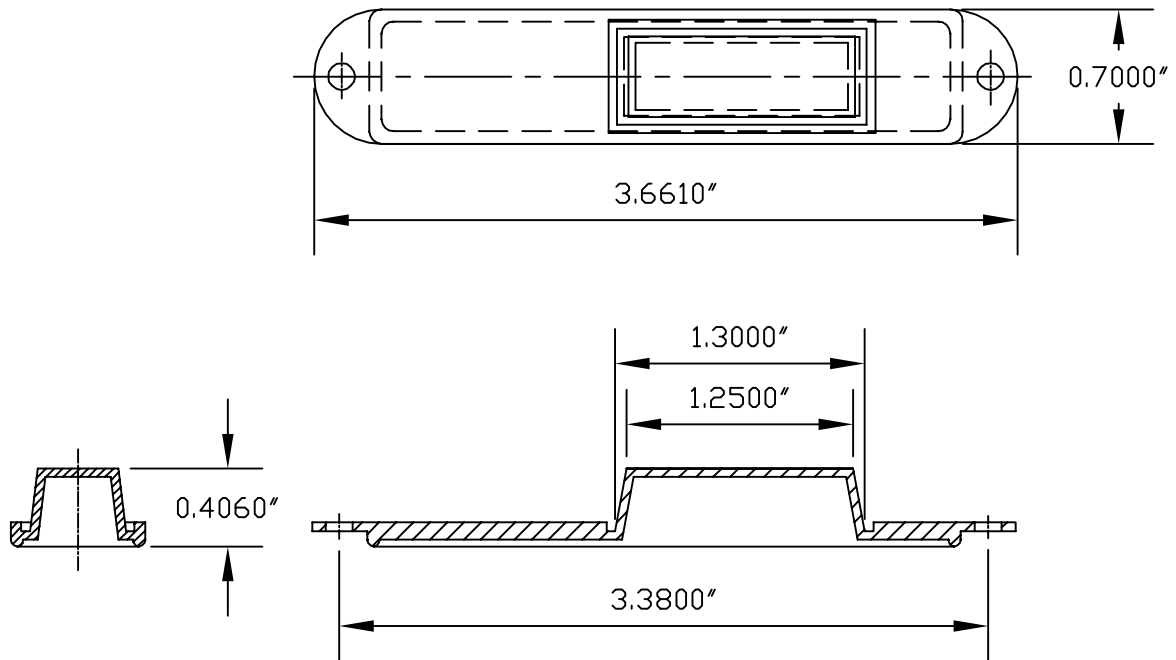

B	MAT'L CHANGED		S. GOK
A	CAD COMPUTER GENERATED		06.06.08
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION. MAT'L: SILICONE RUBBER A-A-59588 CL III GR50		ENG.	
		DWN.	CARBONE
		CHKD.	NICK
FINISH: BLACK		SCALE	DWG. NO.
APM-HEXSEAL CORPORATION		1 : 1	1211/14

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com