

SERIES 95C


6mm x 3.5mm

FEATURES

- Excellent Tactile Feedback
- Thru-hole and Gull Wing Versions
- Surface Mount Versions Compatible with SMT Assembly Including Infrared and Vapor Phase
- Ultraminiature and Lightweight Structure Suitable for High Density Mounting

APPLICATIONS


Used in applications such as consumer electronics, audio equipment, PCs, VCRs, cable boxes, modems, communications equipment, controls, security and alarm equipment, and test and measurement equipment.

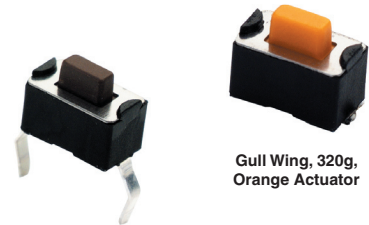

Thru-Hole, 160g, Brown Actuator

Gull Wing, 320g, Orange Actuator

DIMENSIONS in inches (and millimeters)

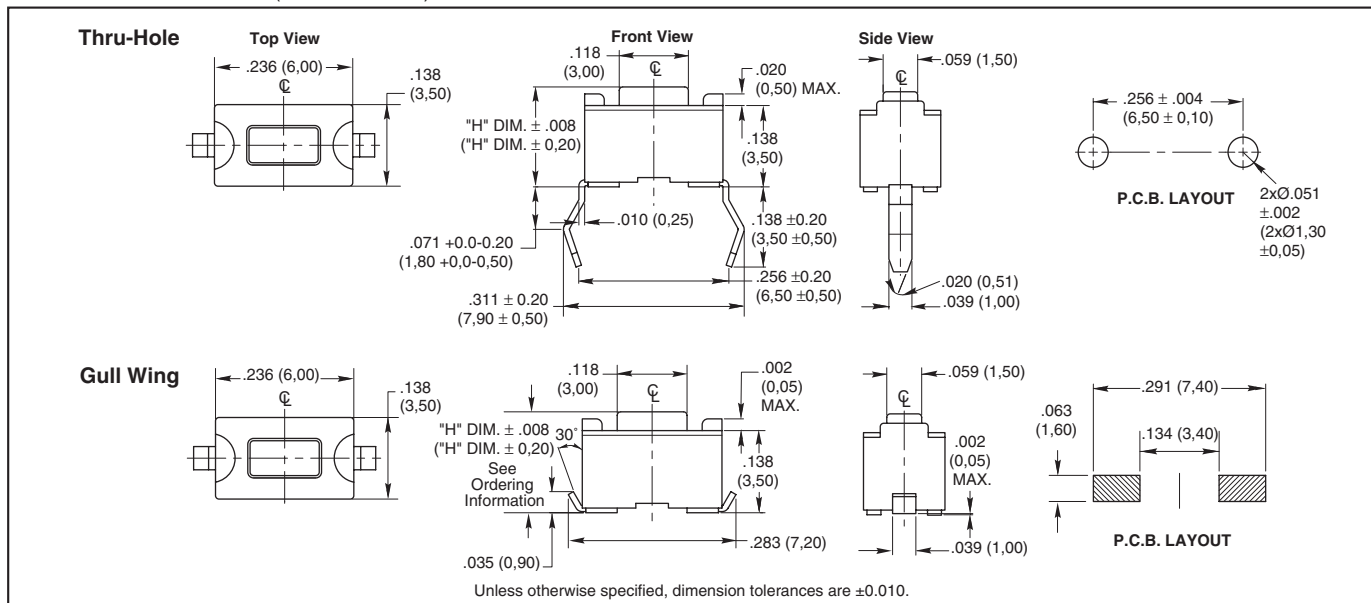

SPECIFICATIONS

Materials

- Base:** UL94V-0 Nylon thermoplastic
- Cover:** Stainless steel
- Actuator:** UL94V-0 Nylon thermoplastic
- Terminal:** Brass with silver-plating
- Contact:** Stainless steel with silver-plating

Electrical


- Rating:** 50mA, 12 Vdc
- Life:** 50,000 cycles
- Actuator Travel:** .010" + .008"/ - .004"
- Contact Resistance:** 100 m Ω max.
- Insulation Resistance:** 100 M Ω min at 500Vdc

- Dielectric Strength:** No dielectric breakdown after 250V after one minute
- Contact Arrangement:** single pole, single throw

Environmental

- Operating Temperature Range:** -25 to 70°C
- Storage Temperature Range:** -30 to 80°C
- Mechanical Shock:** MIL-STD-202F, Method 213B, Test Condition A. Gravity: 50G (peak value), 11 msec. Direction and times: 6 sides and 3 times in each direction. High reliability.

CIRCUITRY

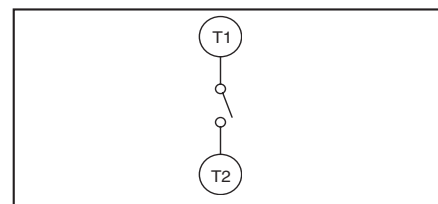

Vibration: MIL-STD-202F, Method 201A. Passed 6 hours (2 hours in each) of three perpendicular planes at a cycle of 10-55-10Hz/minute.

Soldering Process

- Hand Soldering:** Use a soldering iron of 30 watts, controlled at 350°C for 5 seconds maximum while applying solder.
- Reflow Soldering** (surface mount versions only): Peak temperature 260°C (500°F).
- Wave Soldering:** 260°C (500°F) max. for 5 seconds. Subject to P.C.B. .063 in. (1,6mm) thickness.

Packaging

Thru-Hole: 135 pcs/tube. Surface Mount: 135 pcs/tube, 1800 pcs/reel (.169" height), 1600 pcs/reel (.197" height).

ORDERING INFORMATION

<p>95C04A3GWRT</p>	Series	95C
	Size: 04 = 3.5mm x 6mm	04
	Height ("H"): A = .169 (4,30), B = .197 (5,00)	A B
	RoHS compliant	A
	Packaging: Blank = Tube, R = Tape and Reel (see pkg note)	R
	Terminal Style: Blank = Thru-Hole, GW = Gull Wing	GW
Operating Force: 3 = 160g (brown), 5 = 320g (orange)	3	

Available from your local Grayhill Component Distributor.

For prices and discounts, contact a local Sales Office, an authorized local distributor, or Grayhill.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com