




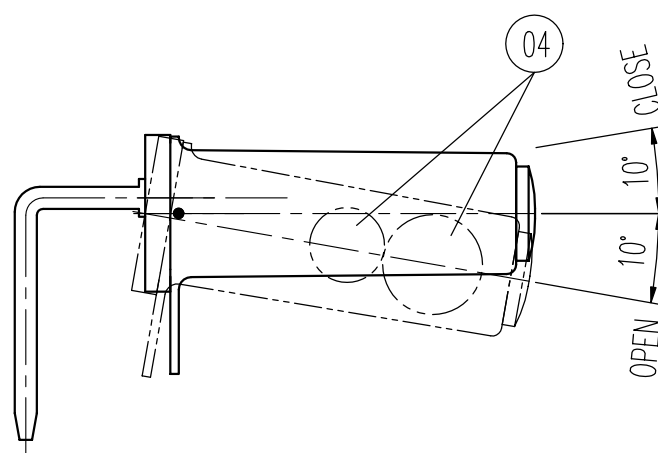


示意图 SCHEMATIC

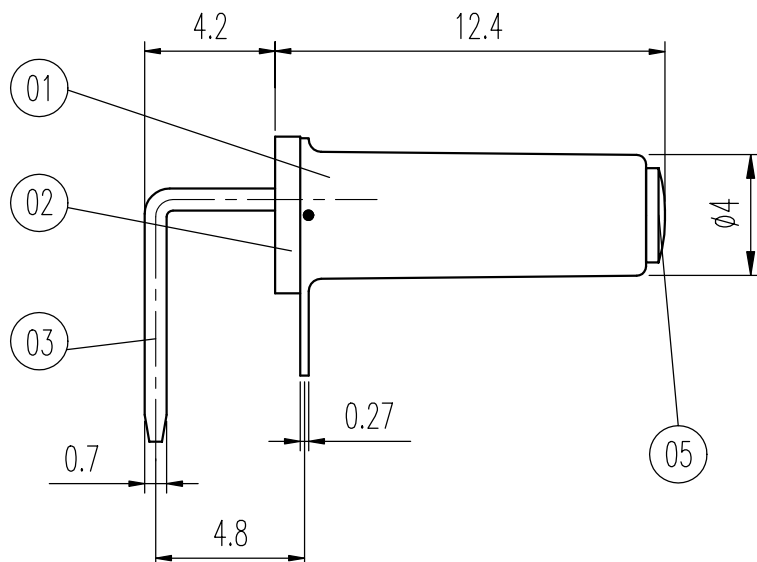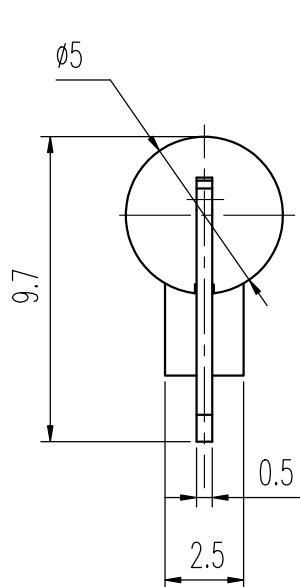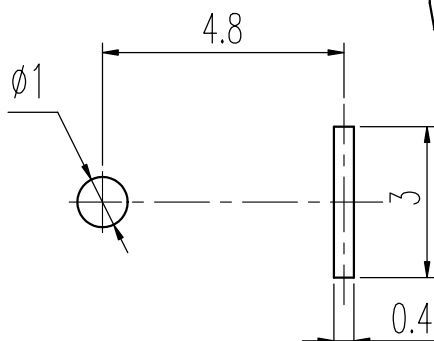

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	Maximum: 5V DC 1mA Resistive Load
	Minimum: 1V DC 10mA Resistive Load
绝缘电阻 Insulation Resistance	DC 100V 60±5Sec.1000MΩ Min.
抗电强度 Dielectric Voltage	AC 500V 60±5Sec.
负荷寿命 Operating Life With Load	100,000cycles次

05	铆钉 RIVET	C2680R	1	Ni PLATED				
04	铜珠 BRASS BALL	BRASS	2	Au PLATED				
03	端子 TERMINAL	C2680R	1	Au PLATED				
02	胶盖 COVER	PA	1	BLACK C				
01	外壳 FRAME	C2680R	1	Ni PLATED	标号REV	内容 DESCRIPTION	签名SIGN.	日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM3053			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	ROLLING BALL SENSOR		ITEM NO	RB-231X2		
UNDER 1	± 0.10	DRAWN	杨碟	2008-11-25	VERSION	A01	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	王光云	2008-11-25	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	程先金	2008-11-25	PROJECTION			

COMAX

高铭电子(惠州)有限公司
Comax Electronics(Huizhou)Co.,Ltd.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com