


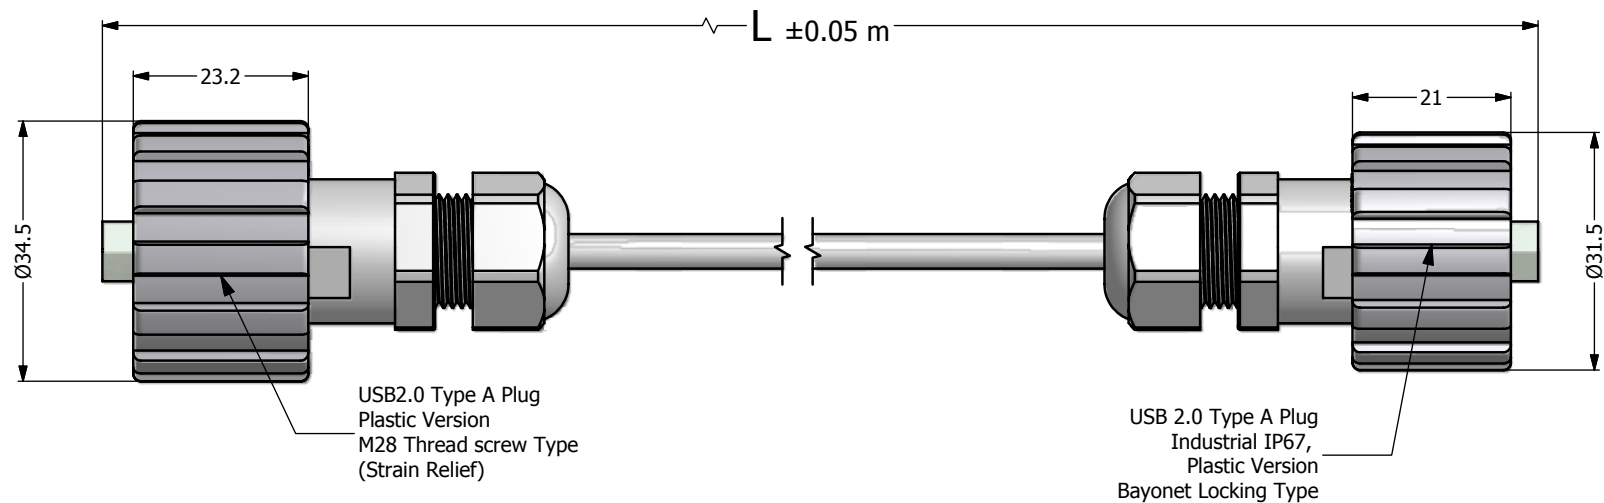

NOTES:

1. Electrical Specifications:

- Meets USB 2.0 specifications
- Low level Contact Resistance: 30 mOhm max.
- Insulation Resistance 1000 MOhm min.
- Currant Rating: 1.5 A max. @ 25°C
- DWV: 500 VAC/60s at sea level
- Operating Temperature: -40°C to +80°C

2. Material and Finish:

- Coupling Ring: Polyester (Black); UL94 V-0
- Plug Housing: Polyester (Black); UL94 V-0
- Interfacial Seal: Silicone, Color: White
- Cable Gland: PA (Black); UL94 V-0
- Cable Gland Seal: NBR, Color: Black
- USB Insulator: PBT, UL 94V-0, Color: White
- USB Metal Shell: SPCC. Nickel plated
- USB Contact: Copper Alloy, 30 u" min. Au over 40 u" min. Nickel Plated

3. Shielded USB Cable Configuration

AWM 2725 AWG28/1p + AWG24/2c, OD: 4.5 mm Color: black

4. RoHS compliant

Directive 2002/95/EC
"RoHS"
Compliant

Cable Length L	Part Number
2 m	17-200541
3 m	17-200551
4.5 m	17-200561

THIS DRAWING MAY NOT BE COPIED, OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:			Tolerance Unless otherwise specified 0 PLC ±0.30 1 PLC ±0.20 2 PLC ±0.10 3 PLC ±0.05 ANGLES ±1°		Scale: 1.5:1	Dim. in m
	Name	Title	Approval Date			Material: See Notes	
						Title: USB Patch Cord	
						USB 2.0 Type A Plug (Strain Relief)	
						to USB 2.0 Type A Plug (Industrial)	
						Drawing No.: 17K1A132	
						Part No.: SEE P/N ABOVE	
						DIN A3	
						Sheet 1/1	

CONEC

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com