


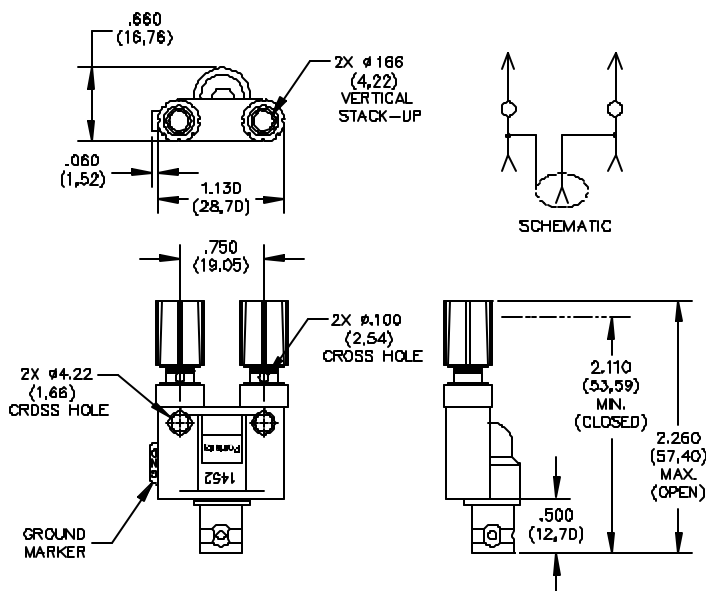

FEATURES:

- Permits single or double banana plugs to be used with equipment having a BNC male.
- Cross holes 4.2 (.166) dia. in body provide side stack up connections.

MATERIALS:

Upper Conn: Binding Posts, Insulated.

Material: Binding post body, brass H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plated per QQ-N-290, class 2 (.0002 min.).

Insulation: Acrylonitrile-Butadiene-Styrene, molded to binding posts and BNC receptacle.

Color: One Red and one Black (Gnd).

Operating Temp.: +115°C. (+239°F.) Max.

Marking: "POMONA 1452."

Lower Conn: BNC receptacle, comparable to UG 1094/U.

Finish: Body and fittings, tarnish resistant.

Nominal Impedance: 50 Ohms.

RATINGS

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage : Hand-held testing: 30 VAC/60 VDC Max.

Hands free testing in controlled voltage environments: 500 VRMS.

ORDERING INFORMATION: Model 1452

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90545 (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com