SPECIFICATIONS

Material: HEXSEALS: Silicone rubber conforms to A-A-59588 Class III,

GR 60 unless otherwise specified.

Mounting Nut: HEXSEALS: Brass, nickel-plated (unless otherwise

noted)

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external.

Operational Life: 50,000 actuations (minimum).

Shelf Life: Excess of 25 years.


Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils


Agency Recognition: E-SEEL and HEXSEAL are UL listed to UL Std.

50 types 1-13, and meet CSA standards.

Installation: If a reducing adaptor is required- see page 14 of

HEXSEAL catalog HEX200 for part numbers and drawing.

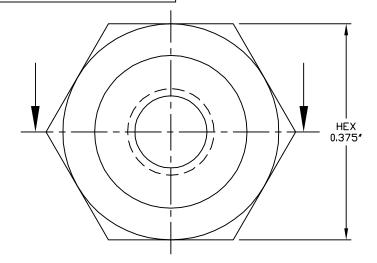

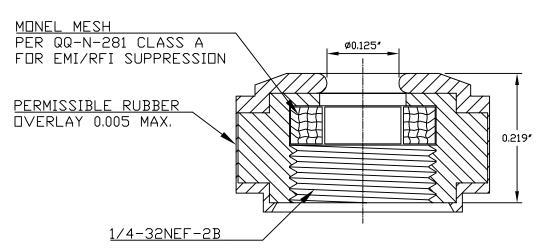

G MAT'L CHANGED ar	MAT'L CHANGED and REDRAWN		S. GOK	07.13.09
	CAD COMPUTER GENERATED			09.23.02
E SLASH NO. 29, INSE	SLASH NO. 29, INSERT THREAD WAS 3/8-32 NEF-2B			10.17.77
REV.	DESCRIPTION			DATE
MAXIMUM AND MINIMUM MEASURE- MENTS ARE STATED DIRECTLY ON	님 EMI/RFI BOOT, ROTARY SEAL	ENG.		
EACH DIMENSION.	(N9040x1/8 RFI)	DWN.	N. K. S.	01.18.67
MAT'L: Silicone Rubber conforms to	(119040X1/6 KF1)	CHKD.	M. M.	01.18.67
A-A-59588, Gr. 60		SCALE	⁹ N9040x1	1/8 RFI
FINISH: GRAY	APM-HEXSEAL CORPORATION	6:1	HEXSE	

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

➤ Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com