

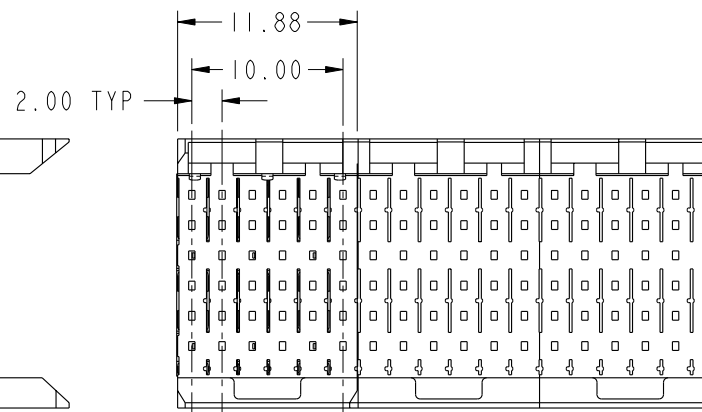


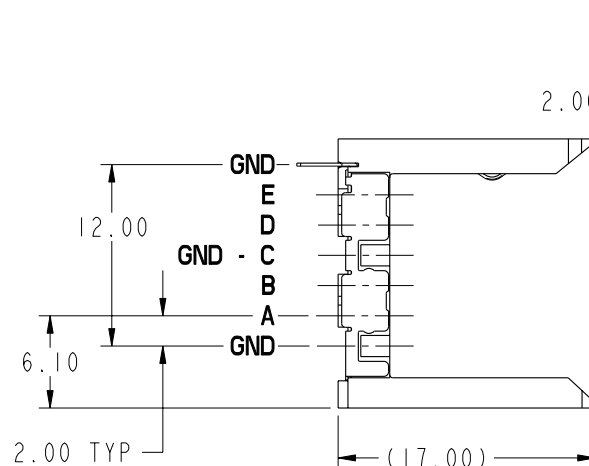

PRODUCT NUMBER	GROUND SPRING CONTACT FINGERS PLATING PERFORMANCE LEVEL	GROUND SPRING EON PRESS FIT TAIL PLATING
84621-101	TELCORDIA CO	STANDARD (SnPb)
84621-101LF		LEAD FREE (Sn)
84621-301	CUSTOMER SPECIAL	STANDARD (SnPb)
84621-301LF		LEAD FREE (Sn)
84621-501	TELCORDIA UE	STANDARD (SnPb)
84621-501LF		LEAD FREE (Sn)

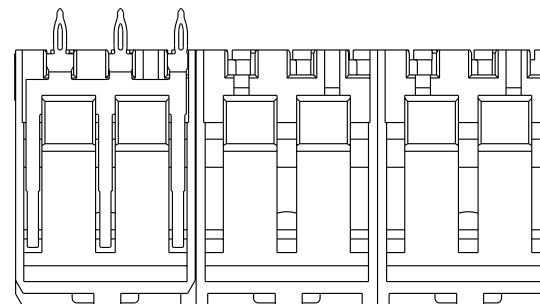

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.1	projection	COPY	title VERTICAL SIGNAL HDR SHROUD 5 ROW, PRESS-FIT 30 POS. STD.	product family METRAL 2000
A	V90180	L-IV	1999-04-13		0.XX ±0.05				
B	V94089	MRS	1999-11-18	angles	.XXX ±.020	MM	scale 2:1	size A	dwg no 84621
C	VI2224	EPK	2001-09-13		0° ±2°				
D	V05-0797	VS	2005-08-31	dr	E. KROPER.	2001-09-13	code 213 sheet 1 of 3	cage code 22526	4
E	V06-0544	DCH	2006-06-12	enrg	J. VOLSTORF	2001-09-13			
F	V07-0677	HTB	2007-11-14	chr	J. VOLSTORF	2001-09-13			
G	V08-0072	HTB	2008-02-11	appd	J. VOLSTORF	2001-09-13			
sheet index	revision sheet	G 1	G 2	G 3					

Pro/E


cage code 22526

PDM: Rev:G

STATUS: Released

Printed: May 13, 2011

PRODUCT NUMBER
SEE SHEET 1

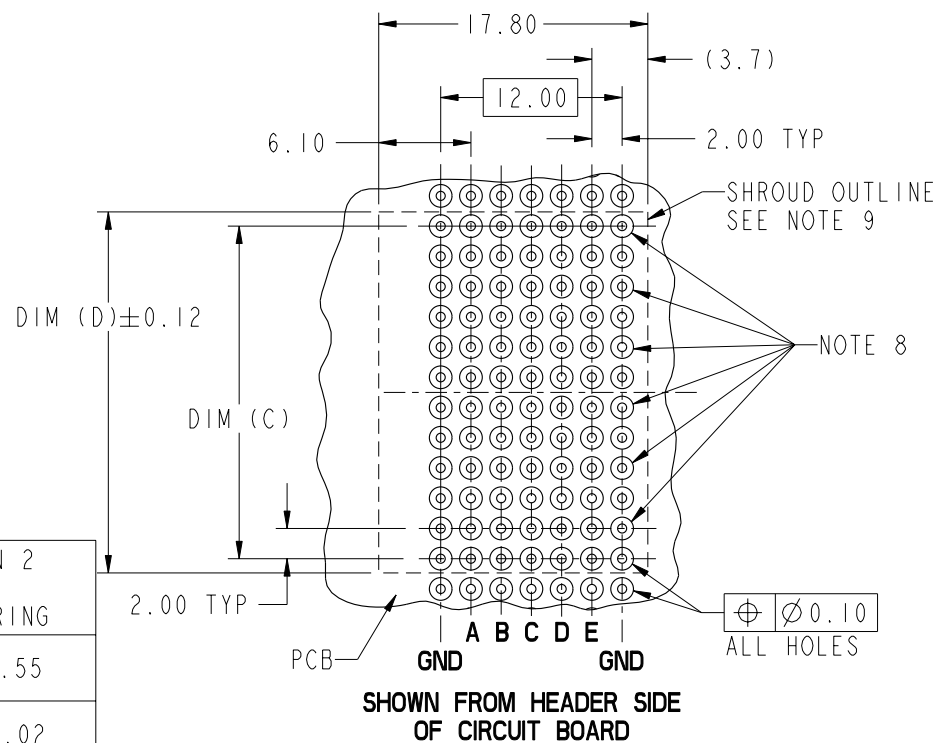

PRESS-FIT HOLES	OPTION 1 ROWS GND-PIN, A,B,C,D,E	OPTION 2 ROW GND-SPRING
HOLE DIAMETER AFTER PLATING	0.65-0.80	0.45-0.55
DRILLED HOLE	0.81-0.86 (0.85 DRILL)	0.60±0.02
COPPER PLATING	0.025 MIN	0.025 MIN
SnPb PLATING	0.005-0.015	0.005-0.015

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ± 0.1	projection	COPY	title VERTICAL SIGNAL HDR SHROUD 5 ROW, PRESS-FIT 30 POS. STD.	product family METRAL 2000
G					0.XX ± 0.05				
					.XXX ± .020				
				angles	0° ± 2°	MM scale 2:1	A	size 84621	code 213 sheet 2
				dr	E. KROPER. 2001-09-13				
				enrg	J. VOLSTORF 2001-09-13				
				chr	J. VOLSTORF 2001-09-13	scale 2:1	A	size 84621	code 213 sheet 2
				appd	J. VOLSTORF 2001-09-13				
sheet index	revision sheet								





This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



PRODUCT NUMBER
SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."
3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
GROUND SPRING MATERIAL: PHOSPHER BRONZE
STRIPLINE SHIELDED MATERIAL: PHOSPHER BRONZE
6. PLATING INFORMATION: SEE TABLE
7. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm
SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD.
8. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD.
ALL OTHER HOLES ARE FOR THE HEADER.
9. THE 'SHROUD OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
10. CURRENT RATING: 1 AMP PER PIN
11. TEMPERATURE RANGE: -55°C TO +105°C
12. PRODUCTS WHERE THE PART NUMBERS ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
13. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
FOR LEAD FREE PART NUMBERS, ADD 'LF' SUFFIX EXAMPLE:84621-X01LF

mat'l code SEE NOTE 5				tolerances unless otherwise specified			CUSTOMER		 www.fciconnect.com						
lfr	ecr no.	dr	date	linear	0.X ±0.1		COPY		title VERTICAL SIGNAL HDR SHROUD 5 ROW, PRESS-FIT 30 POS. STD. 						
G					0.XX ±0.05		projection								
					.XXX ±.020										
				angles	0° ±2°										
				dr	E. KROPER.	2001-09-13	product family						METRAL 2000		code
				enrg	J. VOLSTORF	2001-09-13	size						dwg no		213
				chr	J. VOLSTORF	2001-09-13	scale								sheet
				appd	J. VOLSTORF	2001-09-13	2:1						A		84621
sheet index		revision sheet													

title
VERTICAL SIGNAL HDR SHROUD
5 ROW, PRESS-FIT 30 POS. STD.

product family METRAL 2000
size
A
dwg no
84621
code
213
sheet
3

cage code
22526

Pro/E

3

4

PDM: Rev:G

STATUS: Released

Printed: May 13, 2011

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com