


# Evaluation Board User's Guide

## DAC161S055 16-Bit, Low Glitch, Buffered Voltage-Output Digital to Analog Converter

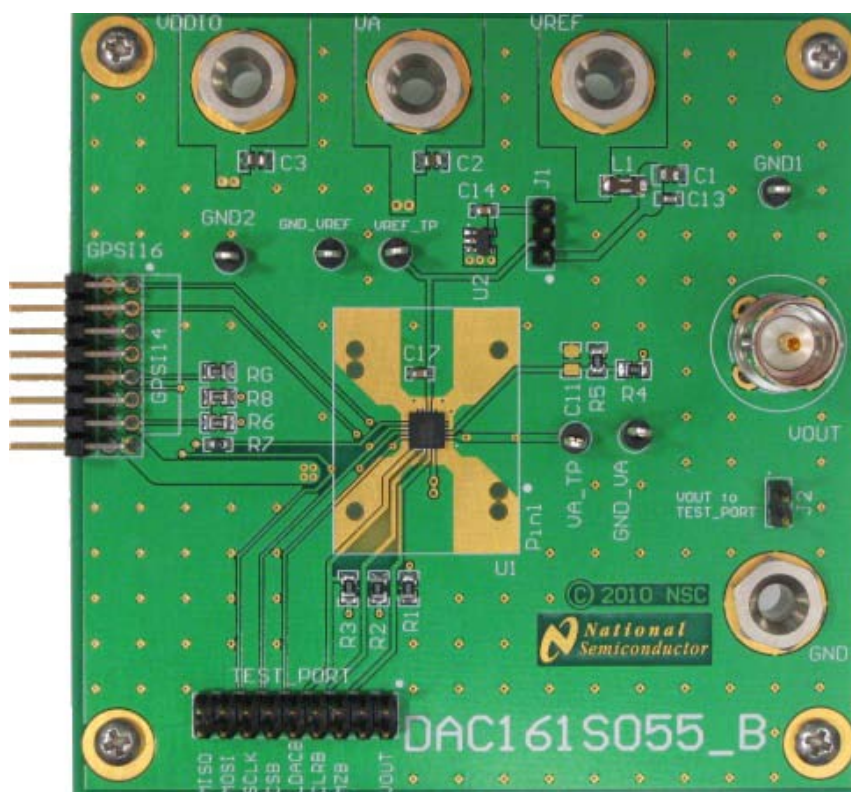

## 1. Introduction

The DAC161S055 Evaluation Board Design Kit (consisting of the DAC161S055 Evaluation Board, this User's Guide and the optional SPUSI2 board from National Semiconductor) is intended to ease evaluation and design-in of the National Semiconductor DAC161S055 16-bit Digital to Analog Converter.

The evaluation board can be used in either the 'Stand-Alone mode' or the 'Computer mode'. In the 'Stand-Alone mode', the user can interface to the part using the on board TEST\_PORT with external pattern generators and other suitable test equipment or with a ribbon cable attached to their microprocessor's evaluation board.

In the 'Computer mode', data can be sent to the DAC161S055 using the SPUSI2 board and the TinyI2CSPI software. The SPUSI2 board can be purchased, and the TinyI2CSPI software downloaded for free, at <http://www.national.com/analog/webench/sensors/spusi2>. The TinyI2CSPI software operates under Microsoft Windows and allows the user to send and receive individual SPI transactions. The TinyI2CSPI software therefore will be useful for applications where you want to set an output value and observe that value.

## 2. Board Assembly

The DAC161S055 evaluation board comes fully assembled and ready for use. Refer to the Bill of Materials for a description of components, to Figure 1 for major component placement, and to the schematic at the end of this document.

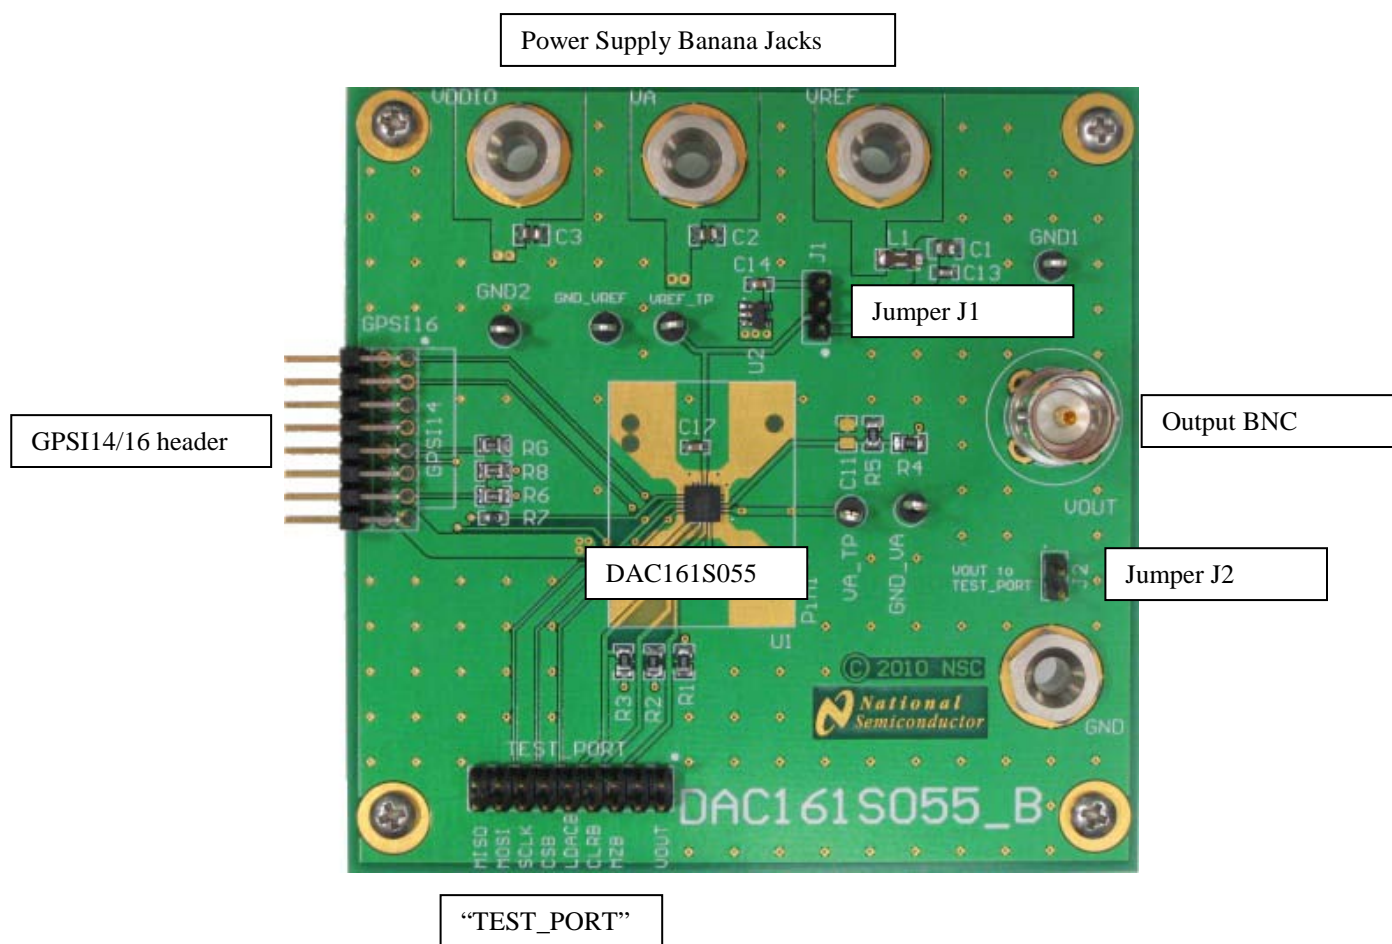


Figure 1: Location of major components

VREF_TP, GND_VREF	VREF test point and ground. Located above the DAC161S055
VA_TP, GND_VA	VA external supply and ground. Located between the part and the Vout BNC

**Table 1: Test Points on the DAC161S055 Evaluation Board**

GPSI16/GPSI14	16 pin dual row right angle male header. Connect 14 pin to SPUSI board. The 16 pin are for forward compatibility.
TEST_PORT	18 pin dual row male header. Allows access to SPI signals, Vout, and on board control signals. Allows for grounding of control signals (LDACB, MZB, CLRB) using a jumper.

**Table 2: Connectors on the DAC161S055 Evaluation Board**

J1	Selects reference source for VREF – either external or on board LM4120-4.1.
J2	Connects Vout to the TEST_PORT.

**Table 3: Jumpers**

### 3. Quick Start

The fastest way to start using the DAC161S055 evaluation board is to use it in Computer Mode with the SPUSI2 board and the TinyI2CSPI software.

#### 3.1 Computer Mode

You will need a power supply for VA and a power supply for VDDIO. If you choose to use an external reference, you will also need a power supply VREF.

- For using the external VREF from the banana jack, connect pin 1 to pin 2 on jumper J1.
- To use the onboard LM4120-4.1 regulator, connect pin 3 to pin 2 on jumper J1.
- Determine if you want to start up at zero or mid scale for the DAC output. If zero, connect pins 5 (gnd) and 6 (MZB) on the TEST\_PORT header.
- Determine if you would like to have the DAC update every time you write data to it (instead of having to write data and then write an update command). If so, short pins 9 and 10 (gnd and LDACB) on the TEST\_PORT header.
- Connect the SPUSI2 board to the DAC161S055 evaluation board. Ensure that you line up the SPUSI2 board with the GPSI14 pins as shown on the board (see Figure 2 ). Note that one set of pins will not match the header.
- Connect the power (VA and VDDIO, optionally VREF) to the board and turn on the supplies.
- Connect the SPUSI2 board to your computer via the USB cable.

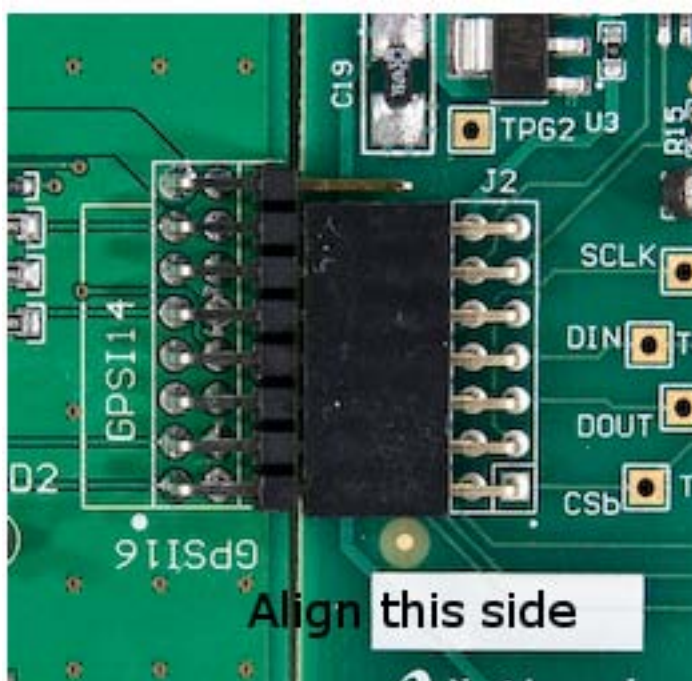


Figure 2: DAC161S055 Eval board connected to SPUSI board.

- Start the TinyI2CSPI software on your computer.
- Once the program has started, select “Add SPI” to get an SPI interface window.
- The settings needed to communicate with the DAC161S055 are
  - CS=1
  - CKPOL=0
  - CKPHA=0
  - Bits=24
- Type the command (in HEX) that you wish to send to the DAC161S055 into the MOSI field. See Figure 3 for some example commands. Pressing “Execute” will send the command to the DAC.
- The MISO field will update once “Execute” is pressed. It will be '00 0000' for the first execution. It will be the last command for each subsequent execution as long as a clear command has not been sent.
- The DAC output will be available at the Vout BNC after executing a command that updates the output.
- Go to <http://www.national.com/analog/webench/sensors/spusi2#tinyi2cspi> to download the TinyI2CSPI personality file for this board.

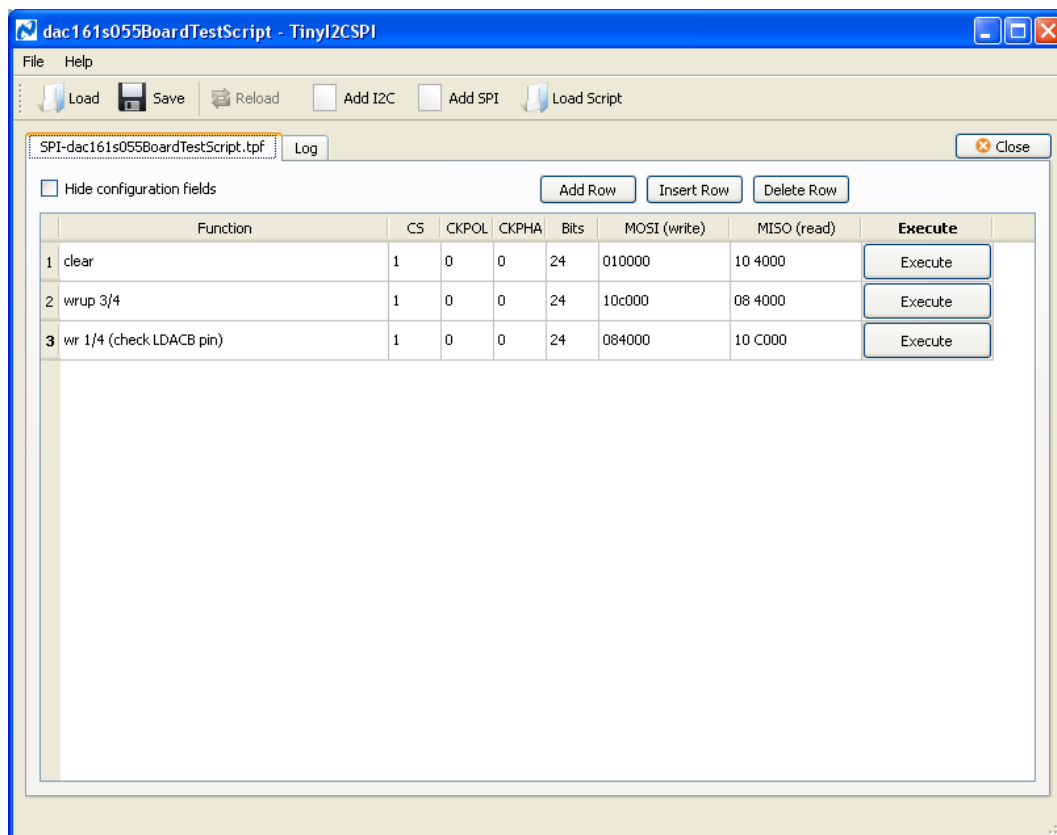


Figure 3: Example commands in TinyI2CSPI interface

## 4. Functional Description

### 4.1 DAC Reference Circuitry

This evaluation board includes two options to source the voltage reference, VREF. The options are selecting the fixed, on board +4.096V voltage reference (LM4120-4.1) to source VREF or using the external banana jack to source VREF. To select the +4.1V reference, short pins 2 & 3 of J1. To select the external reference, short pins 1 & 2 of J1. J1 can be driven by a power supply set between +2.7 V and +5.25 V.

### 4.2 SPI Interface

The DAC161S055 requires three SPI input pins. It has one output pin. The input pins are Serial Clock (SCLK), Chip Select Bar (CSB), and data in or Master Out Slave In (MOSI). The user must provide input signals for SCLK, CSB and MOSI. The user can optionally use the data out or Master In Slave Out (MISO) pin to use the DAC161S055 in a Daisy Chain configuration as described in the data sheet.

#### 4.2.1 Serial Clock (SCLK, CSB, MISO, MOSI)

These signals are provided by the SPUSI2 board in Computer Mode. In Stand Alone Mode, these signals must be provided by the user either on the TEST\_PORT or the GPSI 14/16 header. The signal levels are TTL and CMOS compatible. The voltage expected is set by the value of VDDIO that is applied to the board.

### 4.3 Other I/O

The DAC161S055 requires three other digital I/O pins: LDACB, CLRB and MZB.

#### 4.3.1 Load DAC (LDACB) and Clear (CLRB)


These two signals must be provided by the user. In computer mode, you can set the levels by either leaving the pin on the TEST\_PORT unconnected, in which case it floats high, or by shorting the pin to the ground pin on the header using a jumper. The signal level for CSB is TTL and CMOS compatible. The voltage expected is set by the value of VDDIO that is applied to the board.

#### 4.3.2 Mid Scale or Zero Output (MZB)

The MZB pin must be provide by the user. In computer mode, the level can be set by leaving the pin floating (for a high) or shorting it to ground on the TEST\_PORT header using a jumper. The signal level for MISO is TTL and CMOS compatible. Unlike all the other pins, the voltage expected is set by the value of VA that is applied to the board so that the output is set when the VA supply comes up.

## 5. Hardware Schematic



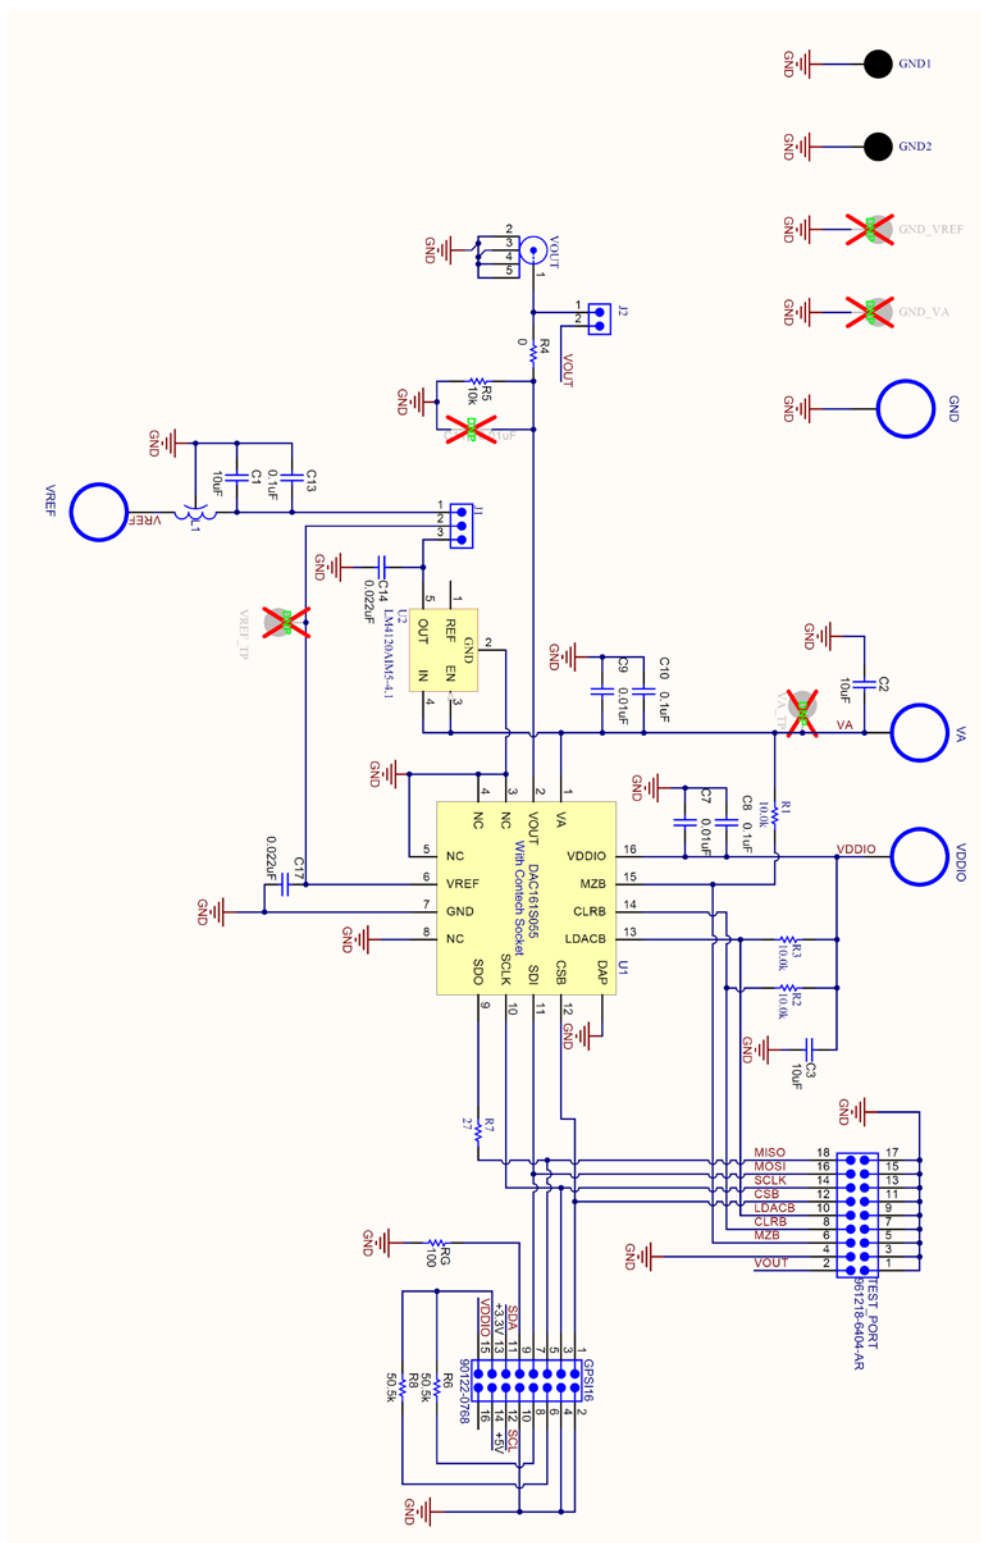



## 6. DAC161S055 Evaluation Board Bill of Materials

Item	Designator	Value	Description	Manufacturer	PartNumber	Quantity
1	AA1		Printed Circuit Board	TBD		1
2	C1, C2, C3	10uF	Ceramic, X5R, 10V, 10%	Kemet	C0805C106K8PACTU	3
3	C7, C9	0.01uF	Ceramic, X7R, 50V, 10%	Kemet	C0805C103K5RACTU	2
4	C8, C10, C13	0.1uF	Ceramic, X7R, 16V, 10%	Kemet	C0603C104K4RACTU	3
5	C14, C17	0.022uF	Ceramic, X7R, 16V, 10%	Kemet	C0603C223K4RACTU	2
6	GND, VA, VDDIO, VREF		Uninsulated Standard .175 Female Banana Jack Panel Mount	Emerson Network Power Connectivity Solutions	108-0740-001	4
7	GND1, GND2	Black	Test Point, TH, Multipurpose, Black	Keystone Electronics	5011	2
8	GPSI16		2x8 CONN HEADER 16POS .100" R/A GOLD	Molex	90122-0768	1
9	J1		CONN 1X3 HEADER 100mil pitch	3M	961103-6404-AR	1
10	J2		CONN 1X2 HEADER 100mil pitch	3M	961102-6404-AR	1
11	L1		FILTER LC HIGH FREQ .2UF 1806	Murata	NFM41PC204F1H3L	1
12	R1, R2, R3	10.0k	1%, 0.125W	Vishay-Dale	CRCW080510K0FKEA	3
13	R4	0	RES, 0 ohm, 5%, 0.125W, 0805	Vishay-Dale	CRCW08050000Z0EA	1
14	R5	10k	RES, 10k ohm, 5%, 0.125W, 0805	Vishay-Dale	CRCW080510K0JNEA	1
15	R6, R8	49.9k	RES, 49.9k ohm, 1%, 0.125W, 0805	Panasonic	ERJ-6ENF4992V	2
16	R7	27	5%, 0.1W	Vishay-Dale	CRCW060327R0JNEA	1
17	RG	100	RES, 100 ohm, 5%, 0.125W, 0805	Panasonic	ERJ-6GEYJ101V	1
18	TEST_PORT		2x9 CONN HEADER 18POS .100"	3M	961218-6404-AR	1
19	U1		Precision 16-bit, Low Glitch, Buffered Voltage-Output DAC	National Semiconductor	DAC161S055	1
20	U2		Precision Micropower Low Dropout Voltage Reference	National Semiconductor	LM4120AIM5-4.1	1
21	VOUT		Connector, TH, 75 Ohm BNC	Amphenol Connex	31-5329-72RFX	1

## **Notes**

BY USING THIS PRODUCT, YOU ARE AGREEING TO BE BOUND BY THE TERMS AND CONDITIONS OF NATIONAL SEMICONDUCTOR'S END USER LICENSE AGREEMENT. DO NOT USE THIS PRODUCT UNTIL YOU HAVE READ AND AGREED TO THE TERMS AND CONDITIONS OF THAT AGREEMENT. IF YOU DO NOT AGREE WITH THEM, CONTACT THE VENDOR WITHIN TEN (10) DAYS OF RECEIPT FOR INSTRUCTIONS ON RETURN OF THE UNUSED PRODUCT FOR A REFUND OF THE PURCHASE PRICE PAID, IF ANY.

The DAC161S055 Evaluation Board is intended for product evaluation purposes only and is not intended for resale to end consumers, is not authorized for such use and is not designed for compliance with European EMC Directive 89/336/EEC, or for compliance with any other electromagnetic compatibility requirements.

National Semiconductor Corporation does not assume any responsibility for use of any circuitry or software supplied or described. No circuit patent licenses are implied.

#### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

<b>National Semiconductor Corporation Americas</b> Tel: 1-800-272-9959 Fax: 1-800-737-7018 Email: support@nsc.com	<b>National Semiconductor Europe</b> Fax: +49 (0) 1 80-530 85 86 Email: europe.support@nsc.com Deutsch Tel: +49 (0) 699508 6208 English Tel: +49 (0) 870 24 0 2171 French Tel: +49 (0) 141 91 8790	<b>National Semiconductor Asia Pacific Customer Response Group</b> Tel: 65-2544466 Fax: 65-2504466 Email: sea.support@nsc.com	<b>National Semiconductor Japan Ltd.</b> Tel: 81-3-5639-7560 Fax: 81-3-5639-7507
<b>www.national.com</b>			

National does not assume any responsibility for any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specification.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com