


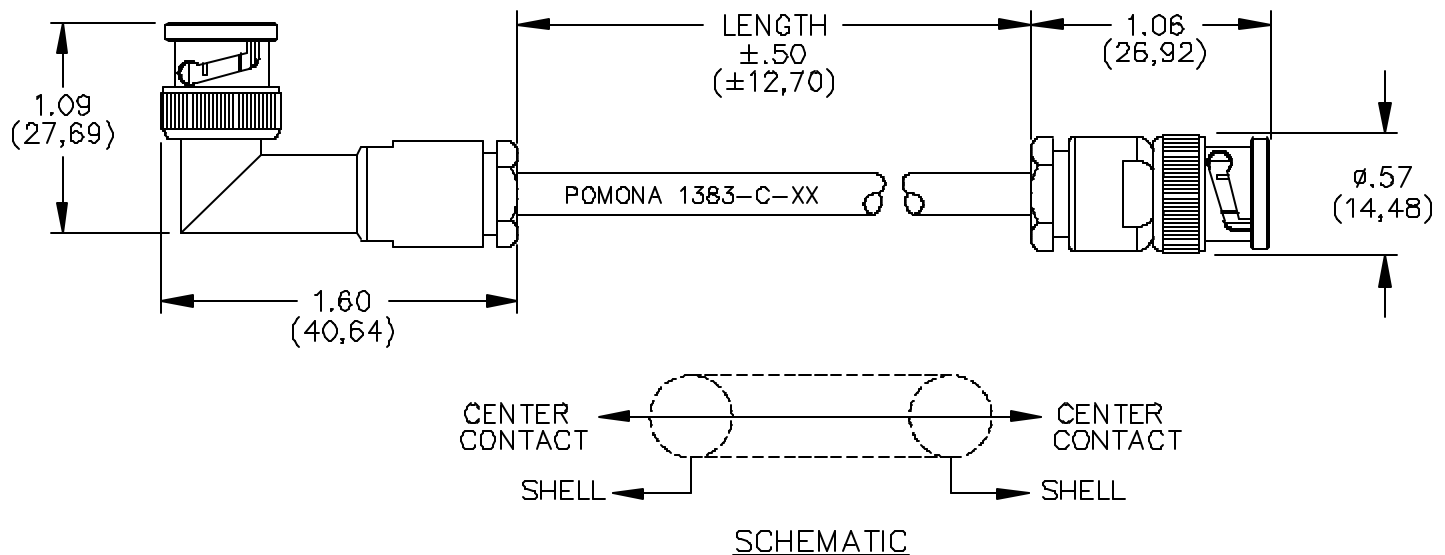

FEATURES:

- Right Angle BNC Provided for Easy Access
- Lengths other than those specified are available upon request.

MATERIALS:

Conn: 1st End – Right Angle BNC Male.

Body and Fittings: Tarnish Resistant.

Center Contact: Gold Plated per MIL-C-39012.

Cable: RG58C/U. (.195) O.D.

50 Ohms Impedence

Marking: "POMONA 1383-C-XX".

Conn: 2nd End-BNC Male.

Body Fittings: Non-tarnish finish.

Center Contact: Gold Plated per MIL-C-39012.

RATINGS: Entire Assembly

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: Shield-Earth: 30VAC/60VDC Max.

Inner conductor-Shield: 500 VRMS Max.

ORDERING INFORMATION: Model 1383-C-XX

XX=Cable Length, Standard Lengths: 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1524)

Ordering Example: 1383-C-60 indicates 60" (1524)

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com