

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: LCP
 COLOR: BLACK
 SHIELDING: BRASS NI PLATED
 CONTACT: COPPER ALLOY
 CONTACT TYPE: STAMPED
 LEVEL: 3 AS PER CECC 75 301-802



ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 TO 85°C
 FLAMABILITY RAING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 40V DC
 INSULATOR RESISTANCE: UNMATED = 100 MOHM,
 MATED = 10 MOHM
 DIELECTRIC WITHSTANDING: UNMATED = 500VAC,
 MATED = 300VAC
 CONTACT RESISTANCE: 30 mOHM MAX
 SHELL: 50 mOHM MAX

SOLDERING: REFLOW PROCESS ONLY

PACKAGING
 TAPE & REEL

RECOMMENDED P.C.B PATTERN LAYOUT
 T=1.6±0.15

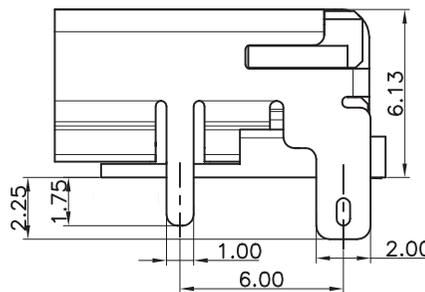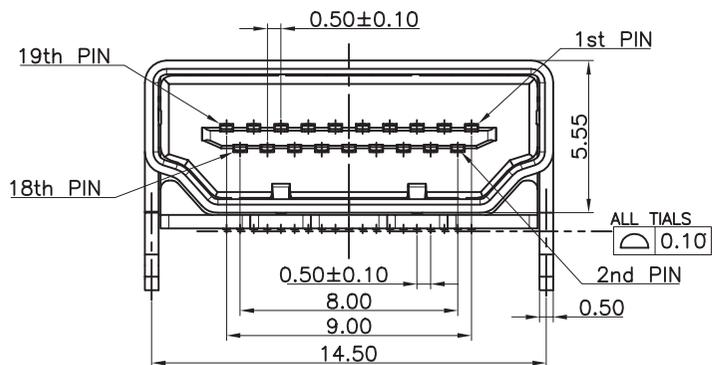

RoHS Compliant			
G			
F			
E			
D			
C	07-MAY-17	SHLD & CTC	QL
B	05-OCT-07	INSET INFO.	CH
A	11-OCT-06	PDF	JP
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: ANGLED SMT HDMI

SCALE:

WERI PART NO: 685119134923

SHEET: 1/1

DRAW: SEAMAN

SIZE

A4

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com