



# 0.4 mm Pitch, 1.5 to 4.0 mm Height, Board-to-Board and Board-to-FPC Connectors

## DF40 Series

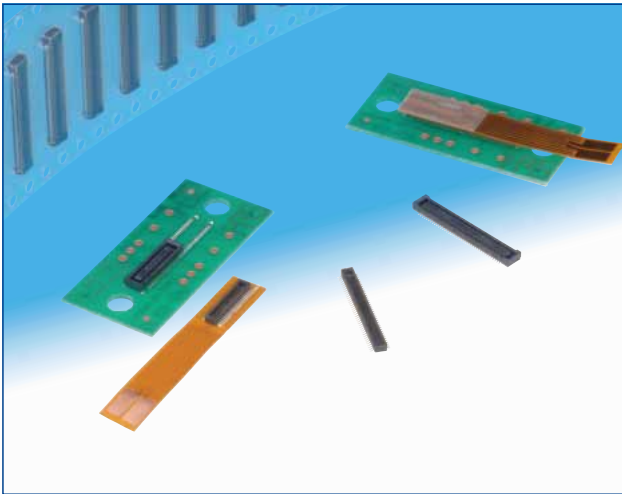

### Space saving

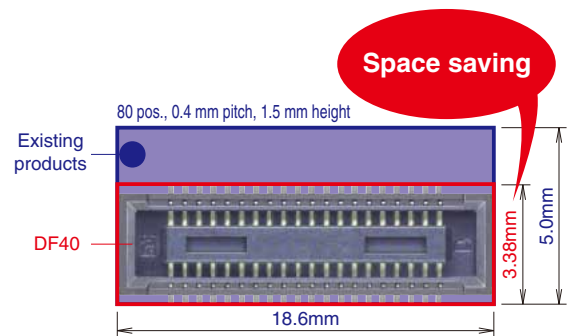

## ■Features

### 1. High density mounting

Space saving design that has a minimum connector width, yet still retains a sufficient vacuum area for easy pick-and-place mounting  
Minimum width: 3.38 mm

### 2. Multiple stack height options

In addition to its space saving design, several stack heights are available and add versatility to any application. Stack heights: 1.5 mm, 2.0 mm, 2.5 mm, 3.0 mm, 3.5 mm, and 4.0 mm.

### 3. High contact reliability

Despite its small stature and low profile, the contacts deliver strong contact forces and an effective mating length of 0.45 mm on the 1.5 mm stacking height. This connector utilizes a locking system that prevents accidental unmating issues and emits a clear tactile click to ensure that mating has been completed.

### 4. Excellent self-aligning range

The use of guide ribs allows 0.33 mm of self-alignment on this connector.

### 5. Reinforced structure with shock absorbing ribs

Both sides of the connector have been reinforced with the addition of shock absorbing ribs.

### 6. Solder wicking prevention

Nickel-plated barriers were added to protect the contact areas from potential solder wicking.

### 7. Contamination resistant design

When mated, the connector's design covers the contacts which help to keep dust and other debris away from the contacts. The SMT leads are kept very close to the connector housing which also helps to prevent shorts caused by debris on the exposed contacts


### 8. RoHS compliant

Environment friendly and does not use RoHS specified prohibited materials.  
All materials and substances used to produce these parts comply with the RoHS standards.

### 9. High speed signal with noise prevention

The shielded type can support high speed signal transmissions with noise prevention.

### High contact reliability - effective mating length 0.45 mm

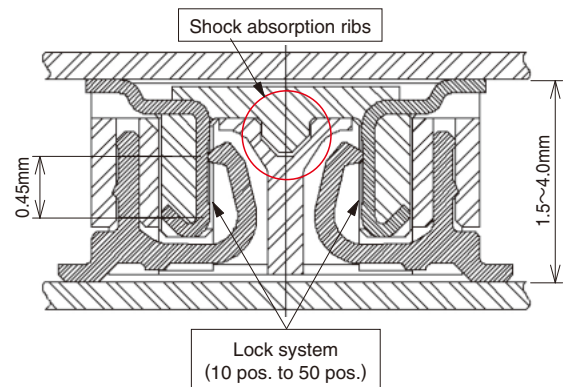

### Stacking height variations

#### Standard type

| Stacking height | 1.5 mm | 2.0 mm | 2.5 mm | 3.0 mm | 3.5 mm | 4.0 mm |
|-----------------|--------|--------|--------|--------|--------|--------|
| 10              | ○      | —      | ○      | —      | —      | —      |
| 12              | △      | ○      | —      | —      | —      | —      |
| 20              | ○      | ○      | ○      | —      | ○      | —      |
| 24              | ○      | ○      | —      | —      | —      | —      |
| 30              | ○      | ○      | ○      | ○      | ○      | —      |
| 34              | ○      | —      | —      | —      | —      | —      |
| 40              | ○      | ○      | ○      | —      | ○      | ○      |
| 44              | —      | ○      | —      | ○      | —      | —      |
| 50              | ○      | ○      | ○      | ○      | ○      | ○      |
| 60              | ○      | ○      | ○      | ○      | ○      | ○      |
| 70              | ○      | ○      | —      | ○      | —      | —      |
| 80              | ○      | ○      | —      | ○      | ○      | ○      |
| 90              | ○      | —      | —      | ○      | —      | ○      |
| 100             | ○      | —      | —      | ○      | —      | —      |

△ : Products under development

#### Shielded type

| Stacking height | 1.5 mm | 3.0 mm |
|-----------------|--------|--------|
| 30              | ○      | —      |
| 48              | ○      | ○      |
| 70              | —      | ○      |

## Product Specifications

|         |                                               |                                                                                            |                                                                                                 |
|---------|-----------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Ratings | Rated Current 0.3A<br>Rated Voltage AC,DC 30V | Operating Temperature Range<br>-35 ~ 85°C (Note 1)<br>Operating Humidity Range<br>20 ~ 80% | Storage Temperature Range<br>-10 ~ 60°C (Note 2)<br>Storage Humidity Range<br>40 ~ 70% (Note 2) |
|---------|-----------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|

| Items                        | Specifications                                                                | Conditions                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| 1. Insulation Resistance     | Minimum of 50 MΩ                                                              | Measured with DC 100 V                                                                                                             |
| 2. Withstanding Voltage      | No flashover or breakdown                                                     | Apply AC 100 V for 1 minute                                                                                                        |
| 3. Contact Resistance        | Maximum of 90 mΩ                                                              | Measured with AC 20 mV, 1 kHz and 1 mA                                                                                             |
| 4. Vibration Resistance      | No electrical discontinuity of 1μs or greater                                 | Frequency 10-55 Hz, half amplitude 0.75 mm, 3 directions for 2 hours                                                               |
| 5. Humidity Resistance       | Contact resistance Maximum of 90 mΩ<br>Insulation resistance Minimum of 25 mΩ | Left at temperature 40 ± 2°C, humidity 90 to 95%, 96 hours                                                                         |
| 6. Temperature Cycles        | Contact resistance Maximum of 90 mΩ<br>Insulation resistance Minimum of 50 mΩ | (-55°C: 30 minutes → 5~35°C: 10 minutes → 85°C: 30 minutes → 5~35°C: 10 minutes) 5 cycles                                          |
| 7. Durability                | Contact Resistance: Maximum of 90 mΩ                                          | 30 mating cycles                                                                                                                   |
| 8. Soldering Heat Resistance | Should be no melting of resin parts that affects its performance              | Reflow: according to the Recommended Temperature Profile<br>Hand solder: Soldering iron temperature 350°C, no more than 3 seconds. |

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" here refers to products stored for a long period prior to board mounting and use. The operating temperature and humidity range covers the non-energized condition of connectors after board mounting and the temporary storage conditions during transportation, etc.

## Materials (Standard, non shielded type)

| Product    | Component | Materials       | Finish       | UL Regulation |
|------------|-----------|-----------------|--------------|---------------|
| Receptacle | Insulator | LCP             | Black        | UL94V-0       |
|            | Contact   | Phosphor bronze | Gold plating | ————          |
| Header     | Insulator | LCP             | Black        | UL94V-0       |
|            | Contact   | Phosphor bronze | Gold plating | ————          |

## Materials (Shielded type)

| Product    | Component                 | Materials       | Finish       | UL Regulation |
|------------|---------------------------|-----------------|--------------|---------------|
| Receptacle | Insulator                 | LCP             | Black        | UL94V-0       |
|            | Contact                   | Phosphor bronze | Gold plating | ————          |
|            | Shield plate              | Phosphor bronze | Gold plating | ————          |
| Header     | Insulator                 | LCP             | Black        | UL94V-0       |
|            | Contact                   | Phosphor bronze | Gold plating | ————          |
|            | Reinforcing metal fitting | Phosphor bronze | Gold plating | ————          |

## ■Product Number Structure (Standard, non-shielded type)

Refer to this page when determining product specifications by model types. Please place orders with part numbers listed in this catalog. The characteristics and specifications of the product described in this catalog are reference values. Please make sure to check the latest delivery specifications at the time of product use.

### ●Receptacle

**DF40** **#** **-** **(\*\*)** **-** **\*** **DS** **-** **0.4** **V** **(\*\*)**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

| ① Series Name: DF40                                                                                                                           | ③ Stacking height <table><tr><th>Display</th><th>Stacking height</th></tr><tr><td>None</td><td>1.5mm</td></tr><tr><td>2.0</td><td>2.0mm</td></tr><tr><td>2.5</td><td>2.5mm</td></tr><tr><td>3.0</td><td>3.0mm</td></tr><tr><td>3.5</td><td>3.5mm</td></tr><tr><td>4.0</td><td>4.0mm</td></tr></table> | Display         | Stacking height | None | 1.5mm | 2.0 | 2.0mm | 2.5 | 2.5mm | 3.0 | 3.0mm | 3.5 | 3.5mm | 4.0 | 4.0mm | ④ No. of Contacts |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-------------------|
| Display                                                                                                                                       |                                                                                                                                                                                                                                                                                                       | Stacking height |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| None                                                                                                                                          |                                                                                                                                                                                                                                                                                                       | 1.5mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| 2.0                                                                                                                                           |                                                                                                                                                                                                                                                                                                       | 2.0mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| 2.5                                                                                                                                           |                                                                                                                                                                                                                                                                                                       | 2.5mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| 3.0                                                                                                                                           |                                                                                                                                                                                                                                                                                                       | 3.0mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| 3.5                                                                                                                                           |                                                                                                                                                                                                                                                                                                       | 3.5mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| 4.0                                                                                                                                           |                                                                                                                                                                                                                                                                                                       | 4.0mm           |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
| ② Style<br>C: Without reinforcing metal fitting<br>HC: Without reinforcing metal fitting<br>(The H denotes a stacking height 2.5 mm or above) | ⑤ Connector Type<br>DS: Double row receptacle                                                                                                                                                                                                                                                         |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               | ⑥ Contact Pitch:0.4mm                                                                                                                                                                                                                                                                                 |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               | ⑦ Mating direction Shape V: Vertical SMT                                                                                                                                                                                                                                                              |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               | ⑧ Packaging Type<br>(51) Embossed tape packaging                                                                                                                                                                                                                                                      |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               |                                                                                                                                                                                                                                                                                                       |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               |                                                                                                                                                                                                                                                                                                       |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |
|                                                                                                                                               |                                                                                                                                                                                                                                                                                                       |                 |                 |      |       |     |       |     |       |     |       |     |       |     |       |                   |

### ●Header

**DF40** **#** **-** **\*** **DP** **-** **0.4** **V** **(\*\*)**

① ② ③ ④ ⑤ ⑥ ⑦

|                                                 |                                               |                                                  |
|-------------------------------------------------|-----------------------------------------------|--------------------------------------------------|
| ① Series Name: DF40                             | ③ No. of Contacts                             | ⑤ Contact Pitch: 0.4 mm                          |
| ② Style<br>C: Without reinforcing metal fitting | ④ Connector Type<br>DP: Double row pin header | ⑥ Mating direction V: Vertical SMT               |
|                                                 |                                               | ⑦ Packaging Type<br>(51) Embossed tape packaging |

## ■Product Number Structure ( Shielded type)

Refer to this page when determining product specifications by model types. Please place orders with part numbers listed in this catalog. The characteristics and specifications of the product described in this catalog are reference values. Please make sure to check the latest delivery specifications at the time of product use.

### ●Receptacle

**DF40** **GB** **-** **(\*\*)** **-** **\*** **DS** **-** **0.4** **V** **(\*\*)**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

| ① Series Name: DF40        | <div>③ Stacking height</div> <table><tr><th>Display</th><th>Stacking height</th></tr><tr><td>1.5</td><td>1.5mm</td></tr><tr><td>3.0</td><td>3.0mm</td></tr></table> | Display                                          | Stacking height | 1.5 | 1.5mm | 3.0 | 3.0mm | ⑤ Connector Type<br>DS: Double row receptacle |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-----------------|-----|-------|-----|-------|-----------------------------------------------|
| Display                    |                                                                                                                                                                     | Stacking height                                  |                 |     |       |     |       |                                               |
| 1.5                        |                                                                                                                                                                     | 1.5mm                                            |                 |     |       |     |       |                                               |
| 3.0                        |                                                                                                                                                                     | 3.0mm                                            |                 |     |       |     |       |                                               |
| ② Style<br>GB: With shield | ⑥ Contact Pitch: 0.4 mm                                                                                                                                             |                                                  |                 |     |       |     |       |                                               |
|                            | ⑦ Mating direction V: Vertical SMT                                                                                                                                  |                                                  |                 |     |       |     |       |                                               |
|                            | ④ No. of Contacts                                                                                                                                                   |                                                  |                 |     |       |     |       |                                               |
|                            |                                                                                                                                                                     | ⑧ Packaging Type<br>(51) Embossed tape packaging |                 |     |       |     |       |                                               |



### ●Header

**DF40** **GB** **-** **\*** **DP** **-** **0.4** **V** **(\*\*)**


① ② ③ ④ ⑤ ⑥ ⑦

|                                                                                   |                                               |                                                  |
|-----------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------|
| ① Series Name: DF40                                                               | ③ No. of Contacts                             | ⑤ Contact Pitch: 0.4 mm                          |
| ② Style<br>GB: With reinforcing metal fitting<br>(For use with shielded product ) | ④ Connector Type<br>DP: Double row pin header | ⑥ Mating direction V: Vertical SMT               |
|                                                                                   |                                               | ⑦ Packaging Type<br>(51) Embossed tape packaging |

## ■Receptacle (Stacking height 1.5 mm)

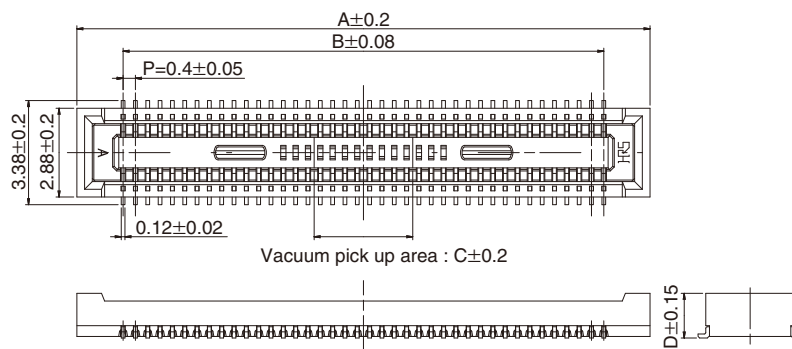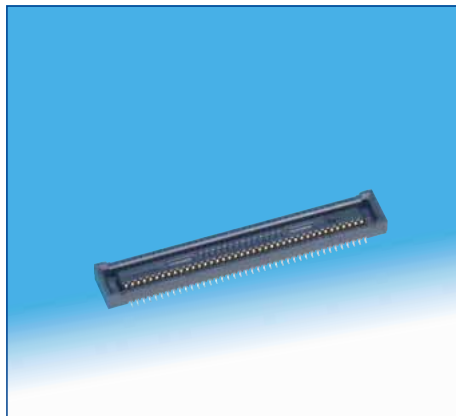

## ◆Recommended PCB layout

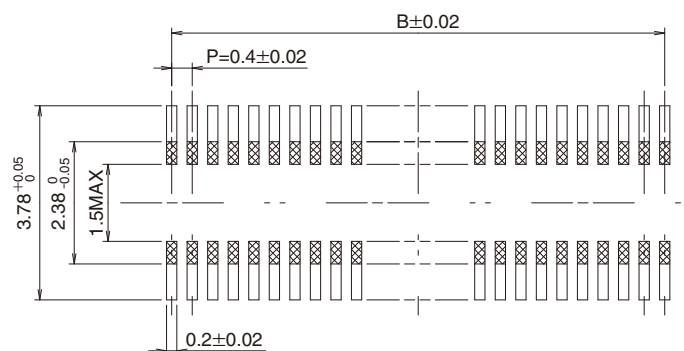

## ■Stacking height 1.5 mm

【Specification No.】

(51): Embossed package 5,000 pieces per reel

Unit: mm

| Part No.             | HRS No.           | No. of Contacts | A    | B    | C   | D    | RoHS |
|----------------------|-------------------|-----------------|------|------|-----|------|------|
| DF40C-10DS-0.4V(51)  | CL684-4036-2-51   | 10              | 4.6  | 1.6  | 1.0 | 1.45 | ○    |
| DF40C-12DS-0.4V(51)  | Under development | 12              | 5.0  | 2.0  | 1.0 | 1.45 |      |
| DF40C-20DS-0.4V(51)  | CL684-4005-9-51   | 20              | 6.6  | 3.6  | 1.0 | 1.45 |      |
| DF40C-24DS-0.4V(51)  | CL684-4006-1-51   | 24              | 7.4  | 4.4  | 1.2 | 1.45 |      |
| DF40C-30DS-0.4V(51)  | CL684-4007-4-51   | 30              | 8.6  | 5.6  | 1.5 | 1.45 |      |
| DF40C-34DS-0.4V(51)  | CL684-4023-0-51   | 34              | 9.4  | 6.4  | 2.3 | 1.45 |      |
| DF40C-40DS-0.4V(51)  | CL684-4008-7-51   | 40              | 10.6 | 7.6  | 3.2 | 1.45 |      |
| DF40C-50DS-0.4V(51)  | CL684-4009-0-51   | 50              | 12.6 | 9.6  | 3.2 | 1.45 |      |
| DF40C-60DS-0.4V(51)  | CL684-4004-6-51   | 60              | 14.6 | 11.6 | 3.2 | 1.45 |      |
| DF40C-70DS-0.4V(51)  | CL684-4016-5-51   | 70              | 16.6 | 13.6 | 3.2 | 1.45 |      |
| DF40C-80DS-0.4V(51)  | CL684-4002-0-51   | 80              | 18.6 | 15.6 | 3.2 | 1.45 |      |
| DF40C-90DS-0.4V(51)  | CL684-4124-8-51   | 90              | 20.6 | 17.6 | 3.2 | 1.45 |      |
| DF40C-100DS-0.4V(51) | CL684-4033-4-51   | 100             | 22.6 | 19.6 | 3.2 | 1.45 |      |

(Note 1) Please place orders by full reel quantities.


(Note 2) The surface of the 60-100 pos. parts have a small, concave section that will not affect the vacuum pick up operation.

(Note 3)  PCB layout prohibited area.


(Note 4) This connector is NOT polarized

(Note 5) Some parts are available with metal fittings. Please contact a Hirose sales representative for more information.

## ■Receptacle (Stacking height 2.0 mm)

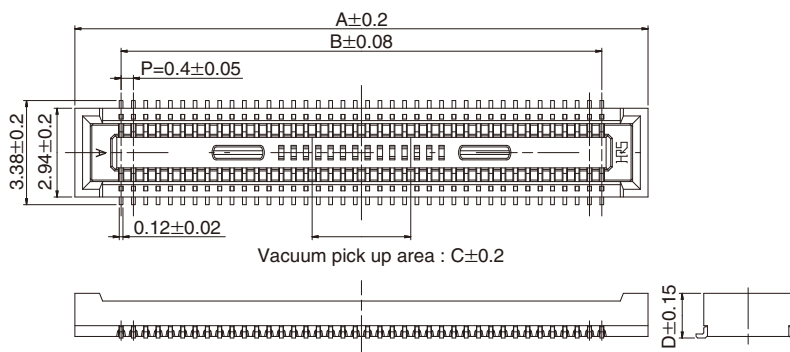

## ◆Recommended PCB layout

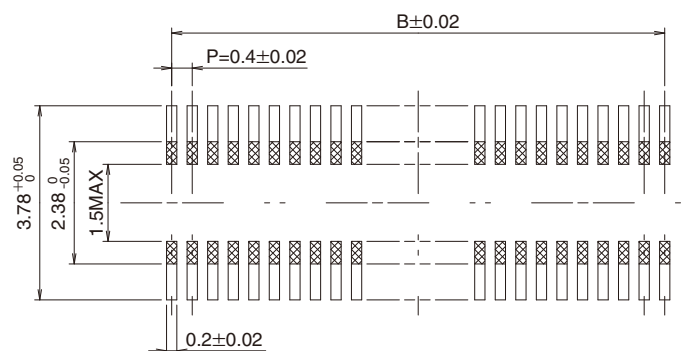

## ■Stacking height 2.0 mm

【Specification No.】

(51): Embossed package 4,000 pieces per reel

Unit: mm

| Part No.                 | HRS No.         | No. of Contacts | A    | B    | C   | D    | RoHS |
|--------------------------|-----------------|-----------------|------|------|-----|------|------|
| DF40C(2.0)-12DS-0.4V(51) | CL684-4148-6-51 | 12              | 5.0  | 2.0  | 1.0 | 1.95 | ○    |
| DF40C(2.0)-20DS-0.4V(51) | CL684-4040-0-51 | 20              | 6.6  | 3.6  | 1.0 | 1.95 |      |
| DF40C(2.0)-24DS-0.4V(51) | CL684-4021-2-51 | 24              | 7.4  | 4.4  | 1.2 | 1.95 |      |
| DF40C(2.0)-30DS-0.4V(51) | CL684-4058-5-51 | 30              | 8.6  | 5.6  | 1.5 | 1.95 |      |
| DF40C(2.0)-40DS-0.4V(51) | CL684-4042-5-51 | 40              | 10.6 | 7.6  | 3.2 | 1.95 |      |
| DF40C(2.0)-50DS-0.4V(51) | CL684-4091-0-51 | 50              | 12.6 | 9.6  | 3.2 | 1.95 |      |
| DF40C(2.0)-60DS-0.4V(51) | CL684-4034-7-51 | 60              | 14.6 | 11.6 | 3.2 | 1.95 |      |
| DF40C(2.0)-70DS-0.4V(51) | CL684-4147-3-51 | 70              | 16.6 | 13.6 | 3.2 | 1.95 |      |
| DF40C(2.0)-80DS-0.4V(51) | CL684-4132-6-51 | 80              | 18.6 | 15.6 | 3.2 | 1.95 |      |

(Note 1) Please place orders by full reel


(Note 2) The surface of the 60-100 pos. parts have a small, concave section that will not affect the vacuum pick up operation.

(Note 3)  PCB layout prohibited area.


(Note 4) This connector is NOT polarized

(Note 5) Some parts are available with metal fittings. Please contact a Hirose sales representative for more information.

## ■Receptacle (Stacking height 2.5 mm to 4.0 mm)

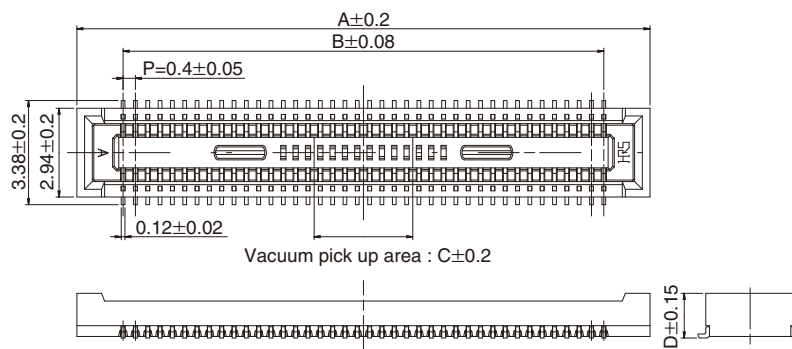

## ◆Recommended PCB layout

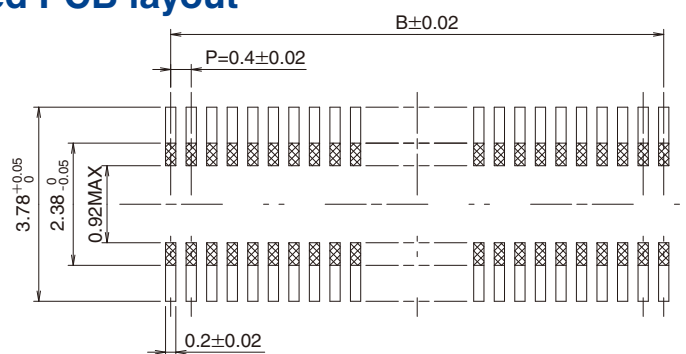

## ■Stacking height 2.5 mm

【Specification No.】

(51): Embossed package 3,000 pieces per reel

Unit: mm

| Part No.                  | HRS No.           | No. of Contacts | A    | B    | C   | D   | RoHS |
|---------------------------|-------------------|-----------------|------|------|-----|-----|------|
| DF40HC(2.5)-10DS-0.4V(51) | Under development | 10              | 4.6  | 1.6  | 1.0 | 2.4 | ○    |
| DF40HC(2.5)-20DS-0.4V(51) | CL684-4126-3-51   | 20              | 6.6  | 3.6  | 1.0 | 2.4 |      |
| DF40HC(2.5)-40DS-0.4V(51) | CL684-4112-9-51   | 40              | 10.6 | 7.6  | 3.2 | 2.4 |      |
| DF40HC(2.5)-50DS-0.4V(51) | CL684-4101-2-51   | 50              | 12.6 | 9.6  | 3.2 | 2.4 |      |
| DF40HC(2.5)-60DS-0.4V(51) | CL684-4085-8-51   | 60              | 14.6 | 11.6 | 3.2 | 2.4 |      |

## ■Stacking height 3.0 mm

【Specification No.】

(51): Embossed package 3,000 pieces per reel

Unit: mm

| Part No.                   | HRS No.         | No. of Contacts | A    | B    | C   | D   | RoHS |
|----------------------------|-----------------|-----------------|------|------|-----|-----|------|
| DF40HC(3.0)-30DS-0.4V(51)  | CL684-4098-0-51 | 30              | 8.6  | 5.6  | 1.5 | 2.9 | ○    |
| DF40HC(3.0)-44DS-0.4V(51)  | CL684-4076-7-51 | 44              | 11.4 | 8.4  | 3.2 | 2.9 |      |
| DF40HC(3.0)-50DS-0.4V(51)  | CL684-4099-2-51 | 50              | 12.6 | 9.6  | 3.2 | 2.9 |      |
| DF40HC(3.0)-60DS-0.4V(51)  | CL684-4100-0-51 | 60              | 14.6 | 11.6 | 3.2 | 2.9 |      |
| DF40HC(3.0)-70DS-0.4V(51)  | CL684-4138-2-51 | 70              | 16.6 | 13.6 | 3.2 | 2.9 |      |
| DF40HC(3.0)-80DS-0.4V(51)  | CL684-4180-9-51 | 80              | 18.6 | 15.6 | 3.2 | 2.9 |      |
| DF40HC(3.0)-90DS-0.4V(51)  | CL684-4161-4-51 | 90              | 20.6 | 17.6 | 3.2 | 2.9 |      |
| DF40HC(3.0)-100DS-0.4V(51) | CL684-4151-0-51 | 100             | 22.6 | 19.6 | 3.2 | 2.9 |      |

(Note 1) Please place orders by full reel

(Note 2) The surface of the 60-100 pos. parts have a small, concave section that will not affect the vacuum pick up operation

(Note 3)  PCB layout prohibited area.

(Note 4) This connector is NOT polarized.

(Note 5) Some parts are available with metal fittings. Please contact a Hirose sales representative for more information.

## ■ Stacking height 3.5 mm

【Specification No.】

(51): Embossed package 2,000 pieces per reel

Unit: mm

| Part No.                  | HRS No.         | No. of Contacts | A    | B    | C   | D   | RoHS |
|---------------------------|-----------------|-----------------|------|------|-----|-----|------|
| DF40HC(3.5)-20DS-0.4V(51) | CL684-4188-0-51 | 20              | 6.6  | 3.6  | 1.0 | 3.4 | ○    |
| DF40HC(3.5)-30DS-0.4V(51) | CL684-4136-7-51 | 30              | 8.6  | 5.6  | 1.5 | 3.4 |      |
| DF40HC(3.5)-40DS-0.4V(51) | CL684-4209-9-51 | 40              | 10.6 | 7.6  | 3.2 | 3.4 |      |
| DF40HC(3.5)-50DS-0.4V(51) | CL684-4109-4-51 | 50              | 12.6 | 9.6  | 3.2 | 3.4 |      |
| DF40HC(3.5)-60DS-0.4V(51) | CL684-4102-5-51 | 60              | 14.6 | 11.6 | 3.2 | 3.4 |      |
| DF40HC(3.5)-80DS-0.4V(51) | CL684-4162-7-51 | 80              | 18.6 | 15.6 | 3.2 | 3.4 |      |

## ■ Stacking height 4.0 mm

【Specification No.】

(51): Embossed package 2,000 pieces per reel

Unit: mm

| Part No.                  | HRS No.           | No. of Contacts | A    | B    | C   | D   | RoHS |
|---------------------------|-------------------|-----------------|------|------|-----|-----|------|
| DF40HC(4.0)-40DS-0.4V(51) | Under development | 40              | 10.6 | 7.6  | 3.2 | 3.9 | ○    |
| DF40HC(4.0)-50DS-0.4V(51) | Under development | 50              | 12.6 | 9.6  | 3.2 | 3.9 |      |
| DF40HC(4.0)-60DS-0.4V(51) | CL684-4133-9-51   | 60              | 14.6 | 11.6 | 3.2 | 3.9 |      |
| DF40HC(4.0)-80DS-0.4V(51) | CL684-4140-4-51   | 80              | 18.6 | 15.6 | 3.2 | 3.9 |      |
| DF40HC(4.0)-90DS-0.4V(51) | CL684-4165-5-51   | 90              | 20.6 | 17.6 | 3.2 | 3.9 |      |

(Note 1) Please place orders by full reel

(Note 2) The surface of the 60-100 pos. parts have a small, concave section that will not affect the vacuum pick up operation

(Note 3)  PCB layout prohibited area.


(Note 4) This connector is NOT polarized.

(Note 5) Some parts are available with metal fittings. Please contact a Hirose sales representative for more information.


## ■ Receptacle (Stacking height 1.5 mm, with shield)



< 30 contact >

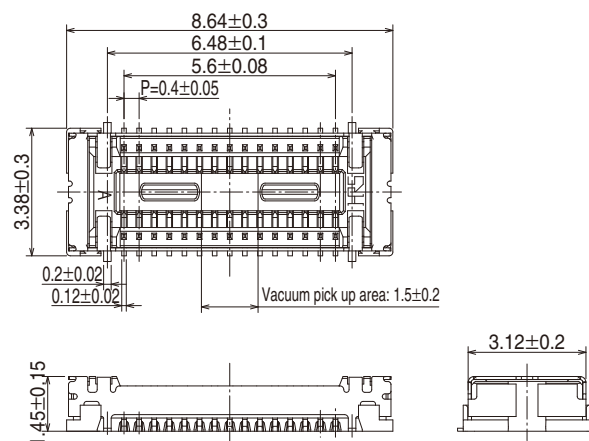


< 48 contact >

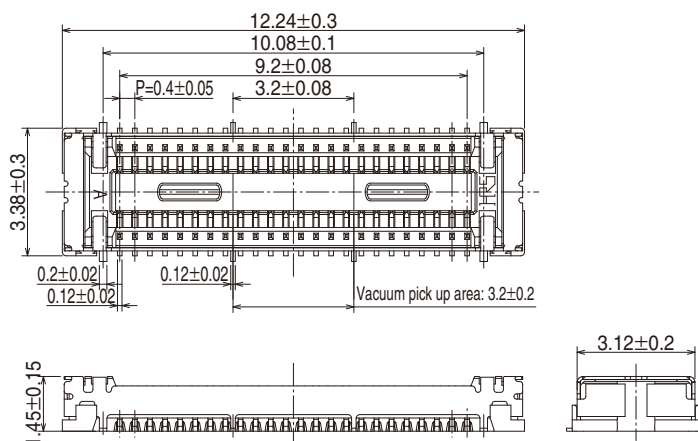


## ◆ Recommended PCB layout

< 30 contact >

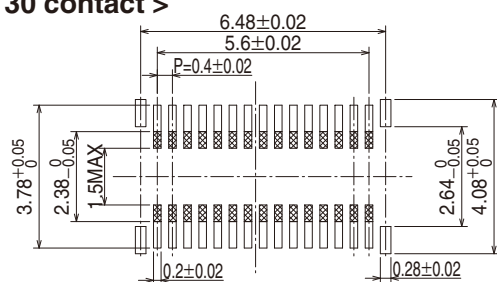

< 48 contact >

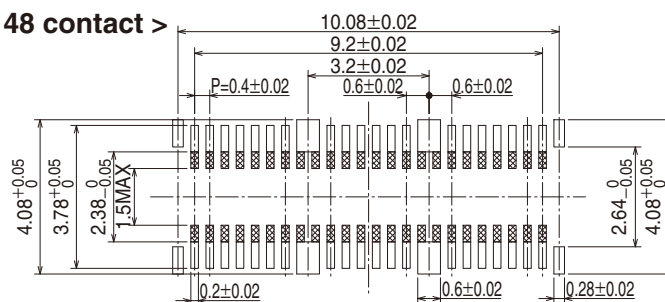

## ■ Stacking height 1.5mm

【Specification No.】

(51): Embossed package 5,000 pieces per reel

Unit: mm

| Part No.                  | HRS No.         | No. of Contacts | Signal contact | Ground contact | RoHS |
|---------------------------|-----------------|-----------------|----------------|----------------|------|
| DF40GB(1.5)-30DS-0.4V(51) | CL684-4198-4-51 | 30              | 30             | 4              | ○    |
| DF40GB(1.5)-48DS-0.4V(51) | CL684-4194-3-51 | 48              | 40             | 12             |      |

(Note 1) Please place orders by full reel


(Note 2)  PCB layout prohibited area.

(Note 3) This connector is NOT polarized


## ■ Receptacle (Stacking height 3.0 mm, with shield)



&lt; 48 contact &gt;

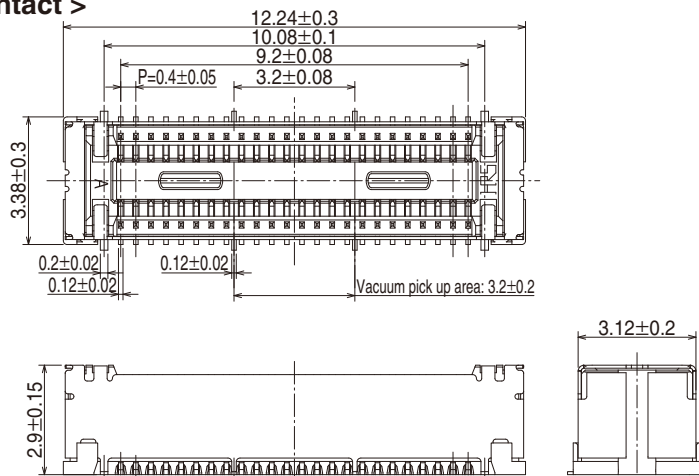


&lt; 70 contact &gt;

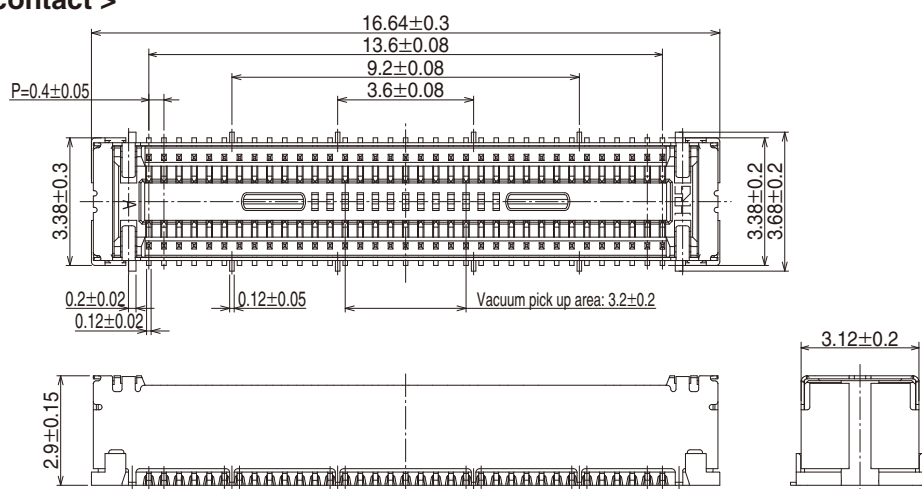


## ◆ Recommended PCB layout

&lt; 48 contact &gt;

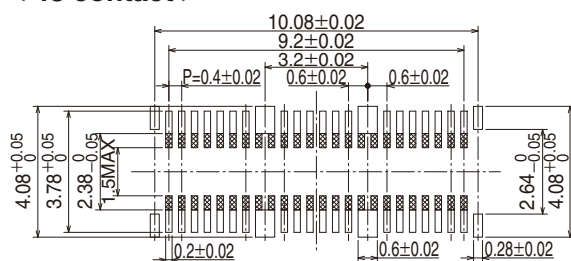

&lt; 70 contact &gt;

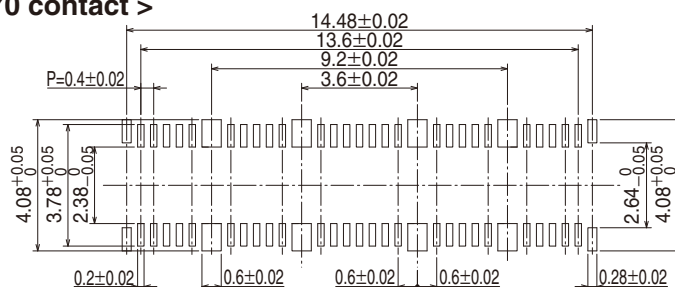

## ■ Stacking height 3.0mm

【Specification No.】

(51): Embossed package 3,000 pieces per reel

Unit: mm



| Part No.                  | HRS No.         | No. of Contacts | Signal contact | Ground contact | RoHS |
|---------------------------|-----------------|-----------------|----------------|----------------|------|
| DF40GB(3.0)-48DS-0.4V(51) | CL684-4197-1-51 | 48              | 40             | 12             | ○    |
| DF40GB(3.0)-70DS-0.4V(51) | CL684-4196-9-51 | 70              | 54             | 20             |      |

(Note 1) Please place orders by full reel


(Note 2) The surface of the 70 pos. part have a small, concave section that will not affect the vacuum pick up operation

(Note 3) This connector is NOT polarized.

## Header

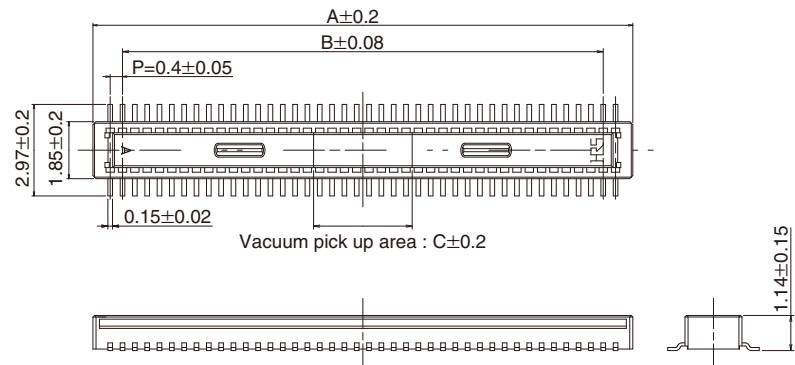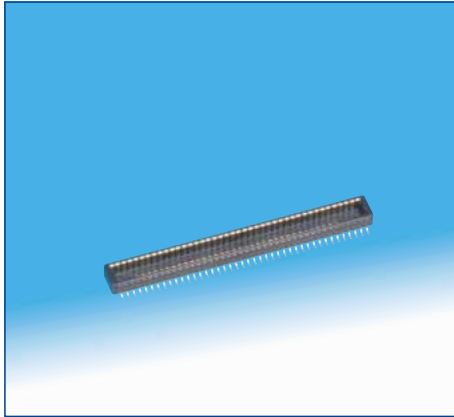

## Recommended PCB layout

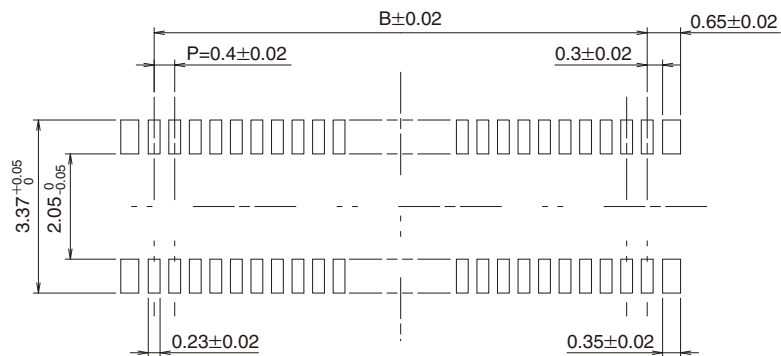

Unit: mm

| Part No.             | HRS No.         | No. of Contacts | A     | B    | C   | RoHS |
|----------------------|-----------------|-----------------|-------|------|-----|------|
| DF40C-10DP-0.4V(51)  | CL684-4035-0-51 | 10              | 3.52  | 1.6  | 1.0 | ○    |
| DF40C-12DP-0.4V(51)  | CL684-4149-9-51 | 12              | 3.92  | 2.0  | 1.0 |      |
| DF40C-20DP-0.4V(51)  | CL684-4010-9-51 | 20              | 5.52  | 3.6  | 1.0 |      |
| DF40C-24DP-0.4V(51)  | CL684-4011-1-51 | 24              | 6.32  | 4.4  | 1.2 |      |
| DF40C-30DP-0.4V(51)  | CL684-4012-4-51 | 30              | 7.52  | 5.6  | 1.5 |      |
| DF40C-34DP-0.4V(51)  | CL684-4024-3-51 | 34              | 8.32  | 6.4  | 2.3 |      |
| DF40C-40DP-0.4V(51)  | CL684-4013-7-51 | 40              | 9.52  | 7.6  | 3.2 |      |
| DF40C-44DP-0.4V(51)  | CL684-4077-0-51 | 44              | 10.32 | 8.4  | 3.2 |      |
| DF40C-50DP-0.4V(51)  | CL684-4014-0-51 | 50              | 11.52 | 9.6  | 3.2 |      |
| DF40C-60DP-0.4V(51)  | CL684-4003-3-51 | 60              | 13.52 | 11.6 | 3.2 |      |
| DF40C-70DP-0.4V(51)  | CL684-4015-2-51 | 70              | 15.52 | 13.6 | 3.2 |      |
| DF40C-80DP-0.4V(51)  | CL684-4001-8-51 | 80              | 17.52 | 15.6 | 3.2 |      |
| DF40C-90DP-0.4V(51)  | CL684-4125-0-51 | 90              | 19.52 | 17.6 | 3.2 |      |
| DF40C-100DP-0.4V(51) | CL684-4032-1-51 | 100             | 21.52 | 19.6 | 3.2 |      |

(Note 1) Please place orders by full reel



(Note 2) There are no concave parts on the header side contact part to increase the mating strength for 60 pos. or above.

(Note 3) Use the contacts at the four corners as metal fittings. Do not use them as signal or power contacts.


(Note 4) The surface of the 90 pos and higher parts have a small, concave section that will not affect the vacuum pick up operation

(Note 5) This connector is NOT polarized.

## Header (For use with shielded product)

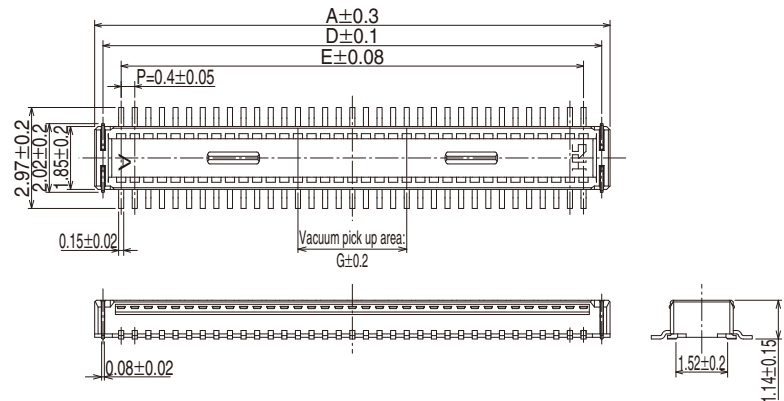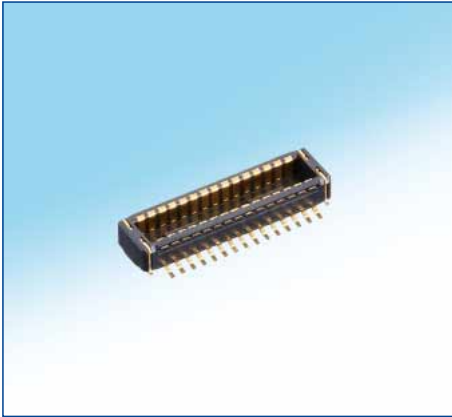

## Recommended PCB layout

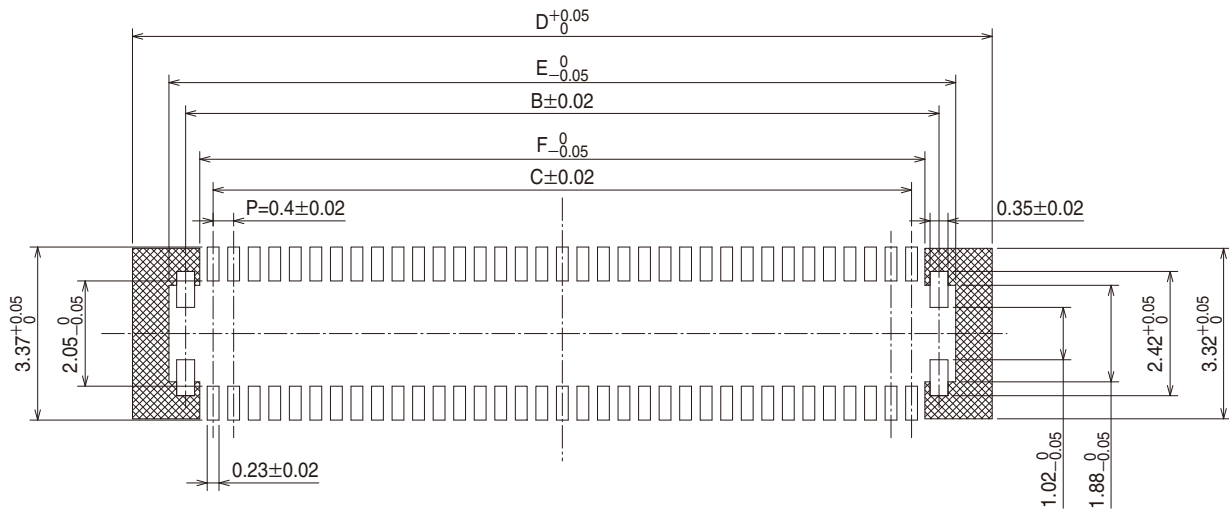

Unit: mm

| Part No.             | HRS No.         | No. of Contacts | A     | B     | C    | D     | E     | F     | G   | RoHS |
|----------------------|-----------------|-----------------|-------|-------|------|-------|-------|-------|-----|------|
| DF40GB-30DP-0.4V(51) | CL684-4200-4-51 | 10              | 7.16  | 6.67  | 5.6  | 8.74  | 7.32  | 6.12  | 1.5 | ○    |
| DF40GB-48DP-0.4V(51) | CL684-4195-6-51 | 12              | 10.76 | 10.27 | 9.2  | 12.34 | 10.92 | 9.72  | 3.2 |      |
| DF40GB-70DP-0.4V(51) | CL684-4199-7-51 | 20              | 15.16 | 14.67 | 13.6 | 16.74 | 15.32 | 14.12 | 3.2 |      |


(Note 1) Please place orders by full reel

(Note 2) There are no concave parts of header side contact part to increase the mating strength for 60 pos. or above.


(Note 3) This connector is NOT polarized.

## ◆ Embossed Carrier Tape Dimensions (JIS C 0806 compliant)

### ● Receptacle (Stacking height 1.5 mm)

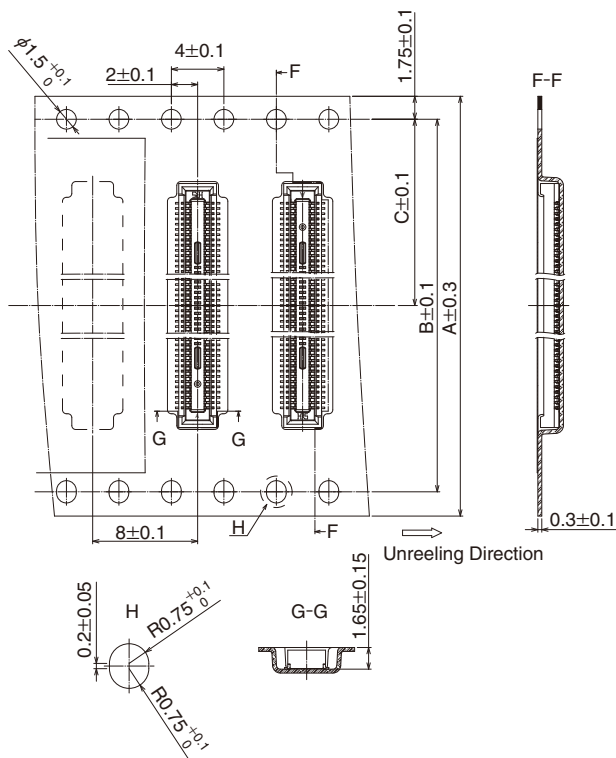

### ● Reel Condition Dimensions

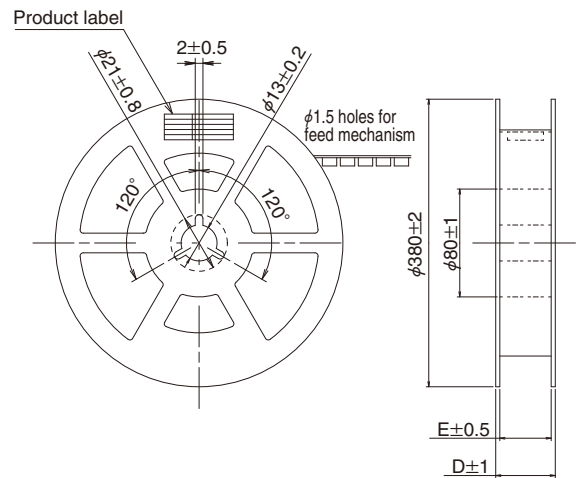

## ■ Stacking height 1.5 mm


Unit: mm

| Part No.                  | A  | B    | C    | D    | E    |
|---------------------------|----|------|------|------|------|
| DF40C-10DS-0.4V(51)       | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-12DS-0.4V(51)       | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-20DS-0.4V(51)       | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-24DS-0.4V(51)       | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-30DS-0.4V(51)       | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-34DS-0.4V(51)       | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-40DS-0.4V(51)       | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-50DS-0.4V(51)       | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-60DS-0.4V(51)       | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-70DS-0.4V(51)       | 32 | 28.4 | 14.2 | 37.5 | 33.5 |
| DF40C-80DS-0.4V(51)       | 32 | 28.4 | 14.2 | 37.5 | 33.5 |
| DF40C-90DS-0.4V(51)       | 44 | 40.4 | 20.2 | 49.5 | 45.5 |
| DF40C-100DS-0.4V(51)      | 44 | 40.4 | 20.2 | 49.5 | 45.5 |
| DF40GB(1.5)-30DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40GB(1.5)-48DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 |

(Note 1) For 10-60 contact position parts, the carrier tape only has one row of holes. The carrier for parts with 70 contacts and above has two rows of holes.

## ◆ Embossed Carrier Tape Dimensions (JIS C 0806 compliant)

● Receptacle (Stacking height 2.0 mm to 2.5 mm) ● Reel Dimensions

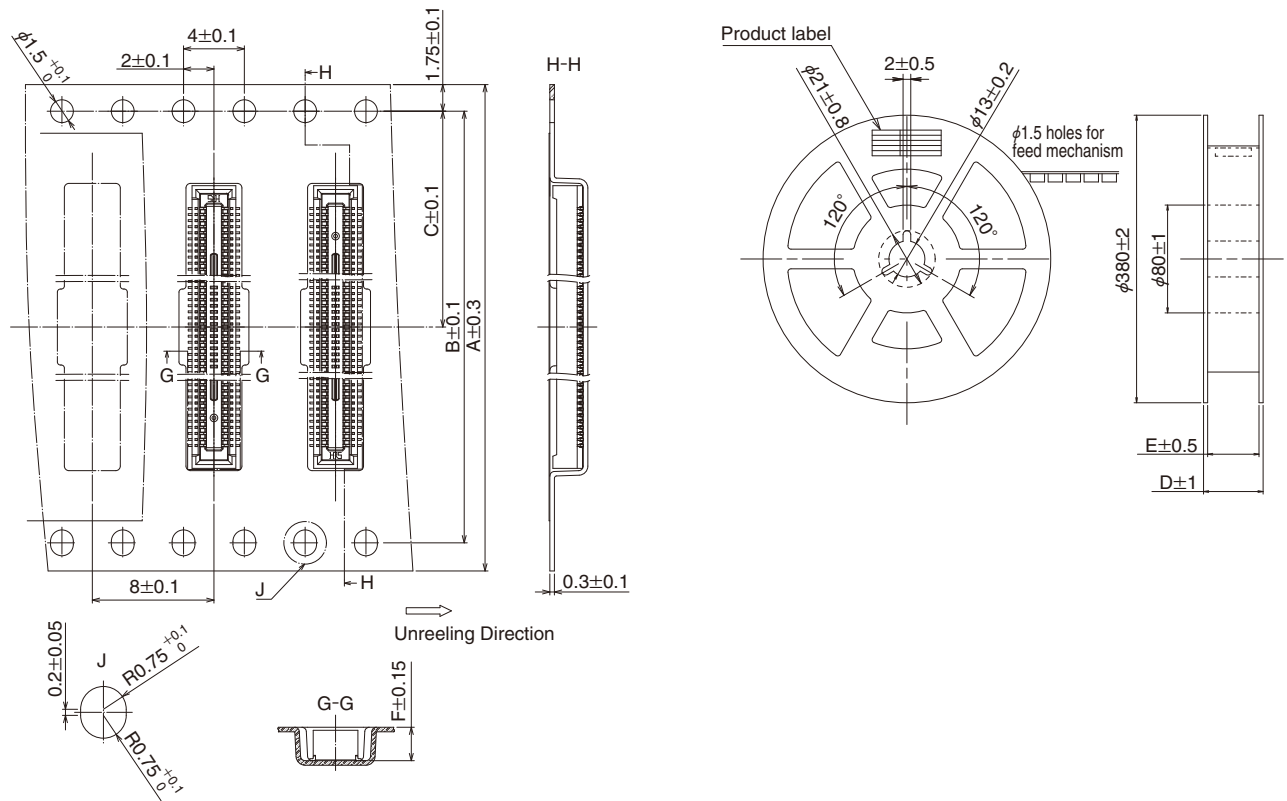

### ■ Stacking height 2.0 mm

Unit: mm

| Part No.                 | A  | B    | C    | D    | E    | F   |
|--------------------------|----|------|------|------|------|-----|
| DF40C(2.0)-12DS-0.4V(51) | 16 | —    | 7.5  | 21.5 | 17.5 | 2.2 |
| DF40C(2.0)-20DS-0.4V(51) | 16 | —    | 7.5  | 21.5 | 17.5 | 2.2 |
| DF40C(2.0)-24DS-0.4V(51) | 16 | —    | 7.5  | 21.5 | 17.5 | 2.2 |
| DF40C(2.0)-30DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 2.2 |
| DF40C(2.0)-40DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 2.2 |
| DF40C(2.0)-50DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 2.2 |
| DF40C(2.0)-60DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 2.2 |
| DF40C(2.0)-70DS-0.4V(51) | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 2.2 |
| DF40C(2.0)-80DS-0.4V(51) | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 2.2 |

### ■ Stacking height 2.5 mm

Unit: mm


| Part No.                  | A  | B | C    | D    | E    | F    |
|---------------------------|----|---|------|------|------|------|
| DF40HC(2.5)-10DS-0.4V(51) | 16 | — | 7.5  | 21.5 | 17.5 | 2.72 |
| DF40HC(2.5)-20DS-0.4V(51) | 16 | — | 7.5  | 21.5 | 17.5 | 2.72 |
| DF40HC(2.5)-40DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 2.72 |
| DF40HC(2.5)-50DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 2.72 |
| DF40HC(2.5)-60DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 2.72 |

(Note 1) For 10-60 contact position parts, the carrier tape only has one row of holes. The carrier for parts with 70 contacts and above has two rows of holes.

## ◆ Embossed Carrier Tape Dimensions (JIS C 0806 compliant)

● Receptacle (Stacking height 3.0 mm to 4.0 mm)

● Reel Condition Dimensions

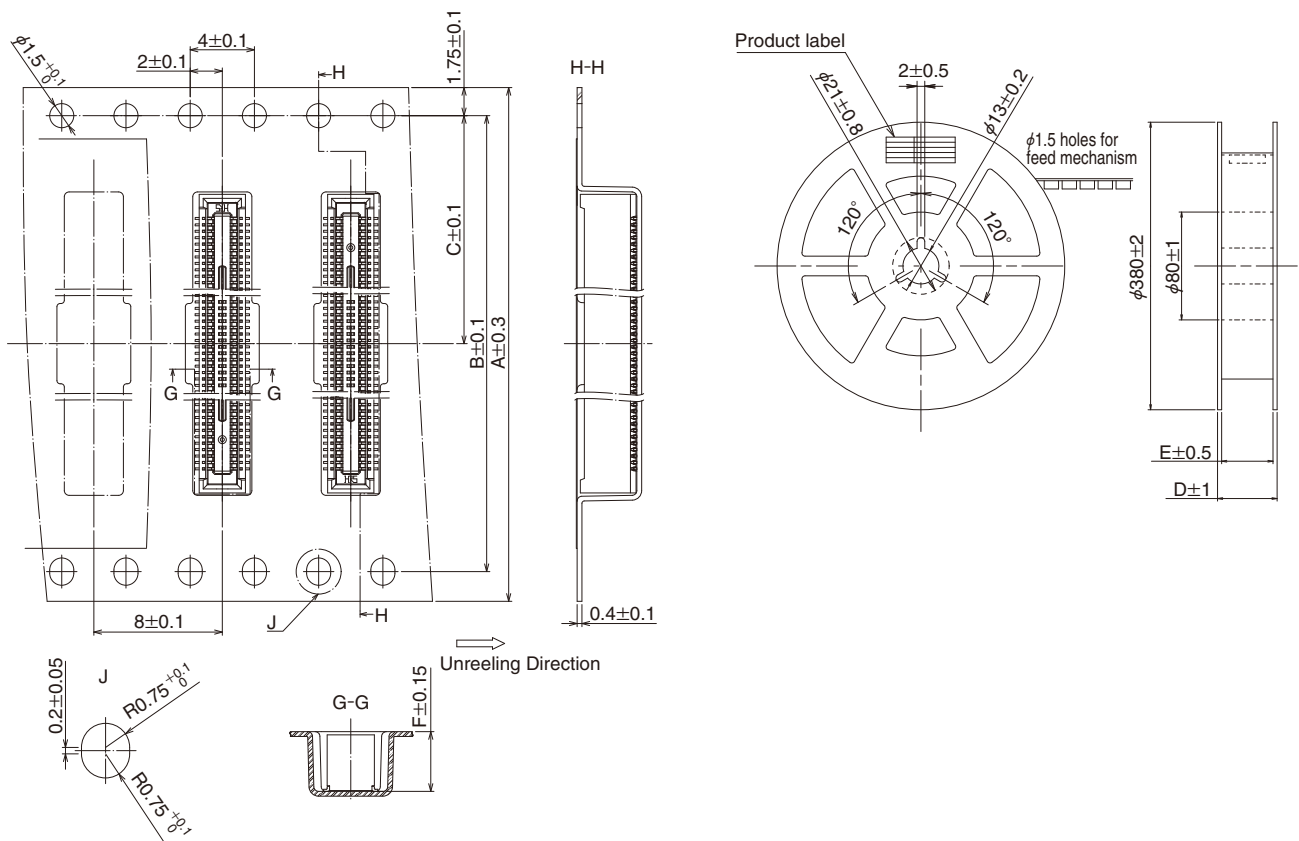

### ■ Stacking height 3.0 mm

Unit: mm

| Part No.                   | A  | B    | C    | D    | E    | F    |
|----------------------------|----|------|------|------|------|------|
| DF40HC(3.0)-30DS-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 | 3.15 |
| DF40HC(3.0)-44DS-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 | 3.15 |
| DF40HC(3.0)-50DS-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 | 3.15 |
| DF40HC(3.0)-60DS-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 | 3.15 |
| DF40HC(3.0)-70DS-0.4V(51)  | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 3.15 |
| DF40HC(3.0)-80DS-0.4V(51)  | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 3.15 |
| DF40HC(3.0)-90DS-0.4V(51)  | 44 | 40.4 | 20.2 | 49.5 | 45.5 | 3.15 |
| DF40HC(3.0)-100DS-0.4V(51) | 44 | 40.4 | 20.2 | 49.5 | 45.5 | 3.15 |
| DF40GB(3.0)-48DS-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 | 3.15 |
| DF40GB(3.0)-70DS-0.4V(51)  | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 3.15 |

### ■ Stacking height 3.5 mm

Unit: mm

| Part No.                  | A  | B | C    | D    | E    | F    |
|---------------------------|----|---|------|------|------|------|
| DF40HC(3.5)-20DS-0.4V(51) | 16 | — | 7.5  | 21.5 | 17.5 | 3.72 |
| DF40HC(3.5)-30DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 3.72 |
| DF40HC(3.5)-50DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 3.72 |
| DF40HC(3.5)-60DS-0.4V(51) | 24 | — | 11.5 | 29.5 | 25.5 | 3.72 |


### ■ Stacking height 4.0 mm

Unit: mm


| Part No.                  | A  | B    | C    | D    | E    | F    |
|---------------------------|----|------|------|------|------|------|
| DF40HC(4.0)-40DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 4.15 |
| DF40HC(4.0)-50DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 4.15 |
| DF40HC(4.0)-60DS-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 | 4.15 |
| DF40HC(4.0)-80DS-0.4V(51) | 32 | 28.4 | 14.2 | 37.5 | 33.5 | 4.15 |
| DF40HC(4.0)-90DS-0.4V(51) | 44 | 40.4 | 20.2 | 49.5 | 45.5 | 4.15 |

(Note 1) For 10-60 contact position parts, the carrier tape only has one row of holes. The carrier for parts with 70 contacts and above has two rows of holes.

## ●Header

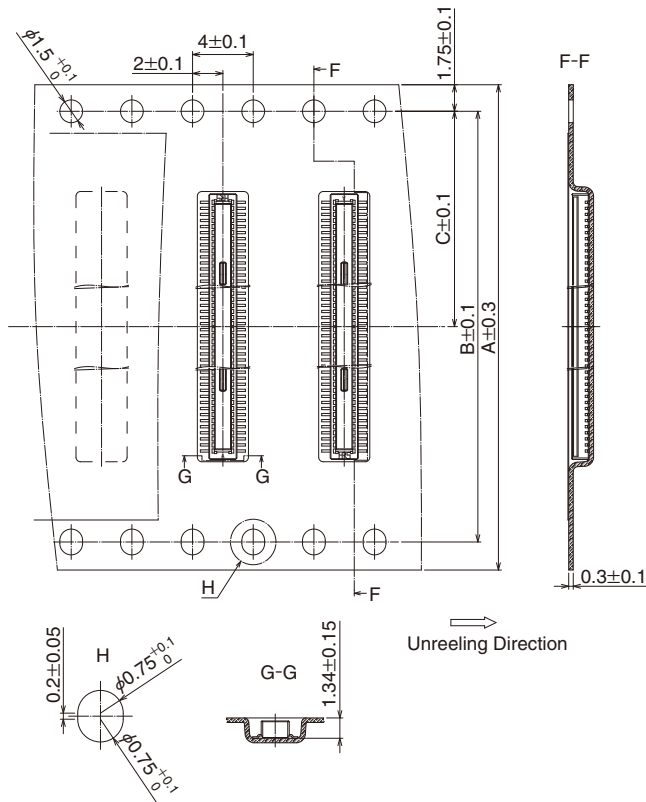

## ●Reel Dimensions

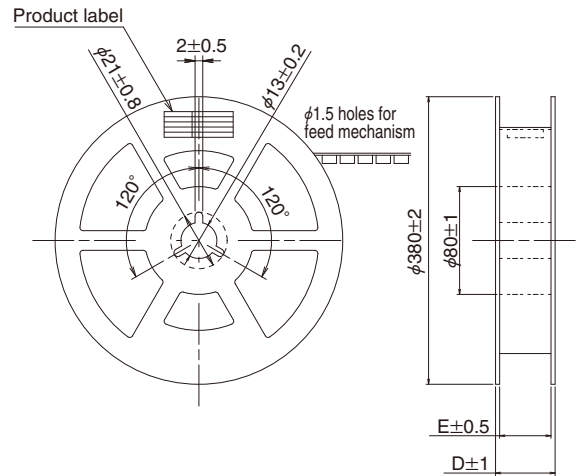


Unit: mm





| Part No.             | A  | B    | C    | D    | E    |
|----------------------|----|------|------|------|------|
| DF40C-10DP-0.4V(51)  | 12 | —    | 5.5  | 17.5 | 13.5 |
| DF40C-12DP-0.4V(51)  | 12 | —    | 5.5  | 17.5 | 13.5 |
| DF40C-20DP-0.4V(51)  | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-24DP-0.4V(51)  | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-30DP-0.4V(51)  | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40C-34DP-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-40DP-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-44DP-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-50DP-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-60DP-0.4V(51)  | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40C-70DP-0.4V(51)  | 32 | 28.4 | 14.2 | 37.5 | 33.5 |
| DF40C-80DP-0.4V(51)  | 32 | 28.4 | 14.2 | 37.5 | 33.5 |
| DF40C-90DP-0.4V(51)  | 44 | 40.4 | 20.2 | 49.5 | 45.5 |
| DF40C-100DP-0.4V(51) | 44 | 40.4 | 20.2 | 49.5 | 45.5 |
| DF40GB-30DP-0.4V(51) | 16 | —    | 7.5  | 21.5 | 17.5 |
| DF40GB-48DP-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 |
| DF40GB-70DP-0.4V(51) | 24 | —    | 11.5 | 29.5 | 25.5 |

(Note 1) For 10-60 contact position parts, the carrier tape only has one row of holes. The carrier for parts with 70 contacts and above has two rows of holes.





## ◆ Operating Precautions
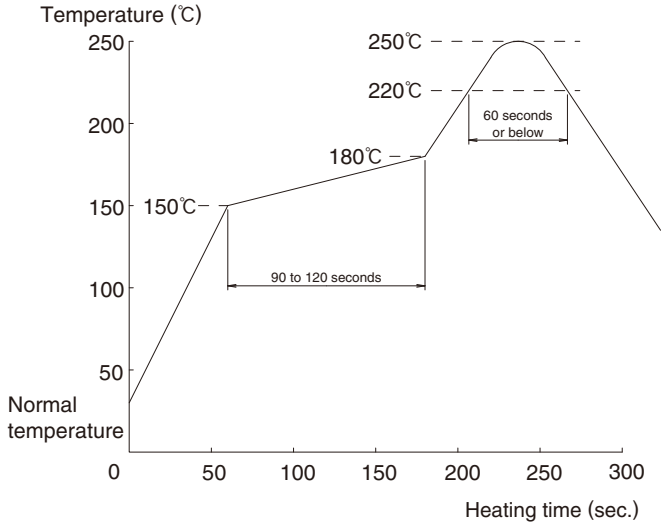
|                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Recommended Solder Profile                                          |  <p>The graph shows the recommended soldering temperature profile. The y-axis is Temperature (°C) from 0 to 250, and the x-axis is Heating time (sec.) from 0 to 300. The profile starts at 'Normal temperature' (approx. 25°C), rises to 150°C, then to 180°C. A horizontal segment at 180°C is labeled '90 to 120 seconds'. The temperature then rises to a peak of 250°C, with a horizontal segment at 220°C labeled '60 seconds or below'.</p> <p><b>【Conditions】</b></p> <ul style="list-style-type: none"> <li>1. Peak temperature      Maximum of 250°C</li> <li>2. Heating part            Minimum of 220°C within 60 seconds</li> <li>3. Preheating part        150~180°C    90~120 seconds</li> <li>4. Number of times        Maximum of 2 cycles</li> </ul> <p>(Note 1) The temperature shows PCB surface temperature near the connector lead part.</p>                                                                                        |
| 2. Recommended hand solder conditions                                  | Soldering iron temperature $340 \pm 10^{\circ}\text{C}$ , solder time no more than 3 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 3. Recommended screen thickness:<br>Opening ratio (pattern area ratio) | Thickness: 0.12 mm<br>Opening ratio: DS side 80% DP side 80%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 4. Leaning of PCB                                                      | Max 0.02 mm at the center of connector (using both edges of connector as criteria)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5. Washing                                                             | Cleaning/washing is not recommended for this connector. Cleaning agents can deteriorate the mechanical operation and the environmental resistance of this connector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 6. Precautions                                                         | <ul style="list-style-type: none"> <li>■ Do not mate or unmate these connectors until they are mounted, failure to follow this precaution can lead to deformation or damage to these connectors.</li> <li>■ Provide another form of support to the PCB, this connector was not designed to be the main form of support.</li> <li>■ Mating and unmating with excessive force can cause damage.</li> <li>■ Do not apply excessive amounts of flux as it may cause excess solder and flux wicking</li> <li>■ There may be a slight variance in the color of the molding between production lots, this variance will not affect the performance of the connector.</li> <li>■ Refer to the next page for the handling precautions when mating and unmating the connectors.</li> <li>■ If the connector becomes disconnected due to impact, a fall or a counterforce to the FPC, it may be necessary to hold the connector in place with an addition to the device's case or other cushioning material to hold the connector in place.</li> </ul> |


## ◆Precautions when connector mating
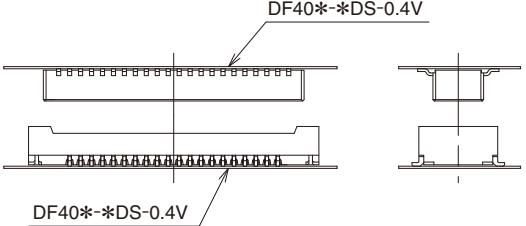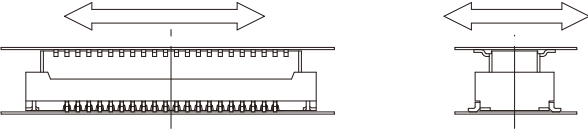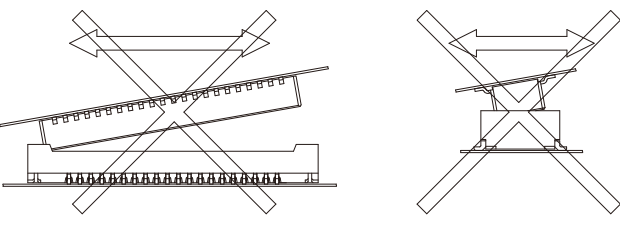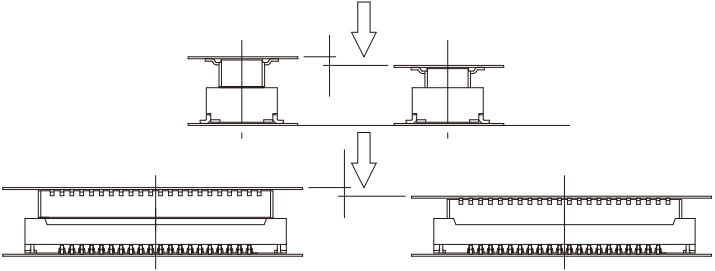
|                                                                                     |                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                                                                                                                                                                                                                                                |
|    |                                                                                                                                                                                                                                                |
|  | <p>Prior to mating, locate the guidance ribs and align the header.</p> <p>Do not apply excess force to the connector during mating. Doing so can lead to contact damage</p>                                                                    |
|  | <p>Make sure that the connector is parallel to the other side, it then will drop down slightly. Continue to press it down until it is fully mated while maintaining the angle. Do not apply excessive force as it may damage the contacts.</p> |

◆Precautions when unmating a connector

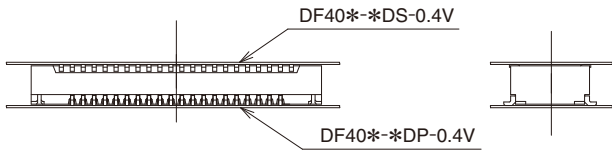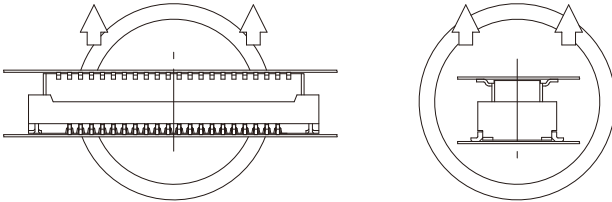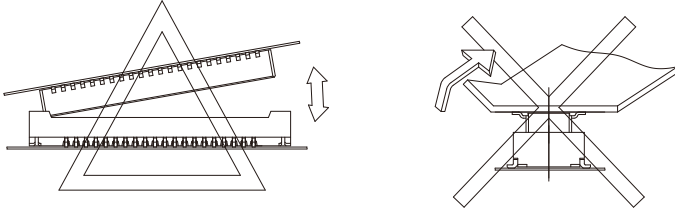
|                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                              | <p>To unmate this connector, lift evenly across the header, making sure that each side stays parallel to each other.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|  <p><b>Pitch direction</b>                      <b>Corner direction</b></p> | <p>If circumstances prevent the connectors from staying parallel to each other, then one side may be lifted as shown in the diagram. This method is only approved if the connector is mounted onto an extremely rigid circuit board. If the board were to warp during this process it may result in damage to the connector or its solder joints.</p> <p>Do not try to disconnect these connectors by pulling on one side or a corner, or unmate it while it is securely mounted onto a rigid FPC. These actions may lead to deformities and ultimately a damaged connector.</p> |
|  <p><b>Width direction</b></p>                                              | <p>As shown in the figure to the left, do not unmate it from the width direction (front to back), it may damage contacts.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## ◆ Precautions when unmating a connector

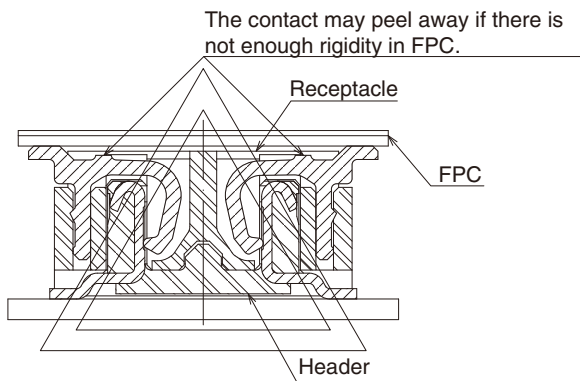


When mounting the receptacle side to FPC which does not have enough rigidity, the contact may peel away soldered connection.

We recommended to mount the header side to the FPC.

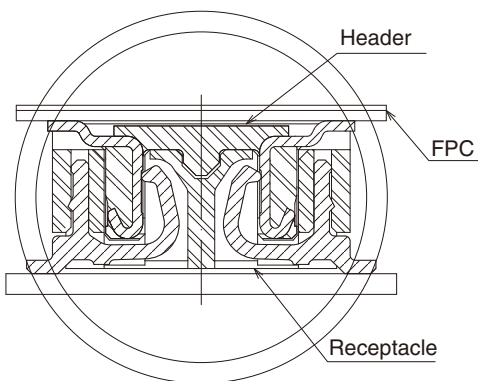

We have conducted evaluations on the requirements needed for FPC rigidity. If you need to mount the receptacle to the FPC, contact your local Hirose Rep for this data.

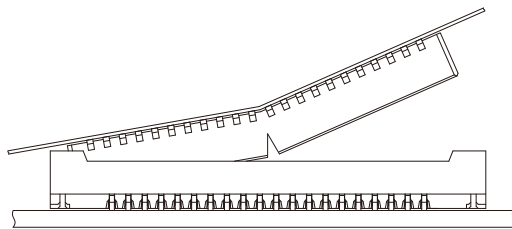

Even when mounting the header side to FPC, if the rigidity of FPC is low, the connector may break as shown in the left figure. Please check the strength and durability of FPC before using.

For the evaluation results of each item and FPC rigidity, please contact us.

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. Headquarters**  
2688 Westhills Court, Simi Valley, CA 93065-6235  
Phone : +1-805-522-7958  
Fax : +1-805-522-3217  
<http://www.hiroseusa.com>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. San Jose Office**  
3255 Scott Boulevard, Building 7, Suite 101  
Santa Clara, CA 95054  
Phone : +1-408-253-9640  
Fax : +1-408-253-9641  
<http://www.hiroseusa.com>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. Detroit Office (Automotive)**  
37677 Professional Center Drive, Suite #100C  
Livonia, MI 48154  
Phone : +1-734-542-9963  
Fax : +1-734-542-9964  
<http://www.hiroseusa.com>

**THE NETHERLANDS:**

**HIROSE ELECTRIC EUROPE B.V.**  
Hogehillweg #8 1101 CC Amsterdam Z-O  
Phone : +31-20-6557460  
Fax : +31-20-6557469  
<http://www.hiroseurope.com>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. German Branch**  
Herzog-Carl-Strasse 4 D-73760 Ostfildern  
(Scharnhauser Park)  
Phone : +49-711-4560-02-1  
Fax : +49-711-4560-02-299  
<http://www.hirose.de>

**UNITED KINGDOM:**

**HIROSE ELECTRIC EUROPE B.V. UK Branch**  
22 Vincent Avenue, Crownhill Business  
Centre, Crownhill, Milton Keynes, MK8 0AB  
Phone : +44-1908-305750  
Fax : +44-1908-305768  
<http://www.hirose.co.uk>

**CHINA:**

**HIROSE ELECTRIC TRADING (SHANGHAI) CO., LTD.**  
1601, Henderson Metropolitan, NO.300, East Nanjing  
Road, Huangpu District, Shanghai, China 200001  
Phone : +86-21-6391-3355  
Fax : +86-21-6391-3335  
<http://www.hirose-china.com.cn>

**CHINA:**

**HIROSE ELECTRIC TRADING (SHANGHAI) CO., LTD. Beijing Branch**  
A1001, Ocean International Center, Building 56# East 4th  
Ring Middle Road, Chao Yang District, Beijing, 100025  
Phone : +86-10-5165-9332  
Fax : +86-10-5908-1381  
<http://www.hirose-china.com.cn>

**CHINA:**

**HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.**  
Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre  
5002, ShenNanDong Road, ShenZhen City, Guangdong Province, 518008  
Phone : +86-755-8207-0851  
Fax : +86-755-8207-0873  
<http://www.hirose-china.com.cn>

**HONG KONG:**

**HIROSE ELECTRIC HONGKONG TRADING CO., LTD.**  
Room 1001, West Wing, Tsim Sha Tsui Centre, 66  
Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong  
Phone : +852-2803-5338  
Fax : +852-2591-6560  
<http://www.hirose-hongkong.com.hk>

**TAIWAN:**

**HIROSE ELECTRIC TAIWAN CO., LTD.**  
103 8F, No.87, Zhengzhou Rd., Taipei  
Phone : +886-2-2555-7377  
Fax : +886-2-2555-7350  
<http://www.hirose-taiwan.com.tw>

**KOREA:**

**HIROSE KOREA CO., LTD.**  
1261-10, Jeoungwhang-Dong, Shihung-City,  
Kyunggi-Do 429-450  
Phone : +82-31-496-7000, 7124  
Fax : +82-31-496-7100  
<http://www.hirose.co.kr>

**SINGAPORE:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD.**  
10 Anson Road #26-1 International Plaza  
079903  
Phone : +65-6324-6113  
Fax : +65-6324-6123  
<http://www.hirose-singapore.com.sg>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD. Bangalore Liaison office**  
Unit No.03, Ground Floor, Explorer Building International Tech  
Park Whitefield Road, Bangalore 560066 Karnataka, India  
Phone : +65-6324-6113  
Fax : +65-6324-6123  
<http://www.hirose-singapore.com.sg>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD Delhi Liaison Office**  
Suite No. 606 5th Floor SB Tower 1A/1 Sector  
16 A Filmcity Noida 201301 Uttar Pradesh-India  
Phone : +91-120-4804917  
Fax : +91-120-4804949  
<http://www.hirose.com/sg/>

**MALAYSIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD (Representative office)**  
1-10-07, Suntech @ Penang Cybercity (1164), Lintang  
Mayang Pasir 3, 11950, Bayan Baru, Penang, Malaysia.  
Phone : +604-619-2564  
Fax : +604-619-2574  
<http://www.hirose.com/sg/>



## HIROSE ELECTRIC CO.,LTD.

6-3, Nakagawa Chuoh-2-Chome, Tsuzuki-Ku, Yokohama-Shi 224-8540, JAPAN  
TEL: +81-45-620-3526 Fax: +81-45-591-3726  
<http://www.hirose.com>  
<http://www.hirose-connectors.com>

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)