


- NOTES:
- 1.0 MATERIALS:
    - 1.1 HOUSING & NUT: STAINLESS STEEL PER ASTM-A582, TYPE 303.
    - 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
    - 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
  - 2.0 PLATING:
    - 2.1 HOUSING & NUT: PASSIVATED PER MIL-F-14072 & QQ-P-35.
    - 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.
  - 3.0 ELECTRICAL SPECIFICATIONS:
    - 3.1 FREQUENCY RANGE: DC to 18.0 GHz
    - 3.2 VSWR (MAX.):
      - DC to 4.0 GHz: 1.04:1
      - 4.0 TO 8.0 GHz: 1.07:1
      - 8.0 to 18.0 GHz: 1.12:1
    - 3.3 IMPEDANCE: 50 OHMS
  - 4.0 MARKING: MARK UNIT AS SHOWN (REF: INK-02669-27-26)
  - 5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

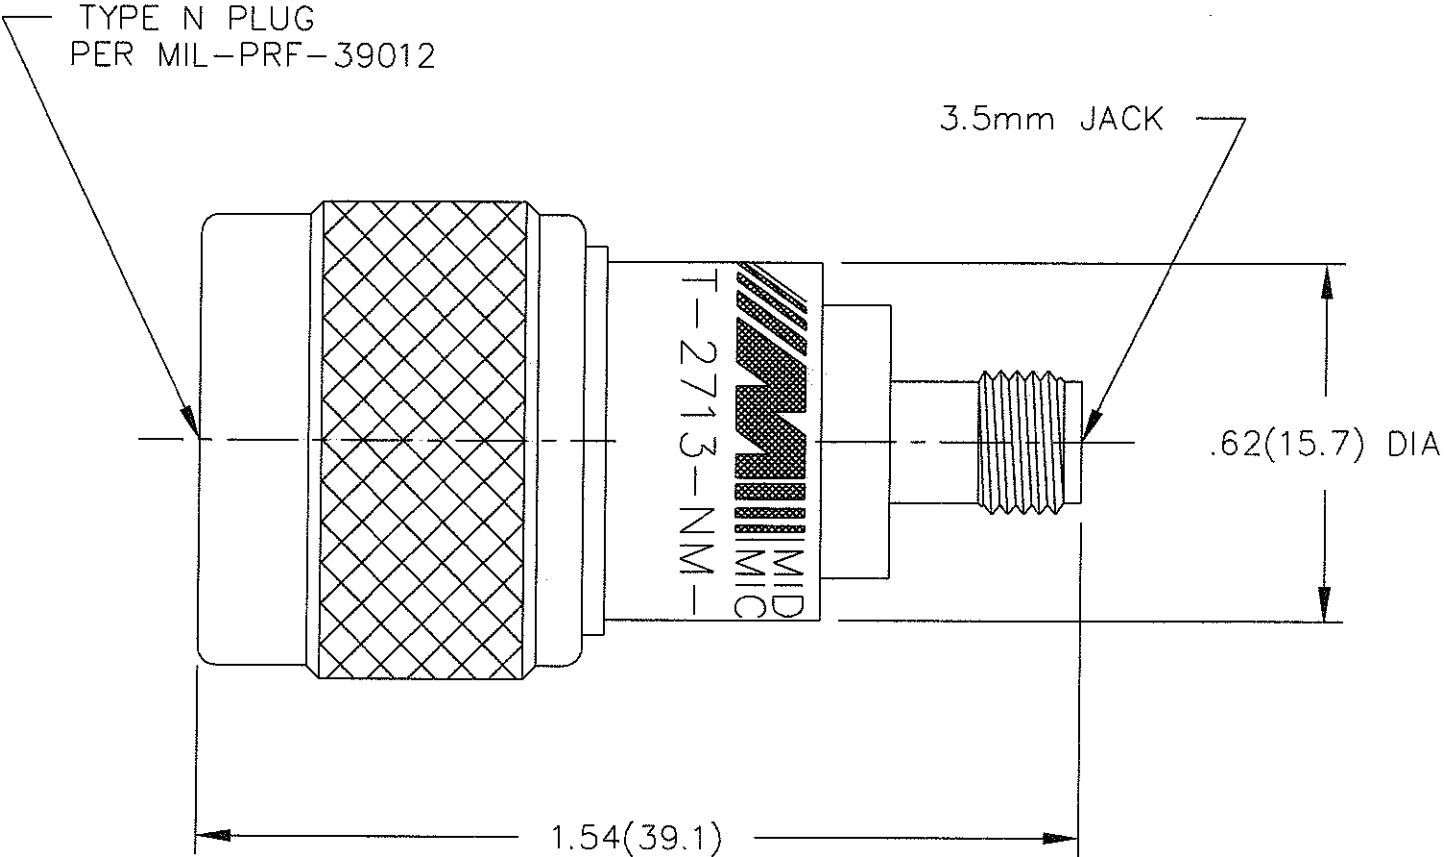

DWG. NO. WAS: 04458-01-00

| REV. | DESCRIPTION      | DATE     |
|------|------------------|----------|
| -    | RELEASED         | 3/3/83   |
| A    | ECR 2803         | 4/19/84  |
| B    | ECR 6545         | 7/25/89  |
| B1   | UPDATE MODEL #   | 8/10/92  |
| C    | UPDATE ON CAD    | 12/16/92 |
| D    | ECN 16983        | 2/16/99  |
| D1   | ADDED TITLEBLOCK | 3/16/05  |

|                                                                                                                                                                                                                                                                         |  |                                                                                                                                   |                          |                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:<br><br>3 PLACE DECIMALS ±.005<br>2 PLACE DECIMALS ±.02<br>FRACTIONS ±1/64<br>PARALLELITY: T.I.R. _____<br>FLATNESS: T.I.R. _____<br>CONCENTRICITY: T.I.R. _____<br>ANGLES AND PERPENDICULARITY: ±1° |  | FSCM NO.<br><b>34078</b>                                                                                                          | <b>MIDWEST MICROWAVE</b> |                                                   |
|                                                                                                                                                                                                                                                                         |  | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave |                          | TITLE<br><br>ADAPTER<br>3.5mm JACK to TYPE N PLUG |
| DRAWN/DATE<br>A.BEATTY<br>6/11/93                                                                                                                                                                                                                                       |  | ENG./DATE<br>A.OSGA<br>12/18/92                                                                                                   |                          | DRAWING NUMBER<br>ADT-2713-NM-3MF-02              |
| CHECKED/DATE<br>A.BEATTY<br>12/18/92                                                                                                                                                                                                                                    |  | APPROVED/DATE                                                                                                                     |                          | SCALE: 3=1 SHEET 1 of 1                           |

| MODEL NUMBER       | REV. |
|--------------------|------|
| ADT-2713-NM-3MF-02 | D1   |

## Authorized Distribution Brand :



## Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

## Contact Us :

### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

### ➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

### ➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

### ➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)