


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

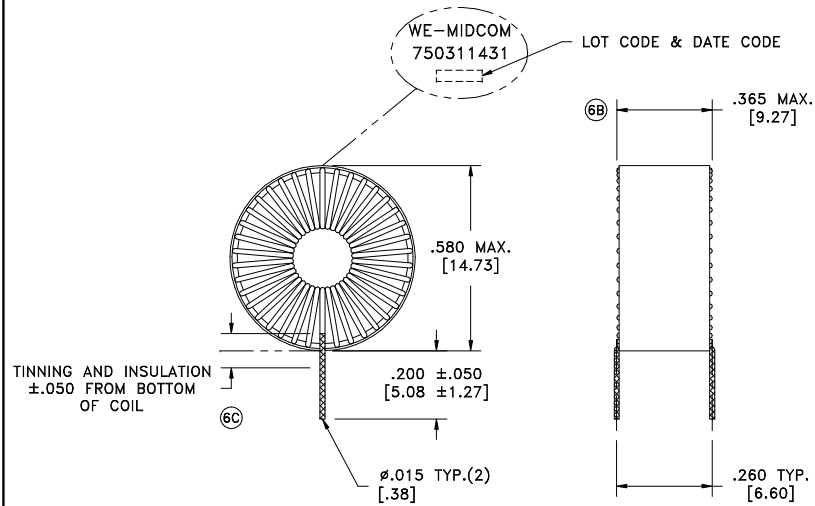


ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6B D.C. RESISTANCE	S-F @20°C	0.57 ohms max.
INDUCTANCE	S-F 100kHz, 100mVAC, Ls	750uH $\pm$ 20%


GENERAL SPECIFICATIONS: CURRENT RATING: 250mA DC.

- 6D It is recommended that the 750311431 Inductor be secured to the PCB with epoxy.



DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6D	4/11	Method: Tray	Angles: $\pm 1^\circ$	INDUCTOR	750311431
6C	12/10	PKG-0788	Decimals: $\pm .005$ [.13]		
6B	6/10	www.we-online.com/midcom	Fractions: $\pm 1/64$		
6A	4/10	SEE REVISION SHEET FOR REVISION LEVEL	Footprint:		



This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: 750311431



SPECIFICATION SHEET 1 OF 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com