


THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER  
ORIGINAL  
①

**MATERIALS:**

INSULATOR: THERMOPLASTIC POLYESTER, UL94V-0  
CHEMICAL RESISTANCE, COLOR BLACK

SHEEL: STEEL, NICKEL PLATED

CONTACT: BRASS

GOLD FLASH (CONTACT CODE 230)  
10 MICROINCHES GOLD (CONTACT CODE 530)  
30 MICROINCHES GOLD (CONTACT CODE 630)  
TIN PLATING ON TAIL ENDS

**ELECTRICAL:**

CURRENT RATING: 5 AMPERES  
DIELECTRIC WITHSTANDING VOLTAGE:

1000VAC rms AT SEA LEVEL


OPERATING VOLTAGE: 250 VAC AT 50/60 HZ.

INSULATION RESISTANCE: 5000 MEGOHMS MIN.

CONTACT RESISTANCE: 10 MILLIOHMS MAX.

WORKING TEMPERATURE: -55° TO +125° C

**NOTE: ALL CONNECTORS WITH THREADED INSERTS MUST WITHSTAND  
A MIN. TORQUE OF 3 Kgf-cm**

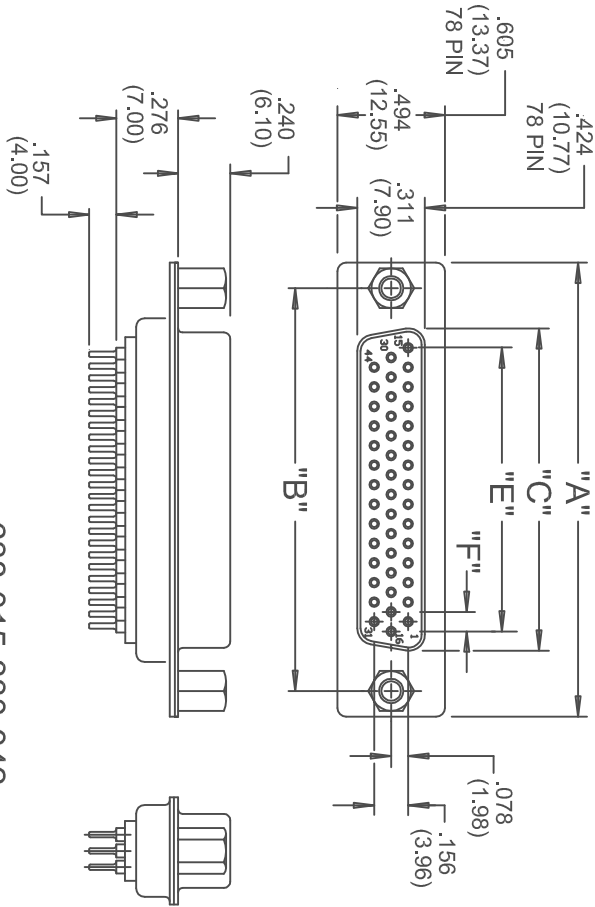

**ORDERING CODE**

SERIES \_\_\_\_\_  
NUMBER OF CONTACTS \_\_\_\_\_  
CONTACT FINISH CODE \_\_\_\_\_  
CONNECTOR CODE \_\_\_\_\_  
30- LOW PROFILE P.C.B. TAILS  
GROUNDING FEATURE \_\_\_\_\_  
4- METAL COVERED \_\_\_\_\_  
MOUNTING OPTIONAL \_\_\_\_\_  
1- .125(3.18) DIA. THROUGH HOLE  
2- 4-40 UNC THREADED INSERT  
3- 4-40 UNC THREADED STANDOFFS  
6- 4-40 UNC THREADED INSERT WITH BOARDLOCKS  
7- 4-40 UNC THREADED STANDOFF WITH BOARDLOCKS  
8- 4-40 UNC THREADED FIXED STANDOFF

638-015-330-042

| NUMBER OF<br>CONTACTS | "A"   |         | "B"   |         | "C"   |         | "E"   |         | "F"  |        |
|-----------------------|-------|---------|-------|---------|-------|---------|-------|---------|------|--------|
|                       | Inch  | (mm)    | Inch  | (mm)    | Inch  | (mm)    | Inch  | (mm)    | Inch | (mm)   |
| 15                    | 1.214 | (30.84) | .984  | (24.99) | .642  | (16.30) | .405  | (10.29) | .090 | (2.29) |
| 26                    | 1.545 | (39.24) | 1.312 | (33.32) | .971  | (24.66) | .765  | (19.43) | .090 | (2.29) |
| 44                    | 2.088 | (53.04) | 1.852 | (47.04) | 1.511 | (38.38) | 1.305 | (33.15) | .090 | (2.29) |
| 62                    | 2.730 | (69.34) | 2.500 | (63.50) | 2.159 | (54.84) | 1.948 | (49.47) | .095 | (2.41) |
| 78                    | 2.635 | (66.93) | 2.406 | (61.11) | 2.064 | (52.42) | 1.805 | (45.85) | .095 | (2.41) |



THIS CONNECTOR FULLY CONFORMS  
TO THE EUROPEAN UNION DIRECTIVES  
2002/95/EC AND 2002/96/EC FOR  
ROHS COMPLIANCY.

638 SERIES HIGH DENSITY SUBMINIATURE D CONNECTOR  
RECEPTACLE(SOCKET) VERTICAL MOUNT P.C.B

LOW PROFILE METAL BODY

EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC. AND  
SHALL NOT BE REPRODUCED OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

PART NUMBER

DRAWN: F. BRIONES  
CHECKED: DATE: NOV. 26/97

SEE ORDERING CODE

DRAWING NUMBER

638-000-001

ISSUE

6

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
Email        amall@ameya360.com  
QQ            800077892  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
Email        mkt@ameya360.com