
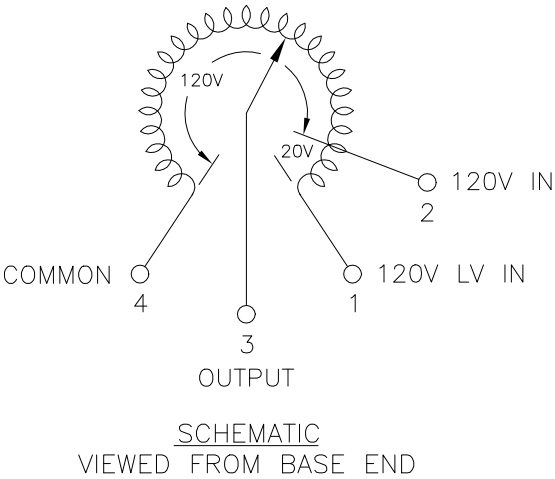


SPECIFICATIONS									
WIRING	INPUT		VOLTS	OUTPUT				TERMINAL CONNECTIONS AS VIEWED FROM BASE END	
	VOLTS	HERTZ		CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD			
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	INPUT	OUTPUT
SINGLE PHASE	120	50/60	0-120	5.0	0.60	7.0	0.84	1-4	4-3
			0-140	5.0	0.70	-	-	4-2	4-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: 511						
DECIMALS	Holes	ANGLES							
.XX .0001	.06	1°	1-1/2°	IN [mm]	DRAWN BY S.A. SMITH DATE 2/6/96 FIRST USED ON DO NOT SCALE DWG. CUSTOMER APPROVAL DATE				
XXX .005									
MATERIAL				STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.					
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO.	DWG. SIZE	DWG. NO.
				ENGINEER	DATE	SCALE	SHEET	D	031-0825
						1 = 1	1 OF 1		

Authorized Distribution Brand :

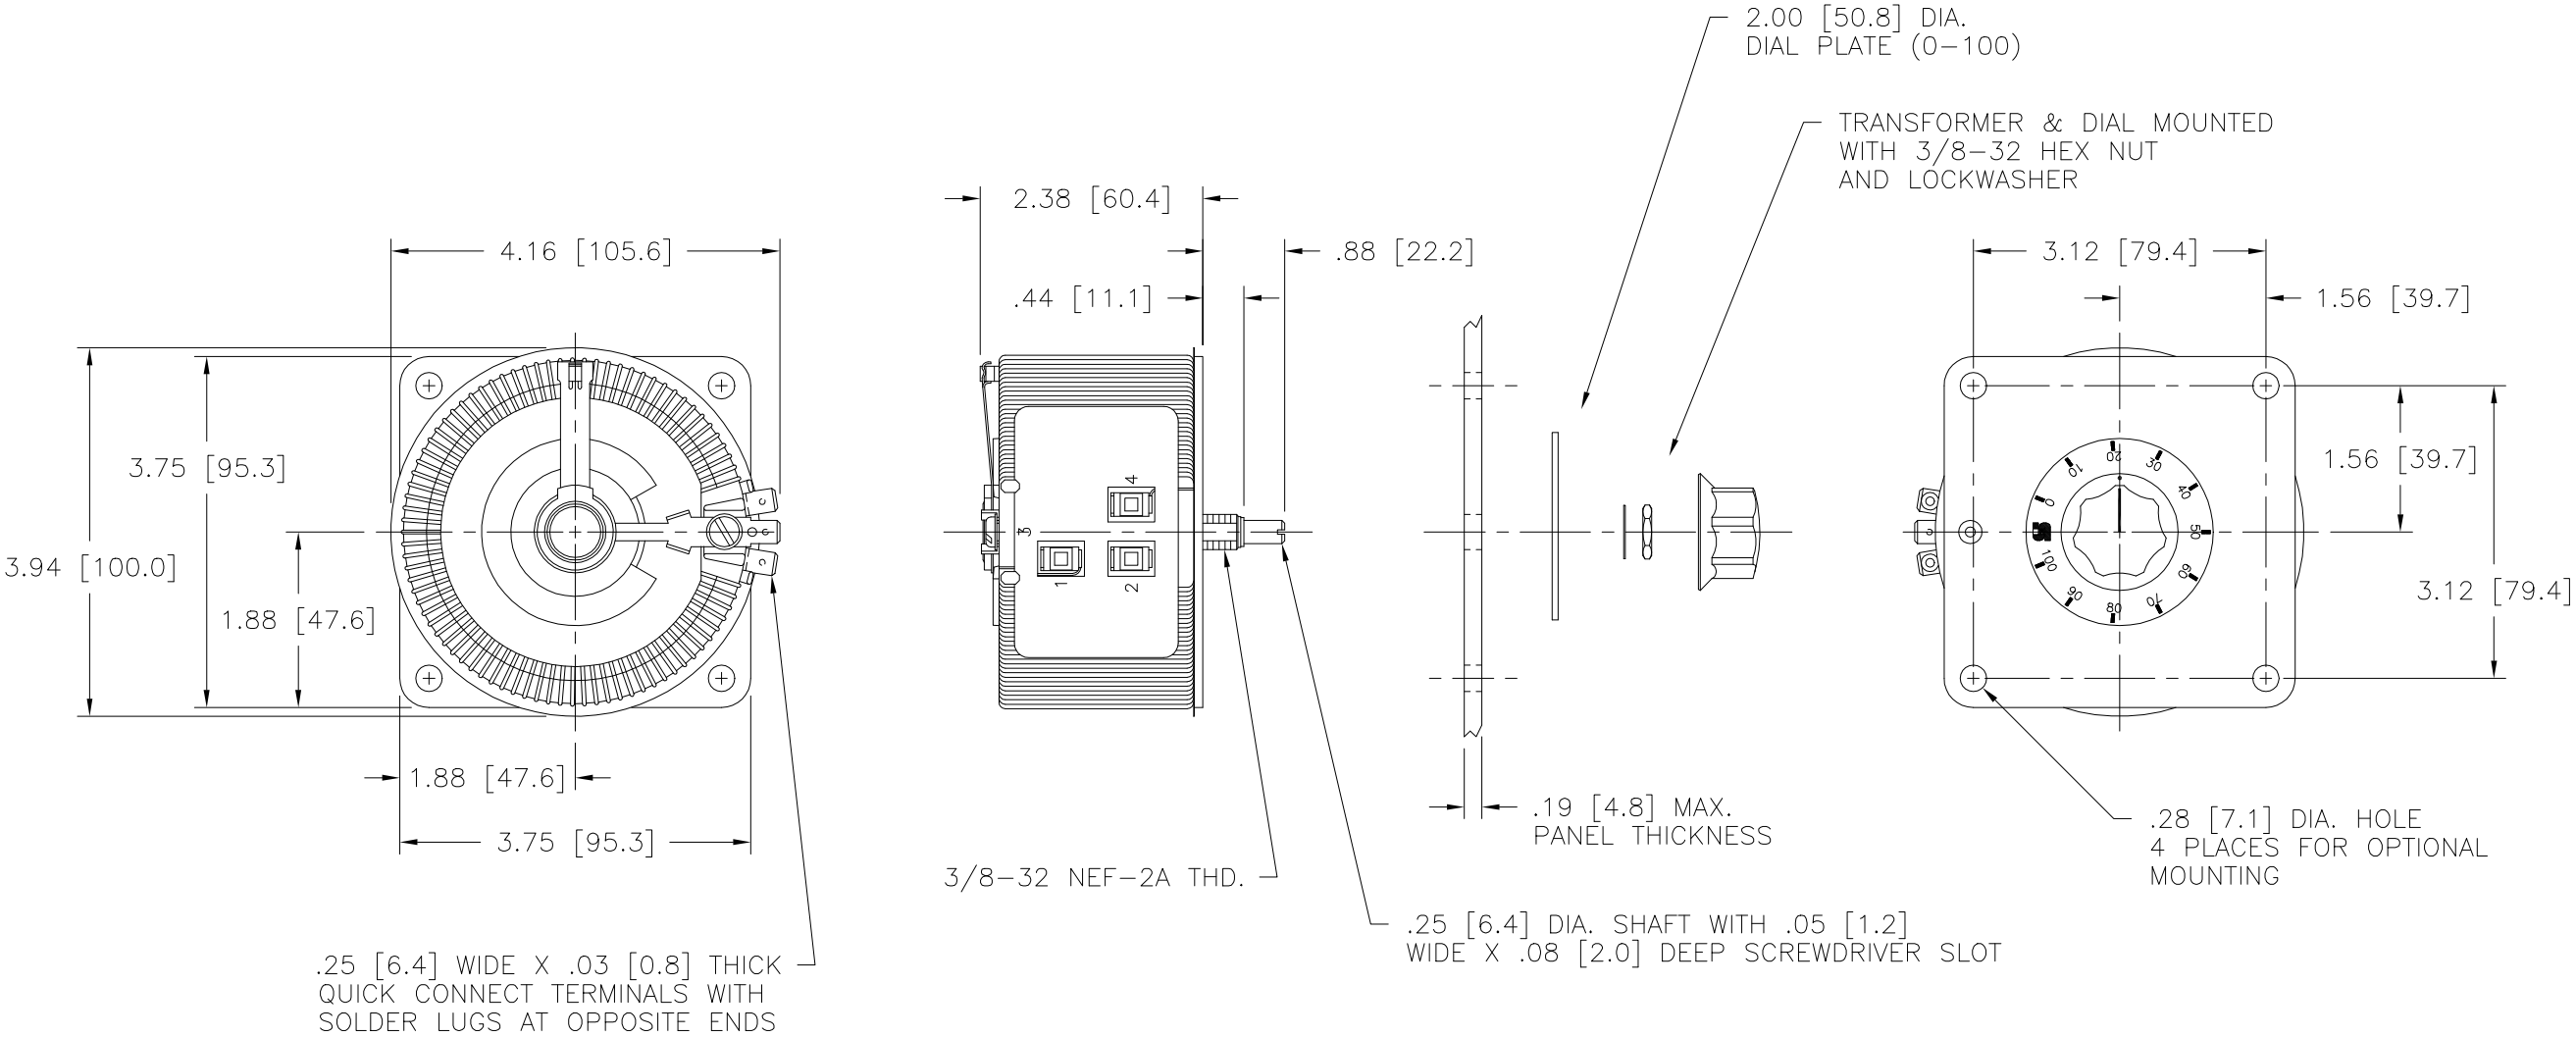

Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com