


Surface Mount Quad Photodiode

OPR5911

Features:

- Surface mountable
- Closely matched responsivity
- High temperature operation
- Common cathode connections

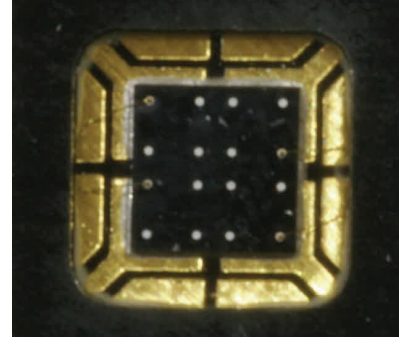

Description:

Each OPR5911 device is a four-element photodiode that is enclosed in a compact polyimide chip carrier and designed for a variety of encoder and control applications. The single chip construction ensures excellent matching and very tight dimensional tolerances between active areas. The custom opaque package shields the photodiodes from stray light and can withstand multiple exposures to the most demanding soldering conditions, while the wraparound gold-plated solder pads offer exceptions storage and wetting characteristics.

All cathodes in the OPR5911 are bonded together, which enables the elements to act in unison with limited external circuitry.

See Application Bulletin 237 for handling considerations.



Applications:

- Encoder applications
- Control applications




Ordering Information

Part Number	Receiver Type	# of Elements	Responsivity (mA/mW) Min.	Reverse Voltage Min.	Active Area (mm ²)	Packaging
OPR5911	Photodiode Array	4	0.45	14	1.61 (each)	Chip Tray

Warning: Front Window is pressure sensitive. Do not apply pressure or high vacuum to window.

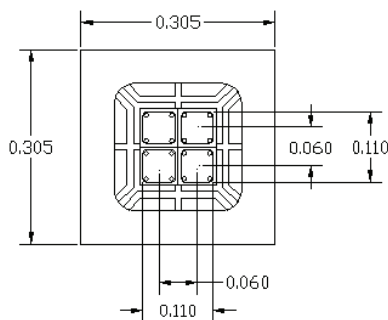

OPR5911

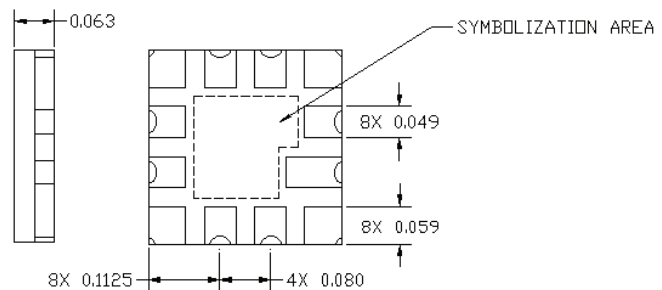

Pin #	Function	Pin #	Function
1	Anode 1	7	Anode 3
2	Common Cathode	8	Common Cathode
3	N.C. / N.C.	9	N.C. / N.C.
4	N.C. / N.C.	10	N.C. / N.C.
5	Common Cathode	11	Common Cathode
6	Anode 2	12	Anode 4

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage and Operating Temperature	-55° C to +125° C
Reverse Breakdown Voltage	14 V / minute
Solder reflow time within 5°C of peak temperature is 20 to 40 seconds ⁽¹⁾	250° C


Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
R	Responsivity	0.45	—	—	A/W	$E_e = 10\ \mu\text{W}$, $\lambda = 850\ \text{nm}$, $V_R = 0$
V_{BR}	Reverse Breakdown Voltage	14	—	—	V	$I_R = 100\ \mu\text{A}$
I_D	Reverse Dark Current	—	—	30	nA	$V_R = 10\ \text{V}$
C_T	Capacitance	—	10	—	pF	$V_R = 10\ \text{V}$
L X W	Active Area (per diode)	—	1.61	—	mm ²	(1.27 mm x 1.27 mm)

Notes:

1. Solder time less than 5 seconds at temperature extreme.

Spectral Responsivity

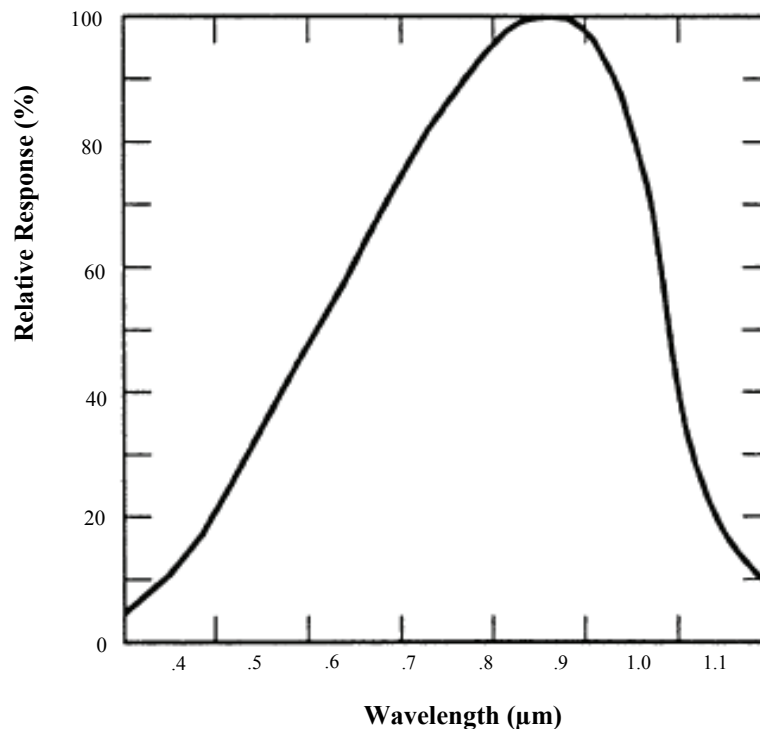

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Surface Mount Quad Photodiode


OPR5911

Packaging

Bare Die/CSP Tray Detail

H44-359-62C02

Dimensions

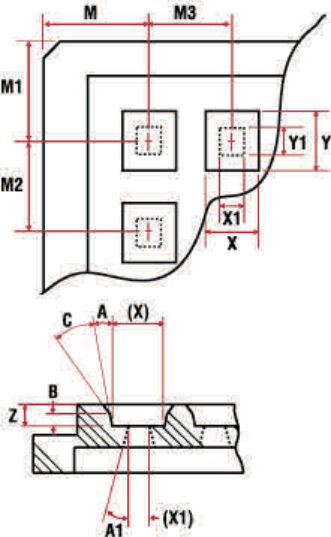

POCKET LOCATIONS

M	= 0.592" ±0.005"
M1	= 0.592" ±0.005"
M2	= 0.401" ±0.005"
M3	= 0.401" ±0.005"
Array	= 8x8 (64)

POCKET DETAILS

X	= 0.361" ±0.005" <i>pocket size</i>
Y	= 0.361" ±0.005" <i>pocket size</i>
Z	= 0.100" ±0.005" <i>pocket depth</i>
A	= 5° ±1/2° <i>pocket draft angle</i>
No Cross Slots	


OVERALL TRAY SIZE

Size	= 3.990" ±0.010"
Height	= 0.315" +0.005" -0.005"
Flatness	= 0.020"

UNIT OF MEASURE

- ☒ English
☐ Metric

Orientation

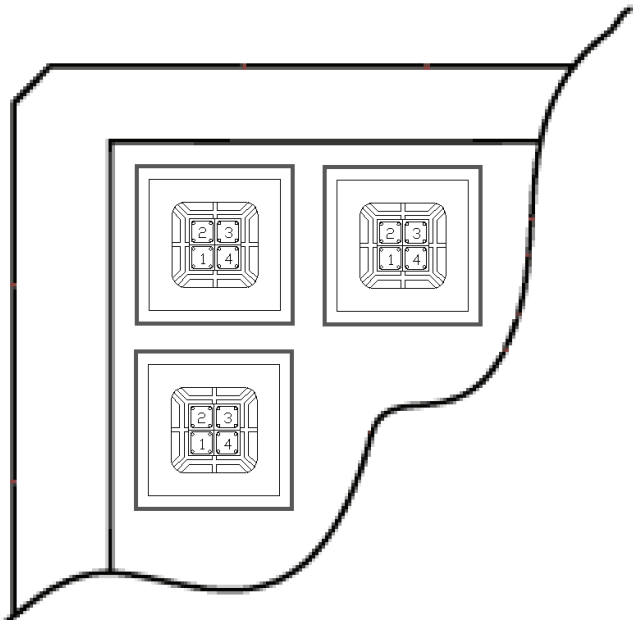

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com