

# FODM8801A, FODM8801B, FODM8801C

## OptoHiT™ Series, High-Temperature Phototransistor Optocoupler in Half-Pitch Mini-Flat 4-Pin Package

### Features

- Utilizing Proprietary Process Technology to Achieve High Operating Temperature: up to 125°C
- Guaranteed Current Transfer Ratio (CTR) Specifications Across Full Temperature Range
  - Excellent CTR Linearity at High-Temperature
  - CTR at Very Low Input Current,  $I_F$
- High Isolation Voltage Regulated by Safety Agency: C-UL / UL1577, 3750 VAC<sub>RMS</sub> for 1 minute and DIN EN/IEC60747-5-5
- Compact Half-Pitch, Mini-Flat, 4-Pin Package (1.27 mm Lead Pitch, 2.4 mm Maximum Standoff Height)
- > 5mm Creepage and Clearance Distance
- Applicable to Infrared Ray Reflow, 245°C

### Applications

- Primarily Suited for DC-DC Converters
- Ground-Loop Isolation, Signal-Noise Isolation
- Communications – Adapters, Chargers
- Consumer – Appliances, Set-Top Boxes
- Industrial – Power Supplies, Motor Control, Programmable Logic Control

### Description

In the OptoHiT™ series, the FODM8801 is a first-of-kind phototransistor, utilizing Fairchild's leading-edge proprietary process technology to achieve high operating temperature characteristics, up to 125°C. The optocoupler consists of an aluminum gallium arsenide (AlGaAs) infrared light-emitting diode (LED) optically coupled to a phototransistor, available in a compact half-pitch, mini-flat, 4-pin package. It delivers high current transfer ratio at very low input current. The input-output isolation voltage,  $V_{ISO}$ , is rated at 3750 VAC<sub>RMS</sub>.

### Schematic

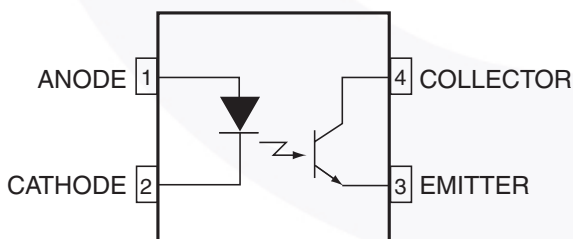


Figure 1. Schematic

### Package




Figure 2. Half-Pitch Mini-Flat

## Safety and Insulation Ratings for Half-Pitch Mini-Flat Package

As per DIN EN/IEC 60747-5-5. This optocoupler is suitable for “safe electrical insulation” only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

| Symbol                | Parameter                                                                                                                                                       | Min.            | Typ.      | Max. | Unit              |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|------|-------------------|
|                       | Installation Classifications per DIN VDE 0110/1.89 Table 1                                                                                                      |                 |           |      |                   |
|                       | For rated main voltage < 150 Vrms                                                                                                                               |                 | I-IV      |      |                   |
|                       | For rated main voltage < 300 Vrms                                                                                                                               |                 | I-III     |      |                   |
|                       | Climatic Classification                                                                                                                                         |                 | 40/125/21 |      |                   |
|                       | Pollution Degree (DIN VDE 0110/1.89)                                                                                                                            |                 | 2         |      |                   |
| CTI                   | Comparative Tracking Index                                                                                                                                      | 175             |           |      |                   |
| V <sub>PR</sub>       | Input to Output Test Voltage, Method b, V <sub>IORM</sub> x 1.875 = V <sub>PR</sub> , 100% Production Test with t <sub>m</sub> = 1 sec, Partial Discharge < 5pC | 1060            |           |      | V <sub>peak</sub> |
| V <sub>PR</sub>       | Input to Output Test Voltage, Method a, V <sub>IORM</sub> x 1.5 = V <sub>PR</sub> , Type and Sample Test with t <sub>m</sub> = 60 sec, Partial Discharge < 5pC  | 848             |           |      | V <sub>peak</sub> |
| V <sub>IORM</sub>     | Max Working Insulation Voltage                                                                                                                                  | 565             |           |      | V <sub>peak</sub> |
| V <sub>IOTM</sub>     | Highest Allowable Over Voltage                                                                                                                                  | 4000            |           |      | V <sub>peak</sub> |
|                       | External Creepage                                                                                                                                               | 5               |           |      | mm                |
|                       | External Clearance                                                                                                                                              | 5               |           |      | mm                |
|                       | Insulation thickness                                                                                                                                            | 0.5             |           |      | mm                |
| T <sub>S</sub>        | Safety Limit Values- Maximum Values allowed in the event of a failure,                                                                                          |                 |           |      |                   |
|                       | Case Temperature                                                                                                                                                | 150             |           |      | °C                |
| I <sub>S,INPUT</sub>  | Input Current                                                                                                                                                   | 200             |           |      | mA                |
| P <sub>S,OUTPUT</sub> | Output Power                                                                                                                                                    | 300             |           |      | mW                |
| R <sub>IO</sub>       | Insulation Resistance at T <sub>S</sub> , V <sub>IO</sub> =500 V                                                                                                | 10 <sup>9</sup> |           |      | Ω                 |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.  $T_A = 25^\circ\text{C}$  unless otherwise specified

| Symbol                   | Parameter                                                                   | Value        | Units            |
|--------------------------|-----------------------------------------------------------------------------|--------------|------------------|
| <b>TOTAL PACKAGE</b>     |                                                                             |              |                  |
| $T_{\text{STG}}$         | Storage Temperature                                                         | -40 to +150  | $^\circ\text{C}$ |
| $T_{\text{OPR}}$         | Operating Temperature                                                       | -40 to +125  | $^\circ\text{C}$ |
| $T_J$                    | Junction Temperature                                                        | -40 to +140  | $^\circ\text{C}$ |
| $T_{\text{SOL}}$         | Lead Solder Temperature<br>(Refer to Reflow Temperature Profile on page 13) | 260 for 10 s | $^\circ\text{C}$ |
| <b>EMITTER</b>           |                                                                             |              |                  |
| $I_{\text{F(average)}}$  | Continuous Forward Current                                                  | 20           | mA               |
| $V_R$                    | Reverse Input Voltage                                                       | 6            | V                |
| $\text{PD}_{\text{LED}}$ | Power Dissipation <sup>(1)(3)</sup>                                         | 40           | mW               |
| <b>DETECTOR</b>          |                                                                             |              |                  |
| $I_{\text{C(average)}}$  | Continuous Collector Current                                                | 30           | mA               |
| $V_{\text{CEO}}$         | Collector-Emitter Voltage                                                   | 75           | V                |
| $V_{\text{ECO}}$         | Emitter-Collector Voltage                                                   | 7            | V                |
| $\text{PD}_\text{C}$     | Collector Power Dissipation <sup>(2)(3)</sup>                               | 150          | mW               |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol               | Parameter                  | Value        | Units            |
|----------------------|----------------------------|--------------|------------------|
| $T_A$                | Operating Temperature      | -40 to +125  | $^\circ\text{C}$ |
| $V_{\text{FL(OFF)}}$ | Input Low Voltage          | -5.0 to +0.8 | V                |
| $I_{\text{FH}}$      | Input High Forward Current | 1 to 10      | mA               |

## Isolation Characteristics

| Symbol           | Parameter                      | Test Conditions                                                                            | Min.      | Typ. | Max. | Unit                      |
|------------------|--------------------------------|--------------------------------------------------------------------------------------------|-----------|------|------|---------------------------|
| $V_{\text{ISO}}$ | Input-Output Isolation Voltage | $f = 60 \text{ Hz}$ , $t = 1 \text{ min.}$ , $I_{\text{I-O}} \leq 10 \mu\text{A}^{(4)(5)}$ | 3,750     |      |      | $\text{VAC}_{\text{RMS}}$ |
| $R_{\text{ISO}}$ | Isolation Resistance           | $V_{\text{I-O}} = 500 \text{ V}^{(4)}$                                                     | $10^{12}$ |      |      | $\Omega$                  |
| $C_{\text{ISO}}$ | Isolation Capacitance          | $f = 1 \text{ MHz}$                                                                        |           | 0.3  | 0.5  | pF                        |

### Notes:

- Derate linearly from  $73^\circ\text{C}$  at a rate of  $0.24 \text{ mW}/^\circ\text{C}$
- Derate linearly from  $73^\circ\text{C}$  at a rate of  $2.23 \text{ mW}/^\circ\text{C}$ .
- Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.
- Device is considered a two-terminal device: pins 1 and 2 are shorted together and pins 3 and 4 are shorted together.
- 3,750  $\text{VAC}_{\text{RMS}}$  for 1 minute is equivalent to 4,500  $\text{VAC}_{\text{RMS}}$  for 1 second.

## Electrical Characteristics

Apply over all recommended conditions ( $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  unless otherwise specified).

All typical values are measured at  $T_A = 25^{\circ}\text{C}$ .

| Symbol                    | Parameter                           | Conditions                                                                   | Min. | Typ. | Max. | Units                   |
|---------------------------|-------------------------------------|------------------------------------------------------------------------------|------|------|------|-------------------------|
| <b>EMITTER</b>            |                                     |                                                                              |      |      |      |                         |
| $V_F$                     | Forward Voltage                     | $I_F = 1\text{ mA}$                                                          | 1.00 | 1.35 | 1.80 | V                       |
| $\Delta V_F / \Delta T_A$ | Forward-Voltage Coefficient         | $I_F = 1\text{ mA}$                                                          |      | -1.6 |      | mV / $^{\circ}\text{C}$ |
| $I_R$                     | Reverse Current                     | $V_R = 6\text{ V}$                                                           |      |      | 10   | $\mu\text{A}$           |
| $C_T$                     | Terminal Capacitance                | $V = 0\text{ V}$ , $f = 1\text{ MHz}$                                        |      | 30   |      | pF                      |
| <b>DETECTOR</b>           |                                     |                                                                              |      |      |      |                         |
| $BV_{CEO}$                | Collector-Emitter Breakdown Voltage | $I_C = 0.5\text{ mA}$ , $I_F = 0\text{ mA}$                                  | 75   | 130  |      | V                       |
| $BV_{ECO}$                | Emitter-Collector Breakdown Voltage | $I_E = 100\text{ }\mu\text{A}$ , $I_F = 0\text{ mA}$                         | 7    | 12   |      | V                       |
| $I_{CEO}$                 | Collector Dark Current              | $V_{CE} = 75\text{ V}$ , $I_F = 0\text{ mA}$ ,<br>$T_A = 25^{\circ}\text{C}$ |      |      | 100  | nA                      |
|                           |                                     | $V_{CE} = 50\text{ V}$ , $I_F = 0\text{ mA}$                                 |      |      | 50   | $\mu\text{A}$           |
|                           |                                     | $V_{CE} = 5\text{ V}$ , $I_F = 0\text{ mA}$                                  |      |      | 30   | $\mu\text{A}$           |
| $C_{CE}$                  | Capacitance                         | $V_{CE} = 0\text{ V}$ , $f = 1\text{ MHz}$                                   |      | 8    |      | pF                      |

## Transfer Characteristics

Apply over all recommended conditions ( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$  unless otherwise specified).

All typical values are measured at  $T_A = 25^\circ\text{C}$ .

| Symbol          | Parameter                                               | Device    | Conditions                                                                 | Min. | Typ. | Max. | Units |
|-----------------|---------------------------------------------------------|-----------|----------------------------------------------------------------------------|------|------|------|-------|
| $CTR_{CE}$      | Current Transfer Ratio<br>(Collector-Emitter)           | FODM8801A | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$<br>@ $T_A = 25^\circ\text{C}$   | 80   | 120  | 160  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 35   | 120  | 230  | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 5\text{ V}$                                 | 40   | 125  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 45   | 138  |      | %     |
|                 |                                                         | FODM8801B | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$<br>@ $T_A = 25^\circ\text{C}$   | 130  | 195  | 260  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 65   | 195  | 360  | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 5\text{ V}$                                 | 70   | 202  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 75   | 215  |      | %     |
|                 |                                                         | FODM8801C | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$<br>@ $T_A = 25^\circ\text{C}$   | 200  | 300  | 400  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 100  | 300  | 560  | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 5\text{ V}$                                 | 110  | 312  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 5\text{ V}$                                 | 115  | 330  |      | %     |
| $CTR_{CE(SAT)}$ | Saturated Current Transfer Ratio<br>(Collector-Emitter) | FODM8801A | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$<br>@ $T_A = 25^\circ\text{C}$ | 65   | 108  | 150  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 30   | 108  |      | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 25   | 104  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 20   | 92   |      | %     |
|                 |                                                         | FODM8801B | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$<br>@ $T_A = 25^\circ\text{C}$ | 90   | 168  | 245  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 45   | 168  |      | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 40   | 155  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 35   | 132  |      | %     |
|                 |                                                         | FODM8801C | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$<br>@ $T_A = 25^\circ\text{C}$ | 140  | 238  | 380  | %     |
|                 |                                                         |           | $I_F = 1.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 75   | 238  |      | %     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 65   | 215  |      | %     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, V_{CE} = 0.4\text{ V}$                               | 55   | 177  |      | %     |
| $V_{CE(SAT)}$   | Saturation Voltage                                      | FODM8801A | $I_F = 1.0\text{ mA}, I_C = 0.3\text{ mA}$                                 |      | 0.17 | 0.40 | V     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, I_C = 0.4\text{ mA}$                                 |      | 0.16 | 0.40 | V     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, I_C = 0.6\text{ mA}$                                 |      | 0.15 | 0.40 | V     |
|                 |                                                         | FODM8801B | $I_F = 1.0\text{ mA}, I_C = 0.45\text{ mA}$                                |      | 0.17 | 0.40 | V     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, I_C = 0.6\text{ mA}$                                 |      | 0.16 | 0.40 | V     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, I_C = 1.0\text{ mA}$                                 |      | 0.16 | 0.40 | V     |
|                 |                                                         | FODM8801C | $I_F = 1.0\text{ mA}, I_C = 0.75\text{ mA}$                                |      | 0.18 | 0.40 | V     |
|                 |                                                         |           | $I_F = 1.6\text{ mA}, I_C = 1.0\text{ mA}$                                 |      | 0.17 | 0.40 | V     |
|                 |                                                         |           | $I_F = 3.0\text{ mA}, I_C = 1.6\text{ mA}$                                 |      | 0.17 | 0.40 | V     |

## Switching Characteristics

Apply over all recommended conditions ( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$  unless otherwise specified).

All typical values are measured at  $T_A = 25^\circ\text{C}$ .

| Symbol           | Parameter                                                                 | Device      | Conditions                                                                                                                                                        | Min. | Typ. | Max. | Units                     |
|------------------|---------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------------------|
| $t_{\text{ON}}$  | Turn-On Time                                                              | All Devices | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 0.75\text{ k}\Omega$                                                                             | 1    | 6    | 20   | $\mu\text{s}$             |
|                  |                                                                           |             | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 4.7\text{ k}\Omega$                                                                              |      | 6    |      | $\mu\text{s}$             |
| $t_{\text{OFF}}$ | Turn-Off Time                                                             | All Devices | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 0.75\text{ k}\Omega$                                                                             | 1    | 6    | 20   | $\mu\text{s}$             |
|                  |                                                                           |             | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 4.7\text{ k}\Omega$                                                                              |      | 40   |      | $\mu\text{s}$             |
| $t_R$            | Output Rise Time<br>(10% to 90%)                                          | All Devices | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 0.75\text{ k}\Omega$                                                                             |      | 5    |      | $\mu\text{s}$             |
| $t_F$            | Output Fall Time<br>(90% to 10%)                                          | All Devices | $I_F = 1.6\text{ mA}$ , $V_{\text{CC}} = 5\text{ V}$ ,<br>$R_L = 0.75\text{ k}\Omega$                                                                             |      | 5.5  |      | $\mu\text{s}$             |
| $\text{CM}_H$    | Common-Mode<br>Rejection Voltage<br>(Transient Immunity) –<br>Output High | All Devices | $T_A = 25^\circ\text{C}$ , $I_F = 0\text{ mA}$ ,<br>$V_O > 2.0\text{ V}$ , $R_L = 4.7\text{ k}\Omega$ ,<br>$V_{\text{CM}} = 1000\text{ V}^{(6)}$ ,<br>Figure 16   |      | 20   |      | $\text{kV} / \mu\text{s}$ |
| $\text{CM}_L$    | Common-Mode<br>Rejection Voltage<br>(Transient Immunity) –<br>Output Low  | All Devices | $T_A = 25^\circ\text{C}$ , $I_F = 1.6\text{ mA}$ ,<br>$V_O < 0.8\text{ V}$ , $R_L = 4.7\text{ k}\Omega$ ,<br>$V_{\text{CM}} = 1000\text{ V}^{(6)}$ ,<br>Figure 16 |      | 20   |      | $\text{kV} / \mu\text{s}$ |

### Note:

6. Common-mode transient immunity at output high is the maximum tolerable positive  $dV_{\text{CM}}/dt$  on the leading edge of the common-mode impulse signal,  $V_{\text{CM}}$ , to assure that the output remains high.

## Typical Performance Curves

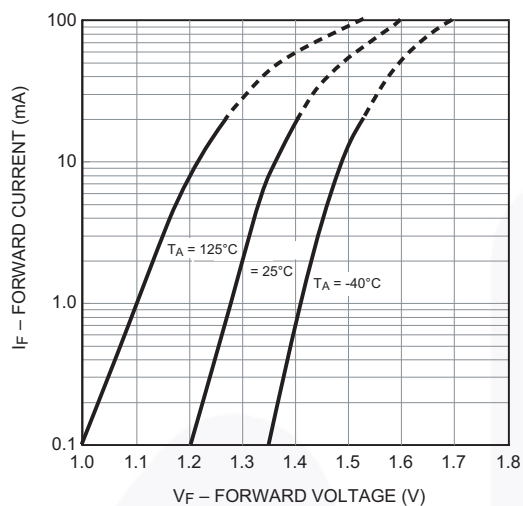


Figure 3. Forward Current vs. Forward Voltage

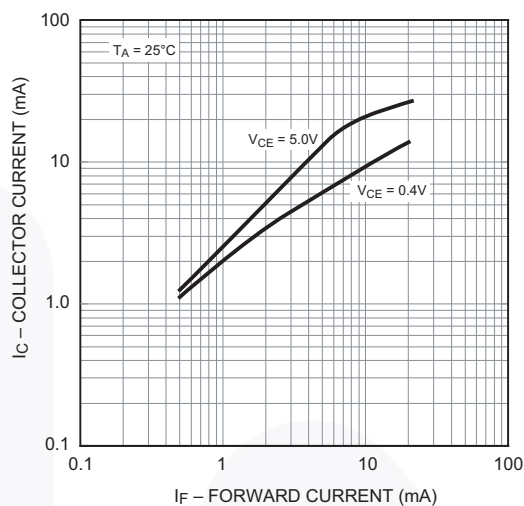


Figure 4. Collector Current vs. Forward Current

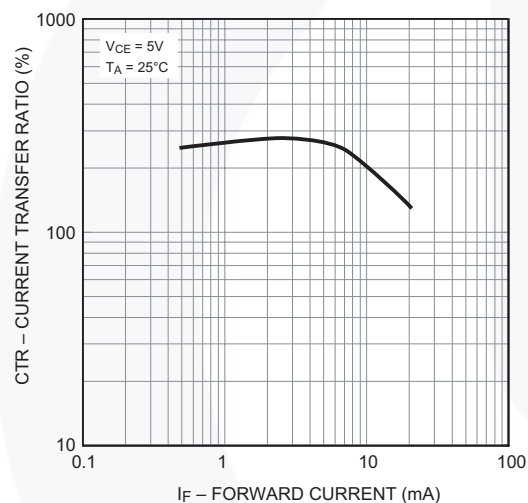


Figure 5. Current Transfer Ratio vs. Forward Current

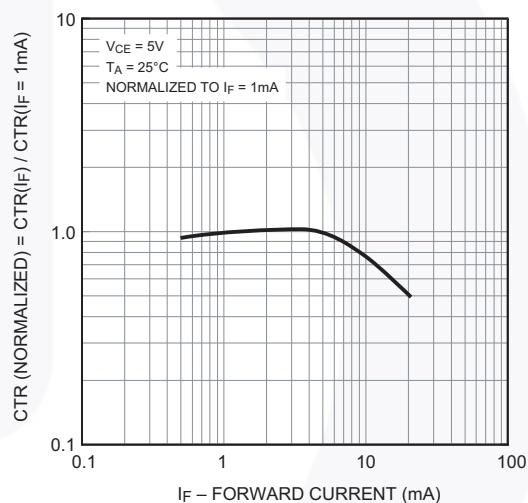


Figure 6. Normalized CTR vs. Forward Current

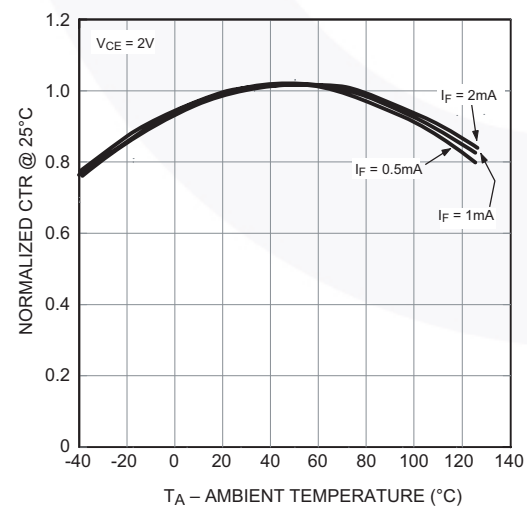


Figure 7. Normalized CTR vs. Ambient Temperature



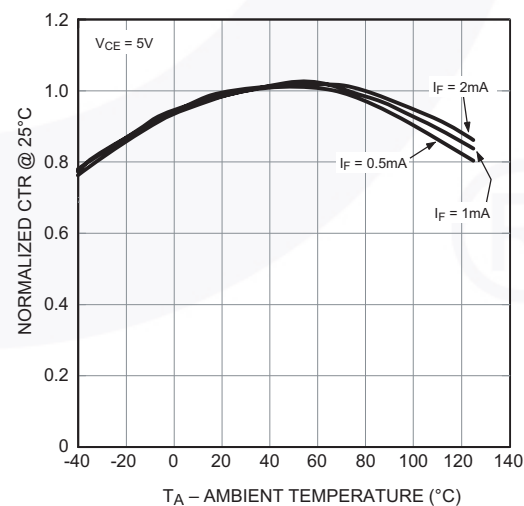


Figure 8. Normalized CTR vs. Ambient Temperature


## Typical Performance Curves (Continued)

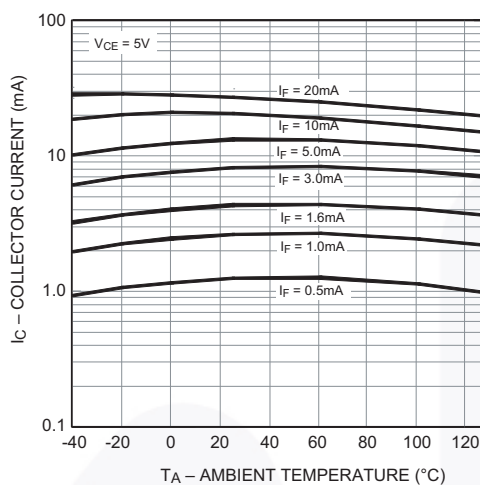


**Figure 9. Collector Current vs. Ambient Temperature**

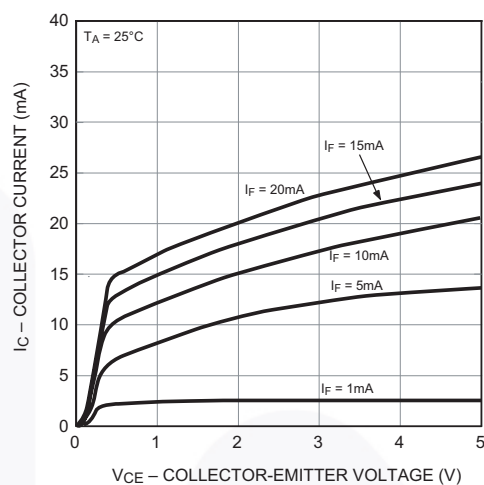


**Figure 10. Collector Current vs. Collector-Emitter Voltage**

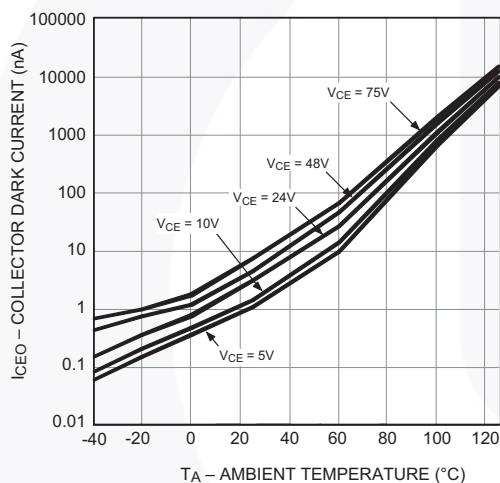


**Figure 11. Collector Dark Current vs. Ambient Temperature**

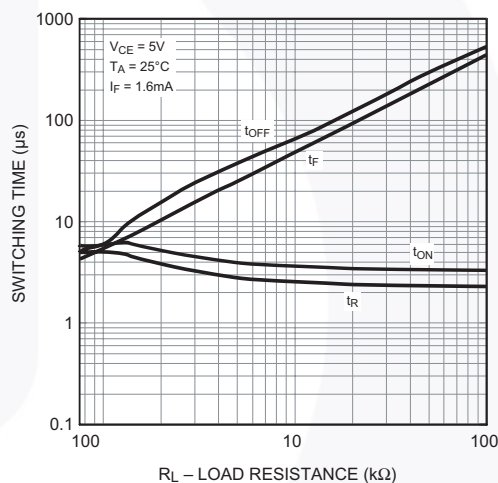

**Figure 12. Switching Time vs. Load Resistance**

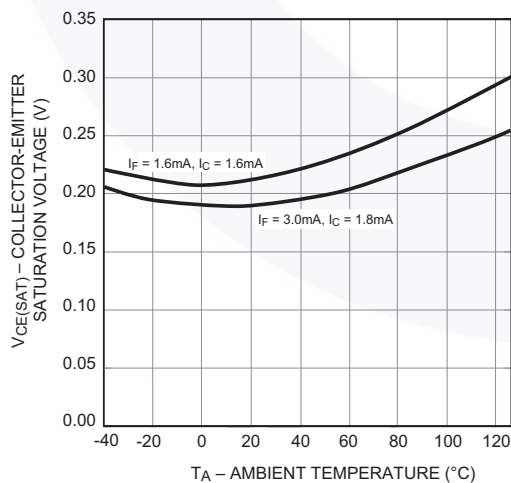

**Figure 13. Collector-Emitter Saturation Voltage vs. Ambient Temperature**

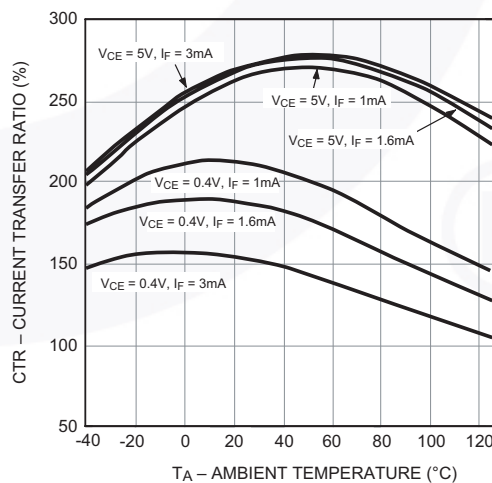

**Figure 14. Current Transfer Ratio vs. Ambient Temperature**

## Test Circuits

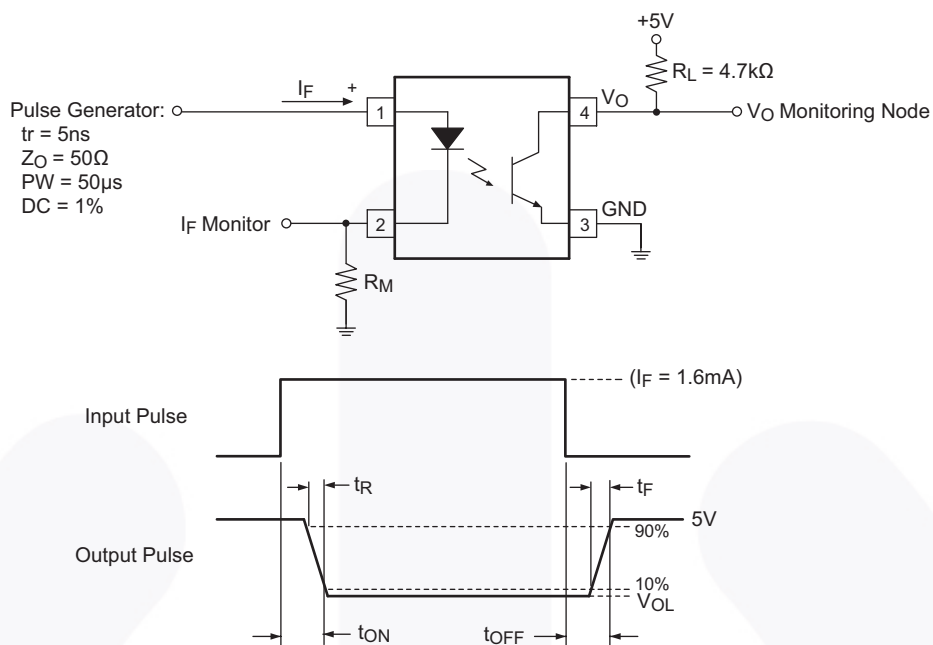


Figure 15. Test Circuit for Propagation Delay, Rise Time, and Fall Time





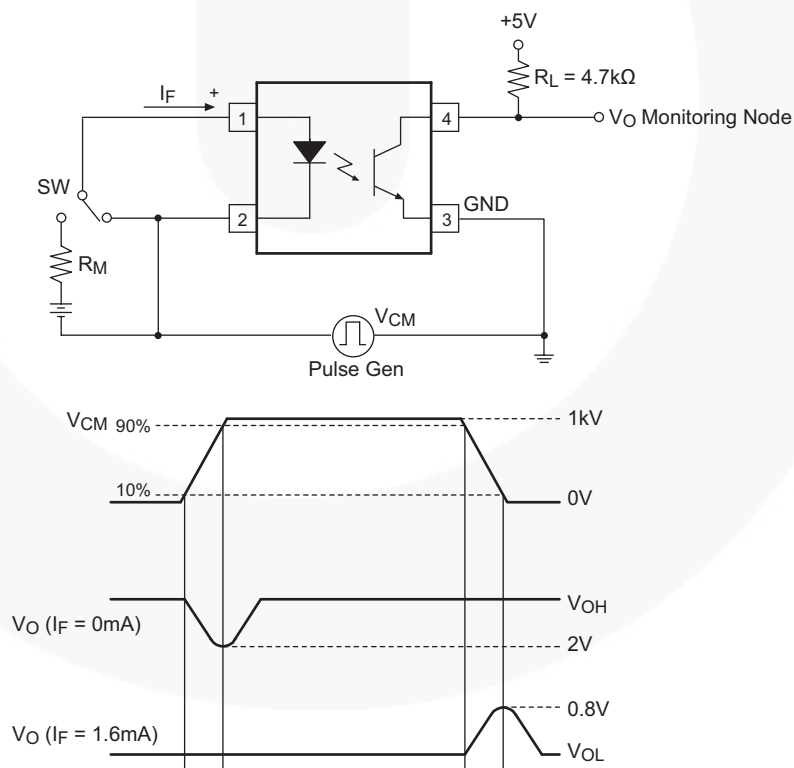


Figure 16. Test Circuit for Instantaneous Common-Mode Rejection Voltage

## Package Dimensions

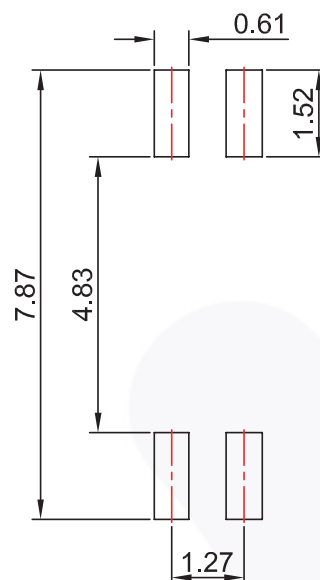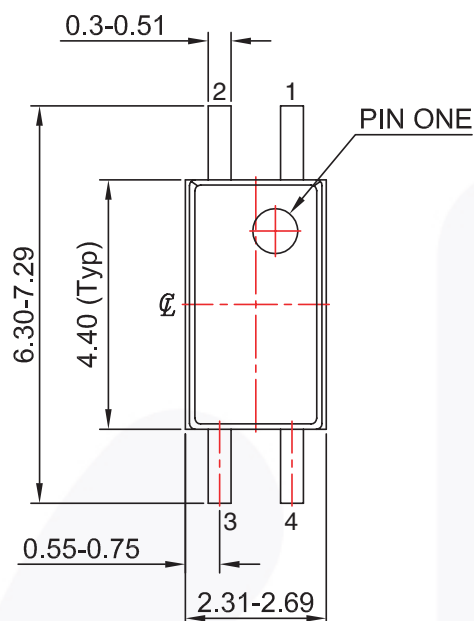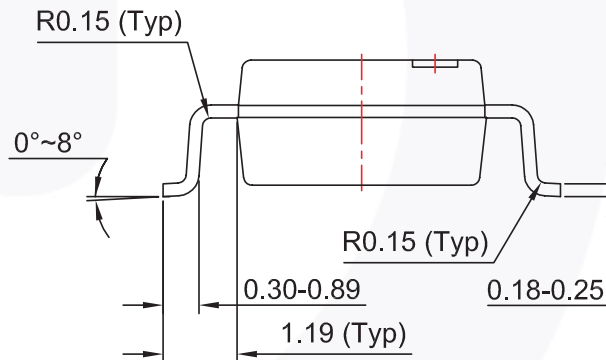

## LAND PATTERN RECOMMENDATION

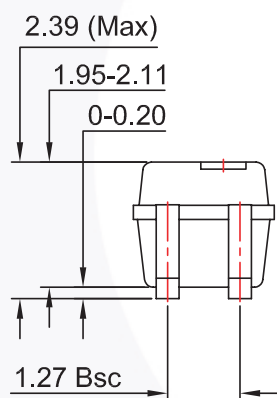

## NOTES:

- A) NO STANDARD APPLIES TO THIS PACKAGE
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVSION : MKT-MFP04AREV2.

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>.


## Ordering Information

| Part Number    | Current Transfer Ratio (CTR %) Option, $I_F = 1\text{ mA}$ , $V_{CE} = 5\text{ V}$ |
|----------------|------------------------------------------------------------------------------------|
| FODM8801A      | 80% to 160%                                                                        |
| FODM8801B      | 130% to 260%                                                                       |
| FODM8801C      | 200% to 400%                                                                       |
| Packing Method |                                                                                    |
| FODM8801x      | Tube (100 units per tube)                                                          |
| FODM8801xR2    | Tape and Reel (2500 units per reel)                                                |
| FODM8801xV     | Tube (100 units per tube), DIN/EN IEC60747-5-5                                     |
| FODM8801xR2V   | Tape and Reel (2500 units per reel), DIN/EN IEC60747-5-5                           |

 All packages are lead free per JEDEC: J-STD-020B standard.


“x” denotes the Current Transfer Ratio option. For example, FODM8801AR2 is a phototransistor with 80% to 160% CTR in tape and reel packaging.

## Marking Information

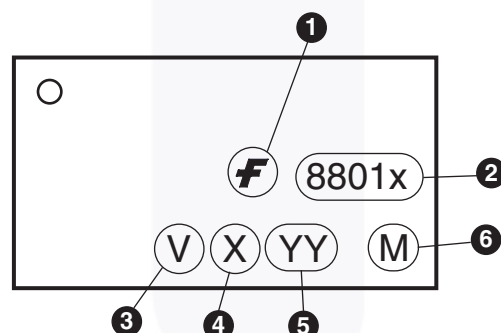


| Definitions |                                                                                                        |
|-------------|--------------------------------------------------------------------------------------------------------|
| 1           | Fairchild logo                                                                                         |
| 2           | Device number, 'x' denotes CTR% option (A, B, or C)                                                    |
| 3           | VDE mark (Note: Only appears on parts ordered with DIN/EN IEC60747-5-5 option – See order entry table) |
| 4           | One-digit year code, e.g., '1' represents the year 2011                                                |
| 5           | Two-digit work week ranging from '01' to '53'                                                          |
| 6           | Assembly package code                                                                                  |

## Tape and Reel Dimensions

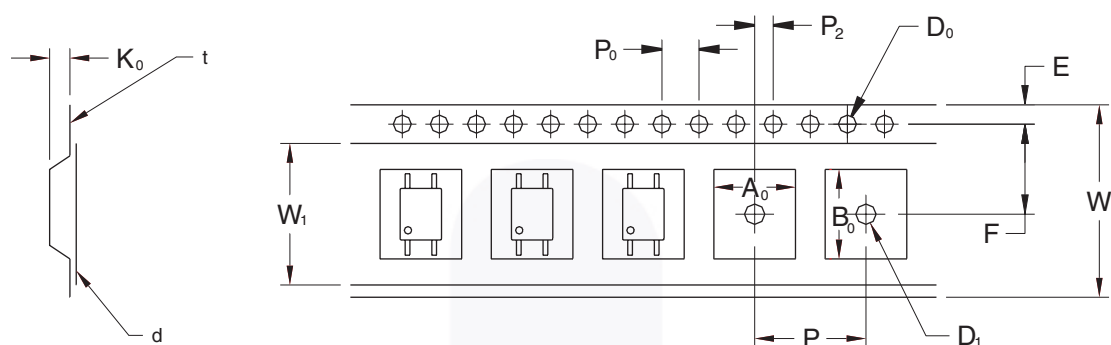

|                                 |                | 1.27 Pitch        |
|---------------------------------|----------------|-------------------|
| Description                     | Symbol         | Dimensions (mm)   |
| Tape Width                      | W              | 12.00 +0.30/-0.10 |
| Tape Thickness                  | t              | 0.30 ±0.05        |
| Sprocket Hole Pitch             | P <sub>0</sub> | 4.00 ±0.10        |
| Sprocket Hole Diameter          | D <sub>0</sub> | 1.50 +0.10/-0.0   |
| Sprocket Hole Location          | E              | 1.75 ±0.10        |
| Pocket Location                 | F              | 5.50 ±0.10        |
|                                 | P <sub>2</sub> | 2.00 ±0.10        |
| Pocket Pitch                    | P              | 8.00 ±0.10        |
| Pocket Dimension                | A <sub>0</sub> | 2.80 ±0.10        |
|                                 | B <sub>0</sub> | 7.30 ±0.10        |
|                                 | K <sub>0</sub> | 2.30 ±0.10        |
| Pocket Hole Diameter            | D <sub>1</sub> | 1.50 Min.         |
| Cover Tape Width                | W <sub>1</sub> | 9.20              |
| Cover Tape Thickness            | d              | 0.065 ±0.010      |
| Max. Component Rotation or Tilt |                | 10° Max.          |
| Devices Per Reel                |                | 2500              |
| Reel Diameter                   |                | 330 mm (13")      |

## Reflow Profile

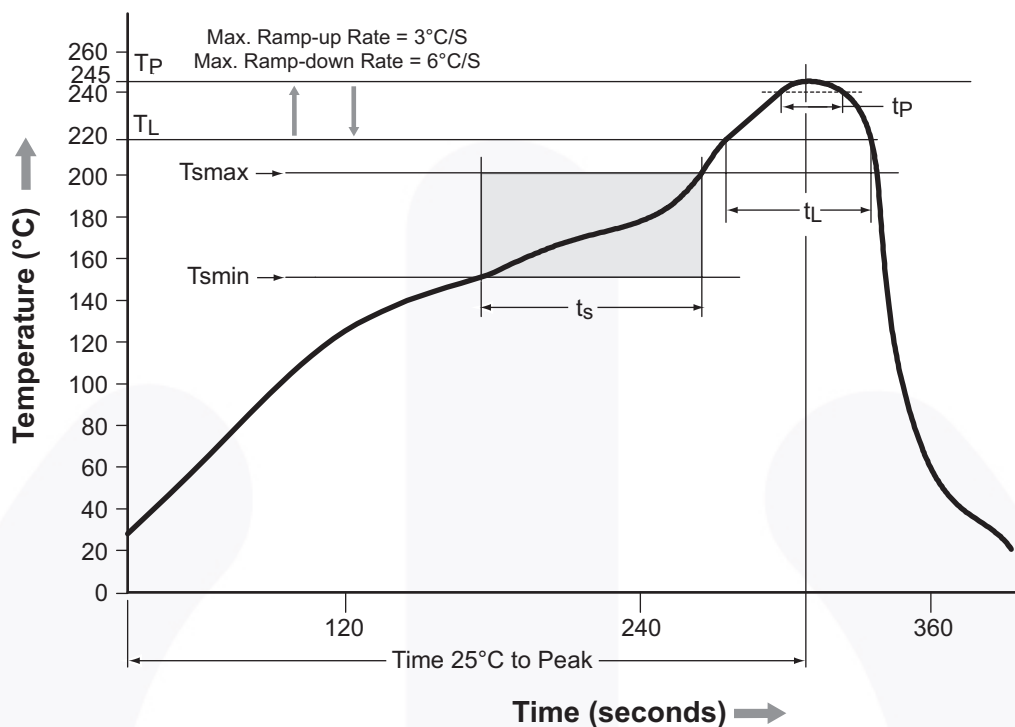

| Profile Feature                                  | Pb-Free Assembly Profile |
|--------------------------------------------------|--------------------------|
| Temperature Min. ( $T_{smin}$ )                  | 150°C                    |
| Temperature Max. ( $T_{smax}$ )                  | 200°C                    |
| Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ ) | 60–120 seconds           |
| Ramp-up Rate ( $t_L$ to $t_p$ )                  | 3°C/second max.          |
| Liquidous Temperature ( $T_L$ )                  | 217°C                    |
| Time ( $t_L$ ) Maintained Above ( $T_L$ )        | 60–150 seconds           |
| Peak Body Package Temperature                    | 245°C +0°C / -5°C        |
| Time ( $t_p$ ) within 5°C of 260°C               | 30 seconds               |
| Ramp-down Rate ( $T_P$ to $T_L$ )                | 6°C/second max.          |
| Time 25°C to Peak Temperature                    | 8 minutes max.           |

Figure 17. Reflow Profile



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                   |                                                |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2Cool™                                                                            | FPS™                                           |  | Sync-Lock™                                                                          |
| AccuPower™                                                                        | F-PFS™                                         | PowerTrench®                                                                      |  |
| AX-CAP®*                                                                          | FRFET®                                         | PowerXS™                                                                          | TinyBoost™                                                                          |
| BitSiC™                                                                           | Global Power Resource™                         | Programmable Active Droop™                                                        | TinyBuck™                                                                           |
| Build it Now™                                                                     | GreenBridge™                                   | QFET®                                                                             | TinyCalc™                                                                           |
| CorePLUS™                                                                         | Green FPS™                                     | QS™                                                                               | TinyLogic®                                                                          |
| CorePOWER™                                                                        | Green FPS™ e-Series™                           | Quiet Series™                                                                     | TINYOPTO™                                                                           |
| CROSSVOLT™                                                                        | Gmax™                                          | RapidConfigure™                                                                   | TinyPower™                                                                          |
| CTL™                                                                              | GTO™                                           |  | TinyPWM™                                                                            |
| Current Transfer Logic™                                                           | IntelliMAX™                                    | Saving our world, 1mW/W/kW at a time™                                             | TinyWire™                                                                           |
| DEUXPEED®                                                                         | ISOPLANAR™                                     | SignalWise™                                                                       | TranSiC™                                                                            |
| Dual Cool™                                                                        | Making Small Speakers Sound Louder and Better™ | SmartMax™                                                                         | TriFault Detect™                                                                    |
| EcoSPARK®                                                                         | MegaBuck™                                      | SMART START™                                                                      | TRUECURRENT®*                                                                       |
| EfficientMax™                                                                     | MICROCOUPLER™                                  | Solutions for Your Success™                                                       | µSerDes™                                                                            |
| ESBC™                                                                             | MicroFET™                                      | SPM®                                                                              |  |
|  | MicroPak™                                      | STEALTH™                                                                          | UHC®                                                                                |
| Fairchild®                                                                        | MicroPak2™                                     | SuperFET®                                                                         | Ultra FRFET™                                                                        |
| Fairchild Semiconductor®                                                          | MillerDrive™                                   | SuperSOT™-3                                                                       | UniFET™                                                                             |
| FACT Quiet Series™                                                                | MotionMax™                                     | SuperSOT™-6                                                                       | VCX™                                                                                |
| FACT®                                                                             | mWSaver™                                       | SuperSOT™-8                                                                       | VisualMax™                                                                          |
| FAST®                                                                             | OptoHiT™                                       | SupreMOS®                                                                         | VoltagePlus™                                                                        |
| FastvCore™                                                                        | OPTOLOGIC®                                     | SyncFET™                                                                          | XS™                                                                                 |
| FETBench™                                                                         | OPTOPLANAR®                                    |                                                                                   |                                                                                     |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I64

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com