

## MITI-3V1 Features and Benefits



### Features

- Ultra-miniature normally open switch with 7.00mm x 1.80mm (0.276" x 0.071") glass envelope
- Capable of switching 170Vdc at up to 10 Watts
- $10^{12}$  Ohms insulation resistance
- Available sensitivity range 6-10 AT
- Surface mount version available


### Benefits

- Hermetically sealed switch contacts are not effected by and have no effect on their external environment
- Low, stable contact resistance
- Very low space requirement
- Zero operating power required for contact closure
- Fit and forget durability

### Applications

- Reed relays
- Security
- Metering
- Mobile phones

## DIMENSIONS (in) mm

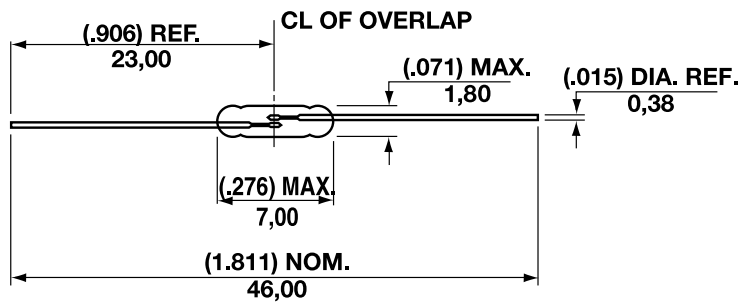

Switch Type		MITI-3V1
Contact Form		A

### ELECTRICAL RATINGS

Contact Rating (1)		Watt - max.	10
Voltage	Switching	Vdc - max.	170
	Breakdown	Vdc - min.	175
Current	Switching	A - max.	0.25
	Carry	A - max.	0.5
Resistance	Contact, Initial	$\Omega$ - max.	0.15
	Insulation	$\Omega$ - min.	$10^{12}$
Capacitance	Contact	pF - typ.	0.3
Temperature	Operating	$^{\circ}\text{C}$	-40 to +125
	Storage (5)	$^{\circ}\text{C}$	-65 to +125

### OPERATING CHARACTERISTICS

Operate Time (2)		ms - max.	0.45
Release Time (2)		ms - max.	0.2
Shock	11ms ½ sine wave	G - max.	150
Vibration	50-2000 Hertz	G - max.	30
Resonant Frequency		Hz - typ.	18000

### MAGNETIC CHARACTERISTICS


Pull-In Range (3)		Ampere Turns	6-10
Rating Sensitivity (4)		Ampere Turns	12
Test Coil			L4991

- Notes
- 1) Contact rating-Product of the switching voltage and current should never exceed the wattage rating. Contact Hamlin for additional load/life information.
  - 2) Operate (inc. bounce) /Release Time-per BA/NARM RS421A, diode suppressed coil.
  - 3) Pull in Range-Contact Hamlin for tolerances available within this range.
  - 4) Rating Sensitivity-The value at which contact ratings and operating characteristics are

- 5) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
 Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com  
 Hamlin China Tel: +86 (0) 512 69365 800 • Fax: +86 (0) 512 69365 811 • Email: sales.cn@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSE ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is applied. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorized representatives of HAMLIN.



# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)