


**HiPerFRED<sup>2</sup>**

$$\begin{aligned}
 V_{RRM} &= 2 \times 400 \text{ V} \\
 I_{FAV} &= 10 \text{ A} \\
 t_{rr} &= 45 \text{ ns}
 \end{aligned}$$

High Performance Fast Recovery Diode  
 Low Loss and Soft Recovery  
 Phase leg


Part number

**DPG10P400PJ**



Backside: isolated

 E72873

**Features / Advantages:**

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low  $I_{rm}$ -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low  $I_{rm}$  reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

**Applications:**


- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

**Package: ISOPLUS220**

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Soldering pins for PCB mounting
- Backside: DCB ceramic
- Reduced weight
- Advanced power cycling

| Fast Diode |                                              |                                                                                  |                                | Ratings                        |      |      |               |
|------------|----------------------------------------------|----------------------------------------------------------------------------------|--------------------------------|--------------------------------|------|------|---------------|
| Symbol     | Definition                                   | Conditions                                                                       |                                | min.                           | typ. | max. | Unit          |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                                                    |                                |                                |      | 400  | V             |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                                                    |                                |                                |      | 400  | V             |
| $I_R$      | reverse current, drain current               | $V_R = 400\text{ V}$                                                             | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1    | $\mu\text{A}$ |
|            |                                              | $V_R = 400\text{ V}$                                                             | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 0.18 | mA            |
| $V_F$      | forward voltage drop                         | $I_F = 10\text{ A}$                                                              | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1.28 | V             |
|            |                                              | $I_F = 20\text{ A}$                                                              |                                |                                |      | 1.48 | V             |
|            |                                              | $I_F = 10\text{ A}$                                                              | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 1.02 | V             |
|            |                                              | $I_F = 20\text{ A}$                                                              |                                |                                |      | 1.24 | V             |
| $I_{FAV}$  | average forward current                      | $T_C = 145^{\circ}\text{C}$<br>rectangular $d = 0.5$                             | $T_{VJ} = 175^{\circ}\text{C}$ |                                |      | 10   | A             |
| $V_{FO}$   | threshold voltage                            | } for power loss calculation only                                                |                                | $T_{VJ} = 175^{\circ}\text{C}$ |      | 0.78 | V             |
| $r_F$      | slope resistance                             |                                                                                  |                                |                                |      | 19.4 | m $\Omega$    |
| $R_{thJC}$ | thermal resistance junction to case          |                                                                                  |                                |                                |      | 2.5  | K/W           |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                                                                  |                                |                                | 0.50 |      | K/W           |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                                                       |                                |                                |      | 60   | W             |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$               | $T_{VJ} = 45^{\circ}\text{C}$  |                                |      | 130  | A             |
| $C_J$      | junction capacitance                         | $V_R = 200\text{ V}$ $f = 1\text{ MHz}$                                          | $T_{VJ} = 25^{\circ}\text{C}$  |                                | 16   |      | pF            |
| $I_{RM}$   | max. reverse recovery current                | $I_F = 15\text{ A}; V_R = 270\text{ V}$<br>$-di_F/dt = 200\text{ A}/\mu\text{s}$ |                                | $T_{VJ} = 25^{\circ}\text{C}$  |      | 4    | A             |
|            |                                              |                                                                                  |                                | $T_{VJ} = 125^{\circ}\text{C}$ |      | 5.5  | A             |
|            |                                              |                                                                                  |                                | $T_{VJ} = 25^{\circ}\text{C}$  |      | 45   | ns            |
|            |                                              |                                                                                  |                                | $T_{VJ} = 125^{\circ}\text{C}$ |      | 70   | ns            |
| $t_{rr}$   | reverse recovery time                        |                                                                                  |                                |                                |      |      |               |

| Package ISOPLUS220 |                                                              |                      | Ratings |      |      |      |
|--------------------|--------------------------------------------------------------|----------------------|---------|------|------|------|
| Symbol             | Definition                                                   | Conditions           | min.    | typ. | max. | Unit |
| $I_{RMS}$          | RMS current                                                  | per terminal         |         |      | 35   | A    |
| $T_{VJ}$           | virtual junction temperature                                 |                      | -55     |      | 175  | °C   |
| $T_{op}$           | operation temperature                                        |                      | -55     |      | 150  | °C   |
| $T_{stg}$          | storage temperature                                          |                      | -55     |      | 150  | °C   |
| Weight             |                                                              |                      |         | 2    |      | g    |
| $F_c$              | mounting force with clip                                     |                      | 20      |      | 60   | N    |
| $d_{Spp/App}$      | creepage distance on surface   striking distance through air | terminal to terminal | 1.0     |      |      | mm   |
| $d_{Spb/Apb}$      |                                                              | terminal to backside | 3.0     |      |      | mm   |
| $V_{ISOL}$         | isolation voltage                                            | t = 1 second         | 3600    |      |      | V    |
|                    |                                                              | t = 1 minute         | 3000    |      |      | V    |

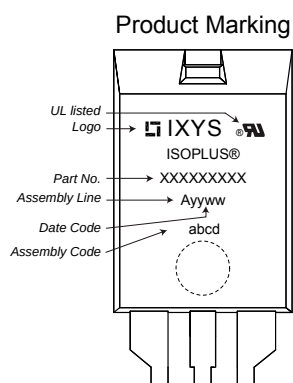

## Part number

D = Diode  
 P = HiPerFRED  
 G = extreme fast  
 10 = Current Rating [A]  
 P = Phase leg  
 400 = Reverse Voltage [V]  
 PJ = ISOPLUS220AB (3)

| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-------------|--------------------|---------------|----------|----------|
| Standard | DPG10P400PJ | DPG10P400PJ        | Tube          | 50       | 507202   |


## Equivalent Circuits for Simulation

\* on die level

 $T_{VJ} = 175^{\circ}\text{C}$ 

|             |                    |      |                   |    |
|-------------|--------------------|------|-------------------|----|
|             |                    |      | <b>Fast Diode</b> |    |
| $V_{0\max}$ | threshold voltage  | 0.78 |                   | V  |
| $R_{0\max}$ | slope resistance * | 16.2 |                   | mΩ |


## Outlines ISOPLUS220

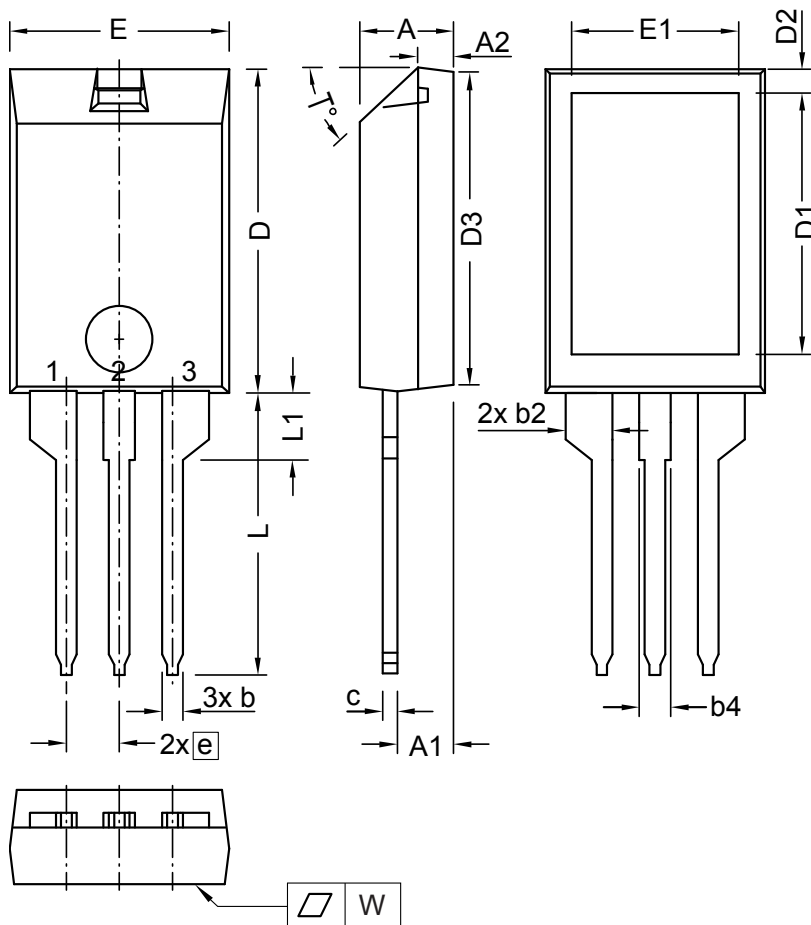

| Dim. | Millimeters |       | Inches    |       |
|------|-------------|-------|-----------|-------|
|      | min         | max   | min       | max   |
| A    | 4.00        | 5.00  | 0.157     | 0.197 |
| A1   | 2.50        | 3.00  | 0.098     | 0.118 |
| A2   | 1.60        | 1.80  | 0.063     | 0.071 |
| b    | 0.90        | 1.30  | 0.035     | 0.051 |
| b2   | 2.35        | 2.55  | 0.093     | 0.100 |
| b4   | 1.25        | 1.65  | 0.049     | 0.065 |
| c    | 0.70        | 1.00  | 0.028     | 0.039 |
| D    | 15.00       | 16.00 | 0.591     | 0.630 |
| D1   | 12.00       | 13.00 | 0.472     | 0.512 |
| D2   | 1.10        | 1.50  | 0.043     | 0.059 |
| D3   | 14.90       | 15.50 | 0.587     | 0.610 |
| E    | 10.00       | 11.00 | 0.394     | 0.433 |
| E1   | 7.50        | 8.50  | 0.295     | 0.335 |
| e    | 2.54 BSC    |       | 0.100 BSC |       |
| L    | 13.00       | 14.50 | 0.512     | 0.571 |
| L1   | 3.00        | 3.50  | 0.118     | 0.138 |
| T°   | 42.5        | 47.5  |           |       |
| W    | -           | 0.1   | -         | 0.004 |

Die konvexe Form des Substrates ist typ. < 0.04 mm über der Kunststoffoberfläche der Bauteilunterseite  
The convex bow of substrate is typ. < 0.04 mm over plastic surface level of device bottom side

Die Gehäuseabmessungen entsprechen dem Typ TO-273 gemäß JEDEC außer D und D1.  
This drawing will meet all dimensions requirement of JEDEC outline TO-273 except D and D1.

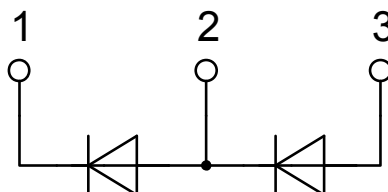

## Fast Diode

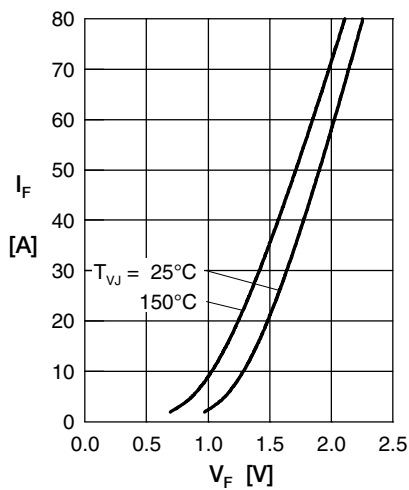


Fig. 1 Forward current  $I_F$  versus  $V_F$

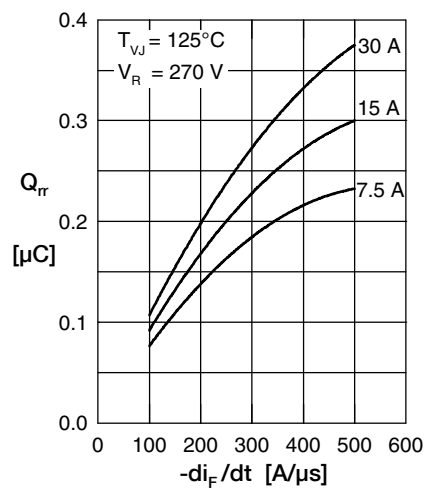


Fig. 2 Typ. reverse recov. charge  $Q_{rr}$  versus  $-di_F/dt$

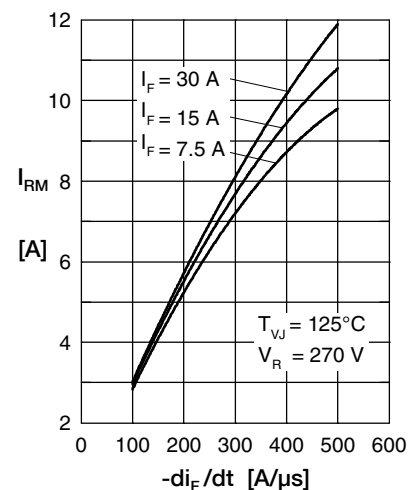


Fig. 3 Typ. peak reverse current  $I_{RM}$  versus  $-di_F/dt$

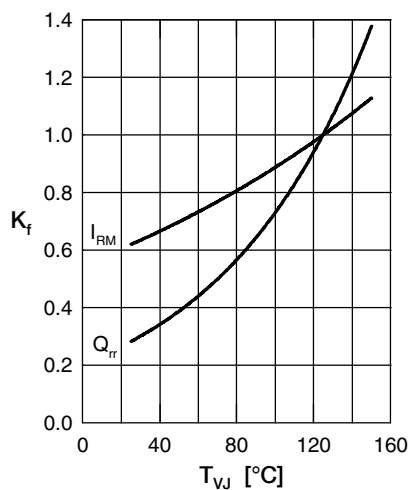


Fig. 4 Typ. dynamic parameters  $Q_{rr}$ ,  $I_{RM}$  versus  $T_{VJ}$

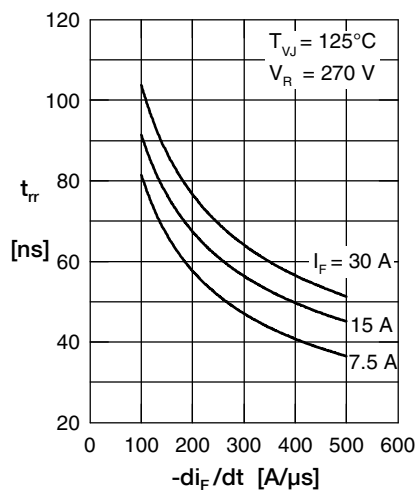


Fig. 5 Typ. recovery time  $t_{rr}$  versus  $-di_F/dt$

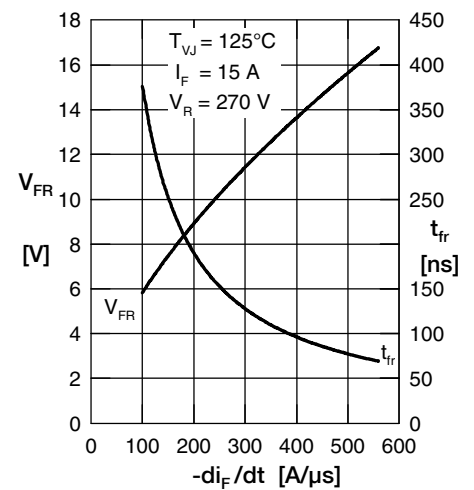


Fig. 6 Typ. peak forward voltage  $V_{FR}$  and  $t_{rr}$  versus  $di_F/dt$

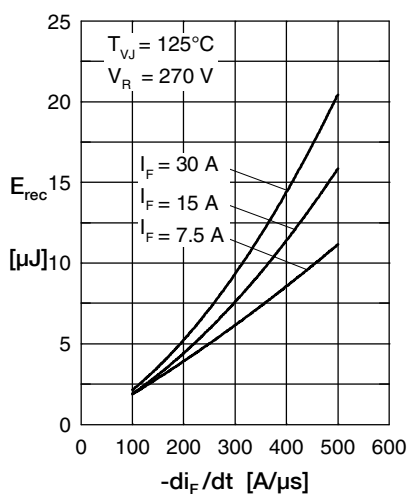


Fig. 7 Typ. recovery energy  $E_{rec}$  versus  $-di_F/dt$

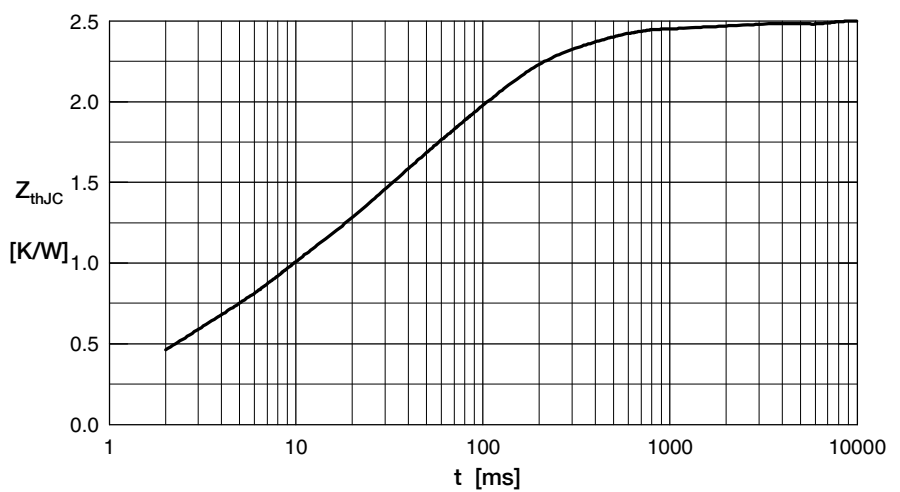


Fig. 8 Transient thermal resistance junction to case

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)