




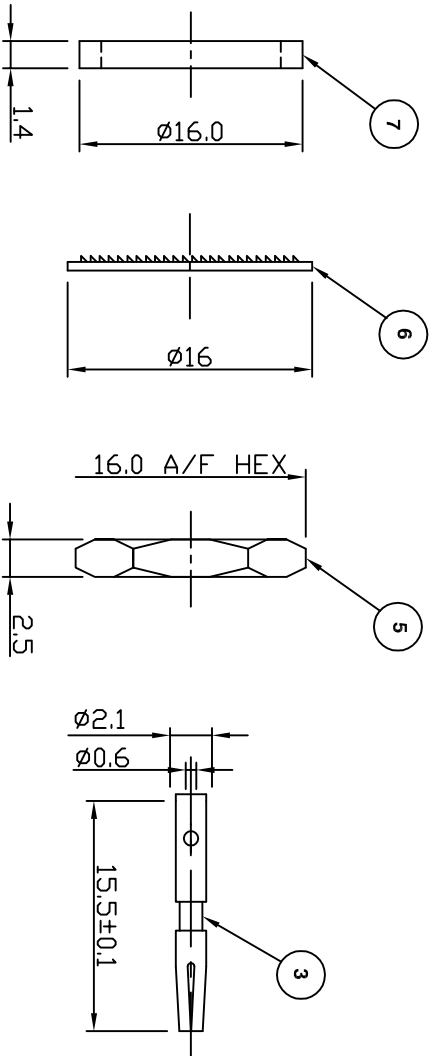

Panel Cutout Details

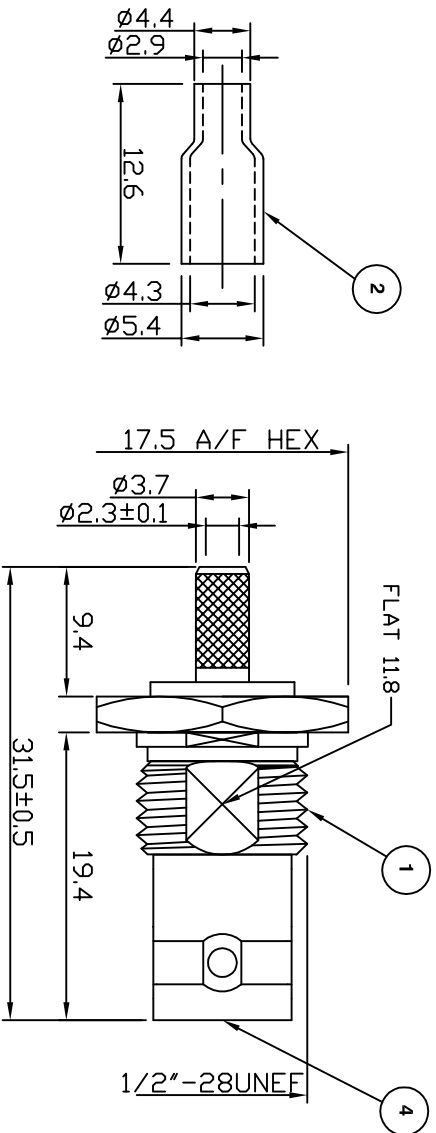

For stripping and assembly instructions see Drawing Number: VAIB4104



EMERSON
Network Power

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE:

TITLE:

BNC Bulkhead Crimp
Jack for RG174

PART NUMBER:

VB40-2071

PAGE: 1 of 1

Electrical Characteristics

Nominal Impedance: 50 ohms
Frequency Range: DC to 4 GHz
VSWR: 1.35:1 maximum
Insertion Loss: 0.2 dB at 3 GHz
Operating Voltage (rms): 500 V maximum at sea level
Dielectric Withstand Voltage (rms): 1500 V maximum at sea level
Contact Resistance: 1.5 milliohms maximum
Insulation Resistance: 5000 megohms minimum

Mechanical Characteristics

Mating Cycles: 500 cycles minimum
Interface Dimensions: Conform to MIL-C-39012

Environmental Characteristics

Temperature Range: -65 °C to +165 °C

PART	DESCRIPTION
1	Body
2	Ferrule
3	Contact
4	Dielectric
5	Nut
6	Washer
7	Gasket

Strip & Crimp Dims added	MS	6	24 Aug 09
Measurement update	KA	5	15 Aug 07
Insulator added, dimensions updated	JW	4	06 Jun 06
HEX Modification	SN	3	28 Jun 02
CAD Issue	SN	2	22 Jan 02
First Issue	YL	1	10 June 94
DESCRIPTION OF REVISION	APPVD	ISS	DATE

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com