


# Metric 4.5mm Hex Female Standoff

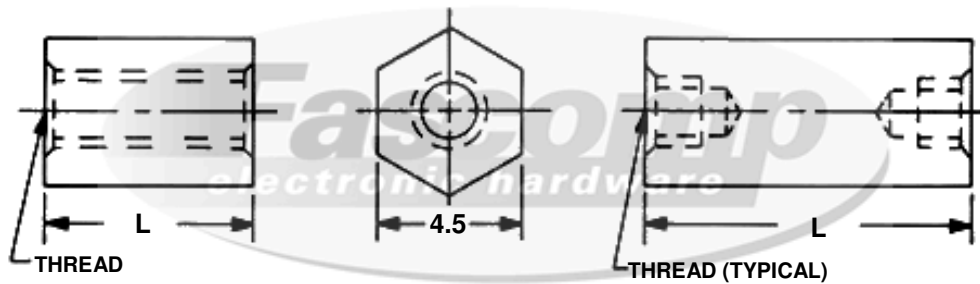

| Length Table |            |  |
|--------------|------------|--|
| ✓ FMXXXX     | Length (L) |  |
| FM1250       | 3          |  |
| FM1251       | 4          |  |
| FM1252       | 5          |  |
| FM1253       | 6          |  |
| FM1254       | 7          |  |
| FM1255       | 8          |  |
| FM1256       | 9          |  |
| FM1257       | 10         |  |
| FM1258       | 11         |  |
| FM1259       | 12         |  |
| FM1260       | 13         |  |
| FM1261       | 14         |  |
| FM1262       | 15         |  |
| FM1263       | 16         |  |
| FM1264       | 17         |  |
| FM1265       | 18         |  |
| FM1266       | 19         |  |
| FM1267       | 20         |  |
| FM1268       | 21         |  |
| FM1269       | 22         |  |
| FM1270       | 23         |  |
| FM1271       | 24         |  |
| FM1272       | 25         |  |
| FM1273       | 28         |  |
| FM1274       | 31         |  |
| FM1275       | 34         |  |
| FM1276       | 37         |  |
| FM1277       | 40         |  |
| FM1278       | 43         |  |
| FM1279       | 46         |  |
| FM1280       | 49         |  |
| FM1281       | 52         |  |

## Create a part number:

| Length                        | Thread | Material | Finish |
|-------------------------------|--------|----------|--------|
| FMXXXX                        | XXX    | XX       | XX     |
| _____ - _____ - _____ - _____ |        |          |        |

| Thread              |             |    |                 |  |
|---------------------|-------------|----|-----------------|--|
| ✓ Thread Code (XXX) | Tapped Thru |    | Longer Parts    |  |
|                     | A, B, S     | SS | Blind Tap Depth |  |
| 2545                | 19          | 16 | 4.7             |  |
| 3505                | 25          | 19 | 6.3             |  |

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

| Material             |                 |  |
|----------------------|-----------------|--|
| ✓ Material Code (XX) |                 |  |
| A                    | Aluminum        |  |
| B                    | Brass           |  |
| S                    | Steel           |  |
| SS                   | Stainless Steel |  |
| N                    | Nylon           |  |

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .13mm  
 .xx +/- .26mm  
 Angular +/- 1 Degree  
 Linear +/- .13mm  
**Break all sharp edges**

| Compatible Finish |                                                                          |  |
|-------------------|--------------------------------------------------------------------------|--|
| ✓ A, B, S, SS     | 0 - Plain                                                                |  |
| B, S              | 5 - Nickel Plate (QQ-N-290)                                              |  |
| A                 | 6 - Iridite #14 Gold (MIL-C-5541E)                                       |  |
| A                 | 7 - Iridite Clear (MIL-C-5541E)                                          |  |
| A                 | 9 - Alodine 1200                                                         |  |
| B, S              | 12 - Zinc Clear (ASTM-B-633)                                             |  |
| B, S              | 16 - Electro Tin (MIL-T-10727 TYPE 1)                                    |  |
| SS                | 20 - Passivation (MIL-F-14072D)                                          |  |
| A                 | 22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear) |  |
| A                 | 24 - Black Anodize (MIL-A-8625)                                          |  |
| B, S, SS          | 26 - Black Oxide                                                         |  |
| B, S              | 28 - Zinc Yellow (ASTM-B-633)                                            |  |



Fascomp Electronic Hardware  
 7814 Kingspointe Pkwy  
 Orlando, FL 32819  
 www.fascomp.com  
 Tel: (407) 226-2112  
 Fax: (407) 226-3370

Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com