





SIZE	Part Number	Jack Screw Thread	Packing
25	8655MH2501LF	UNC 4-40	bulk : Qty 60
	8655MH2511LF		individual set 50 sets/carton
	8655MH2502LF	M3	bulk : Qty 60
	8655MH2512LF		individual set 50 sets/carton

NOTE:RoHS INFORMATIONS

-The LF product meets European union Directives and other country regulations as described in GS-22-009

-The product is not intended to be exposed to a manufaturing solder process

-Packaging spec:see GS-14-920

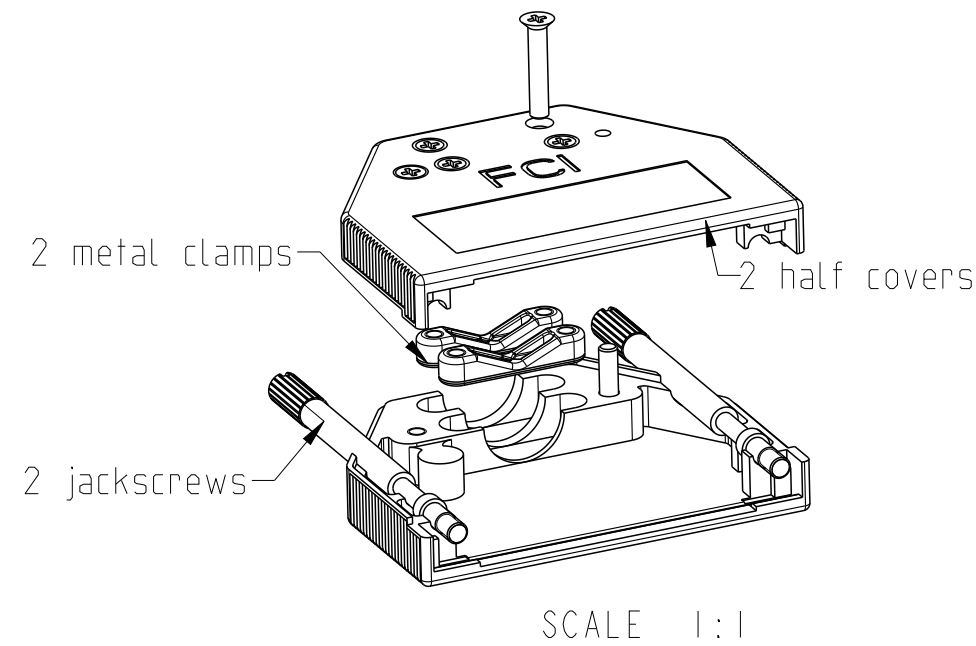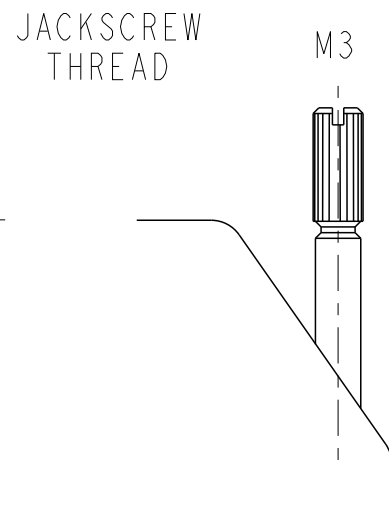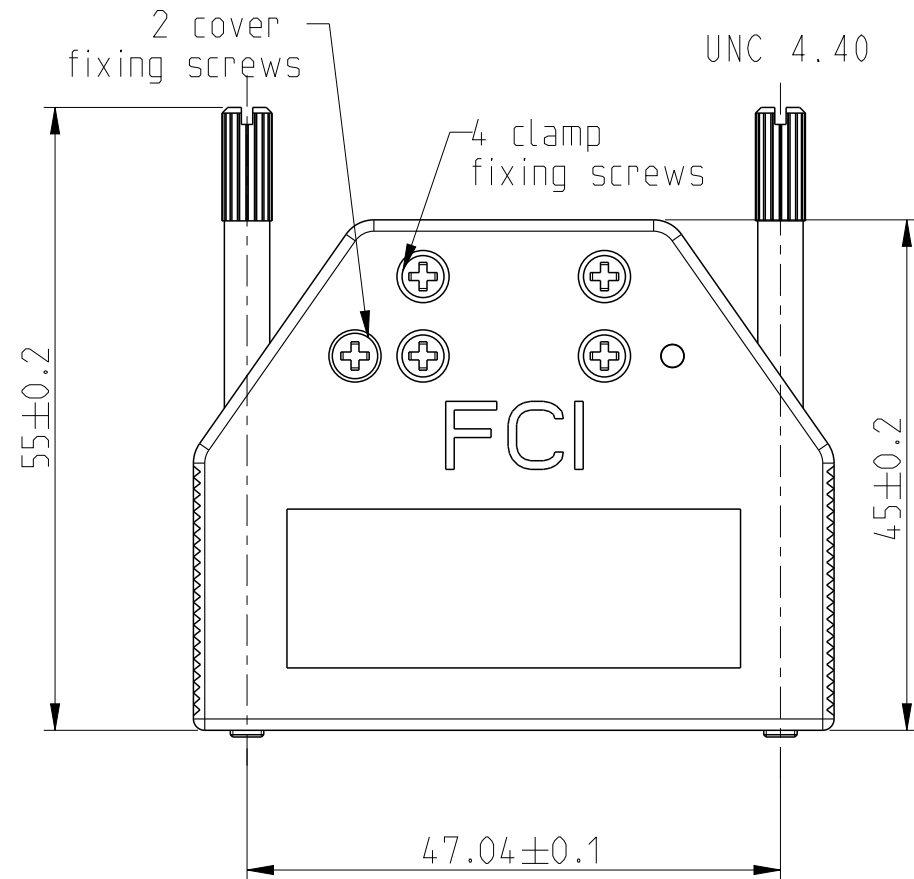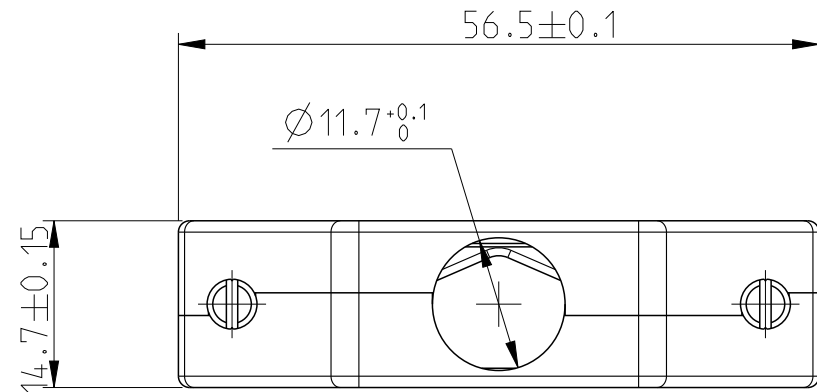

NOTES : for every sizes

Material and finish : Zinc die-cast
nickel plated


Cable strain relief : Zinc die-cast

Jackscrew : Brass, nickel plated
UNC 4-40 or M3 (see tables)

Temperature range : -55°C to +125 °C




Attenuation factor : >40 dB between 10 MHz

Other size details : see on next pages.


TOLERANCES UNLESS OTHERWISE SPECIFIED			tolerance std	dr	A Parrenin	2009/05/20	projection		size	A3	scale	3:2				
linear	X.	±/		ISO 406	eng	A Parrenin			2014/06/09		ecn no	ELX-B-17874-1				
	0.X	±/ <th>ISO 1101</th> <th>chr</th> <th>A Parrenin</th> <th>2014/06/09</th> <th rowspan="3">product family</th> <th rowspan="3">-</th> <th colspan="3">rel level</th> <th>Released</th>	ISO 1101	chr	A Parrenin	2014/06/09	product family	-	rel level			Released				
	0.XX	±/	surface - 		title	STRAIGHT METAL HOODS WITH 2 METAL CLAMPS			dwg no	C-8655-1685C			rev	C		
	0.XXX	±/														
	0.XXXX	±/														
angular	0°	±/° A	302	www.fci.com	cat. no.	-	Product - Customer Drw			sheet 1 of 4						



SIZE	Part Number	Jack Screw Thread	Packing
09	8655MH0901LF	UNC 4-40	bulk : Qty 80
	8655MH0911LF		individual set 50 sets/carton
	8655MH0902LF	M3	bulk : Qty 80
	8655MH0912LF		individual set 50 sets/carton

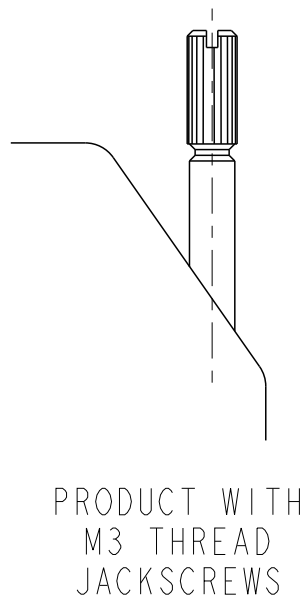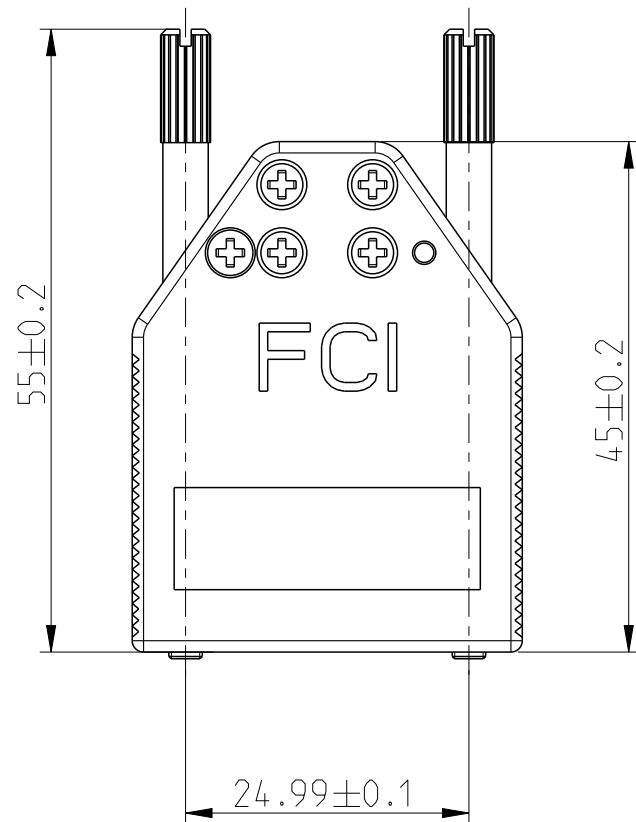
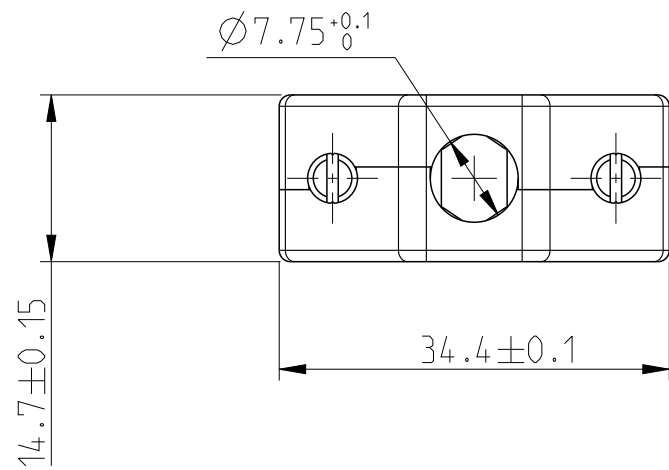


SIZE	Part Number	Jack Screw Thread	Packing
15	8655MH1501LF	UNC 4-40	bulk : Qty 80
	8655MH1511LF		individual set 50 sets/carton
	8655MH1502LF	M3	bulk : Qty 80
	8655MH1512LF		individual set 50 sets/carton


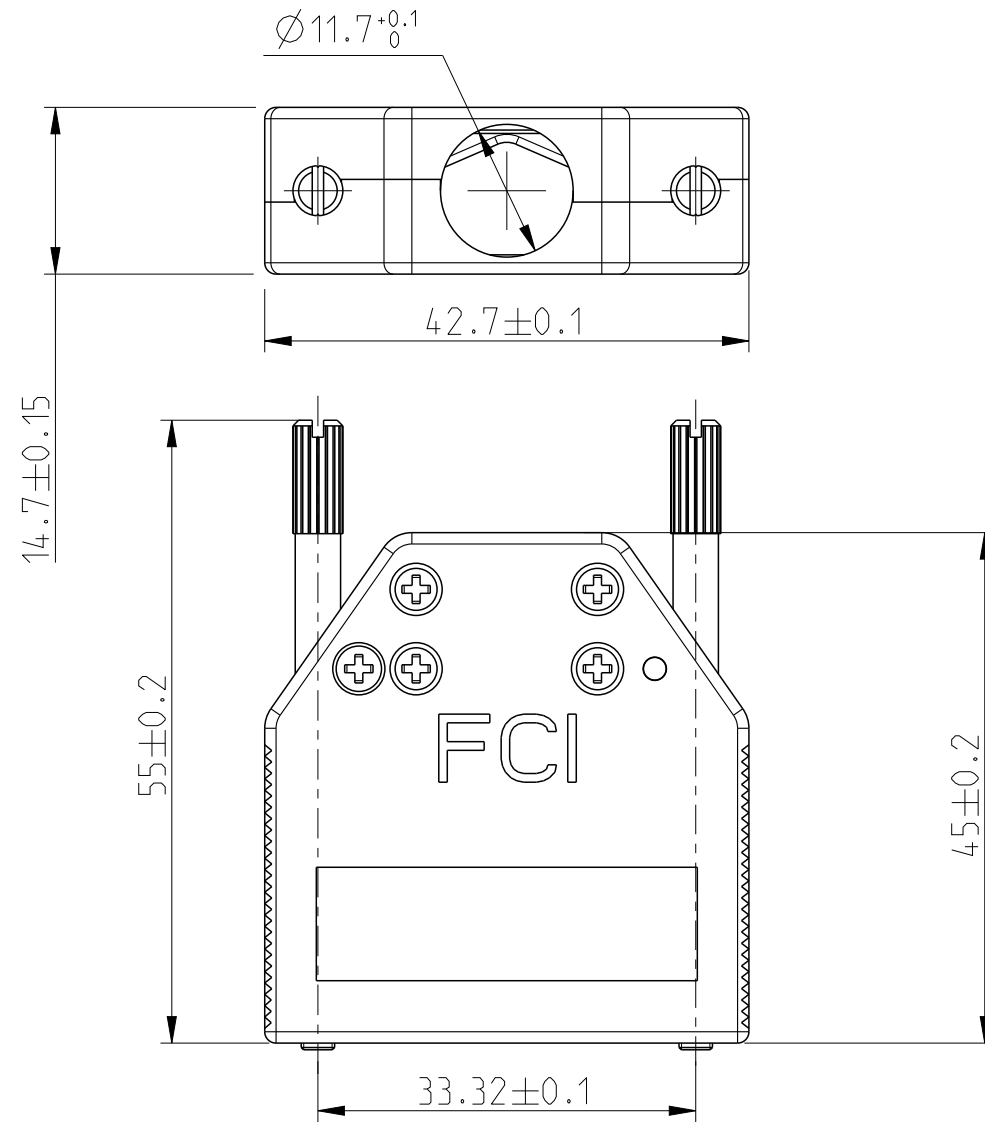


TOLERANCES UNLESS OTHERWISE SPECIFIED			tolerance std	dr	A Parrenin	2009/05/20	projection		mm		size	A3	scale	3:2
linear	X.	± /		ISO 406	eng	A Parrenin					2014/06/09	ecn no	ELX-B-17874-1	
	0.X	± /	ISO 1101	chr	A Parrenin	2014/06/09	rel level		Released					
	0.XX	± /	surface -	appr	Gert Drosbeke	2014/06/09	product family		-					
	0.XXX	± /		FCi	title	STRAIGHT METAL HOODS WITH 2 METAL CLAMPS		dwg no	C-8655-1685C		rev	C		
	0.XXXX	± /												
angular	0°	± / ° A	302	www.fci.com		cat. no.	-	Product - Customer Drw			sheet 2 of 4			

SIZE	Part Number	Jack Screw Thread	Packing
37	8655MH3701LF	UNC 4-40	bulk : Qty 40
	8655MH3711LF		individual set 50 sets/carton
	8655MH3702LF	M3	bulk : Qty 40
	8655MH3712LF		individual set 50 sets/carton

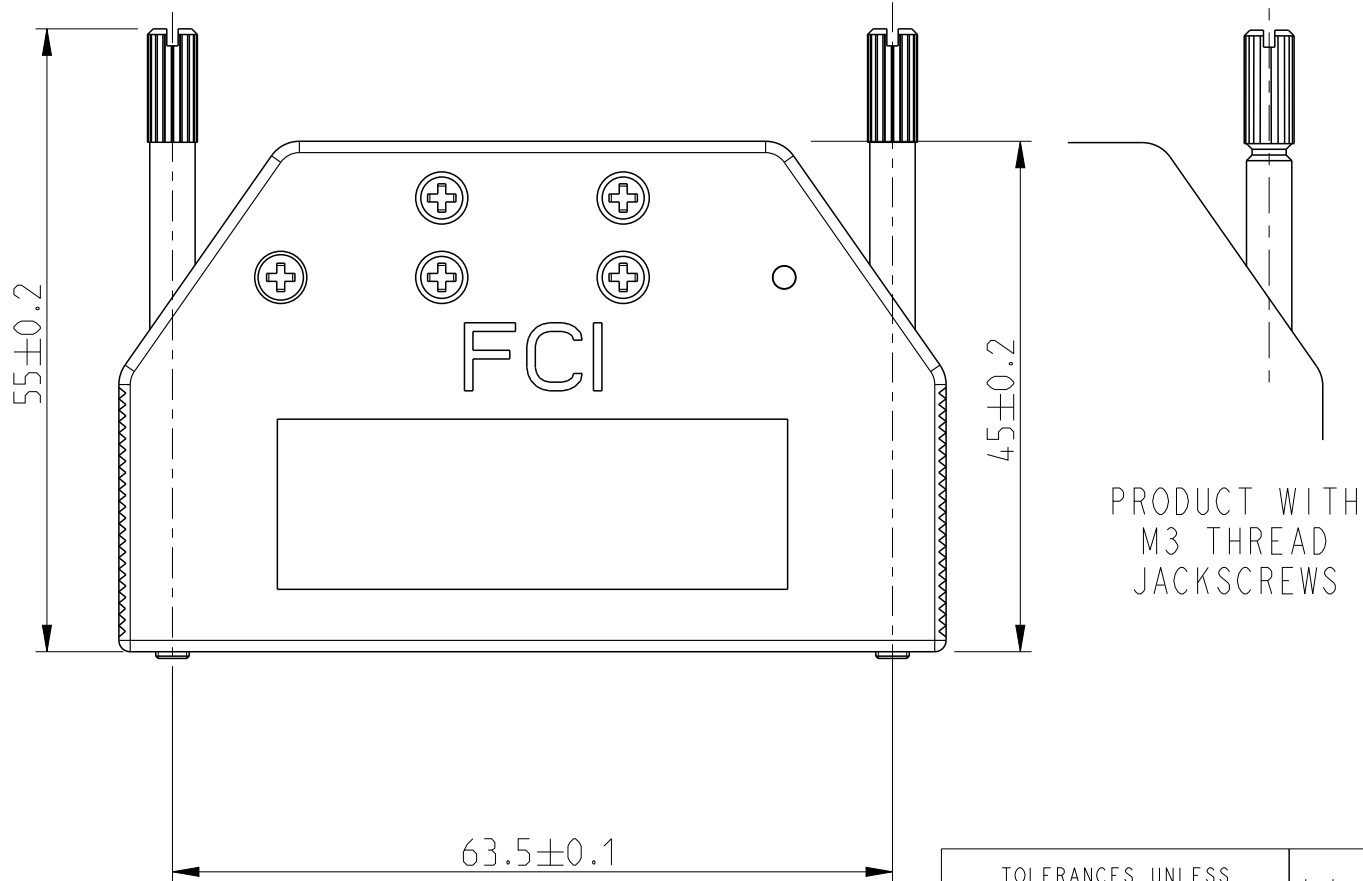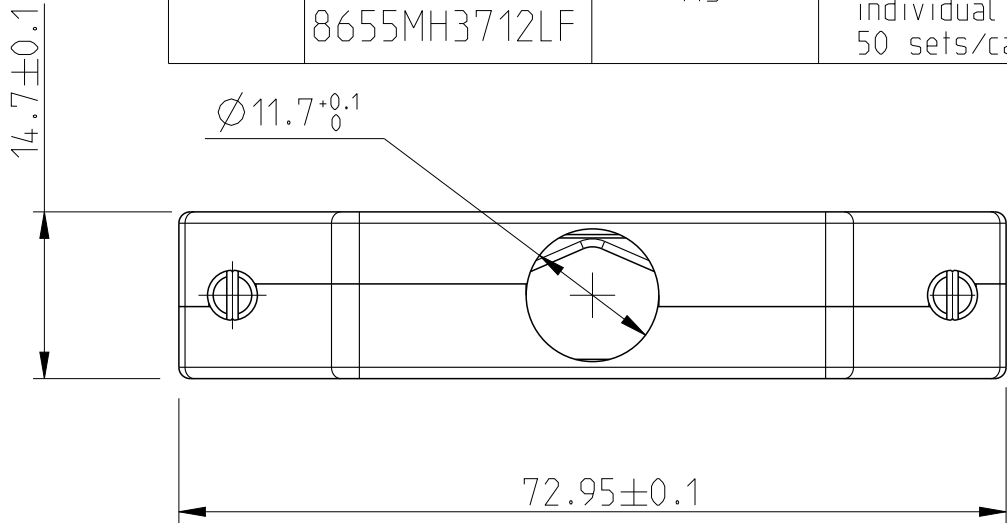

SIZE	Part Number	Jack Screw Thread	Packing
50	8655MH5001LF	UNC 4-40	bulk : Qty 40
	8655MH5011LF		individual set 50 sets/carton
	8655MH5002LF	M3	bulk : Qty 40
	8655MH5012LF		individual set 50 sets/carton

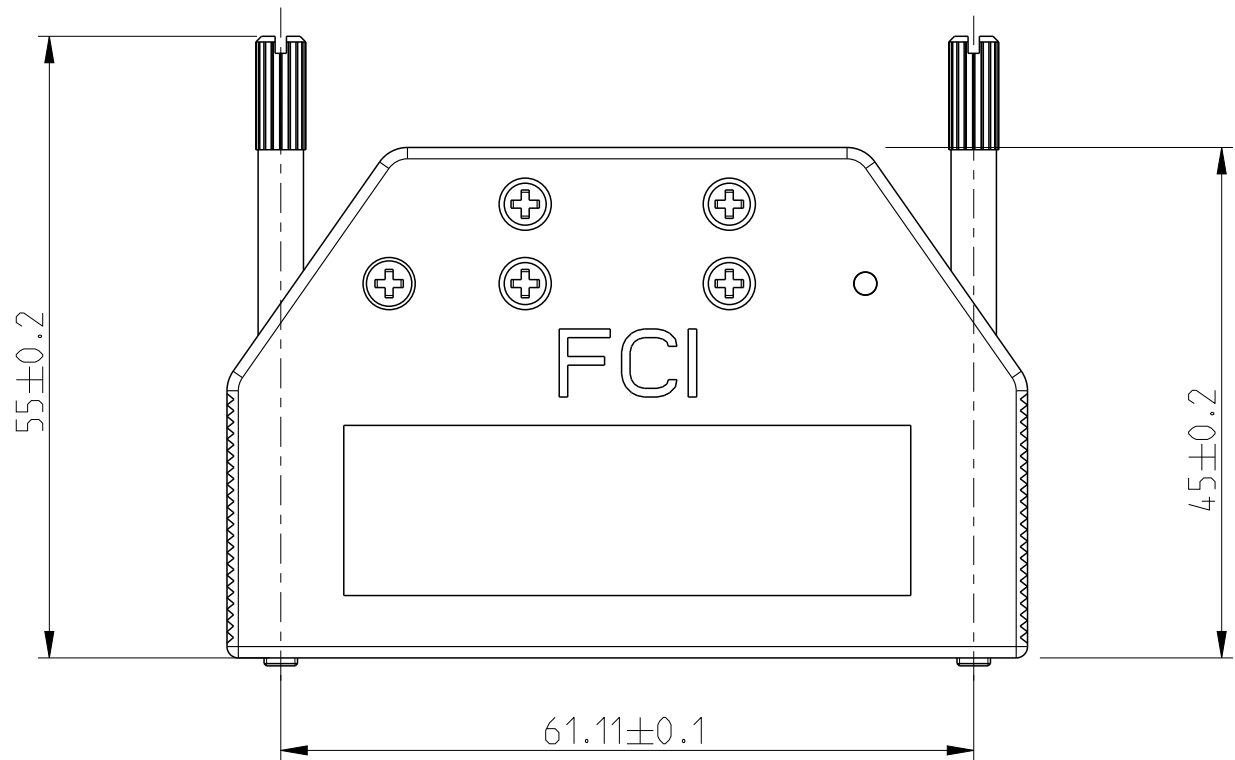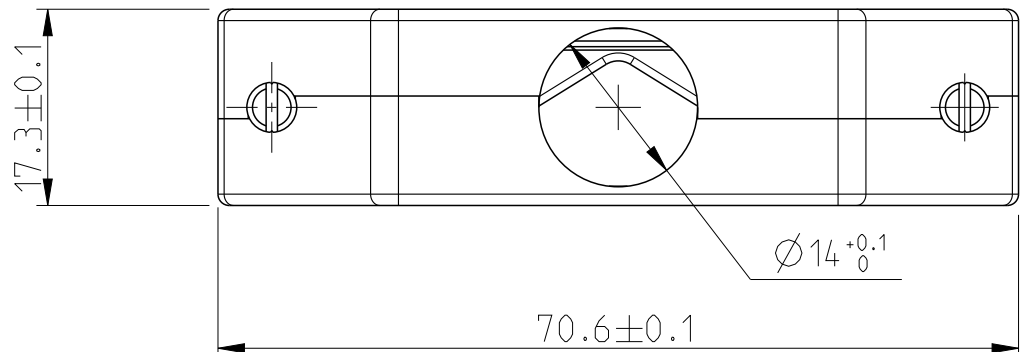


TOLERANCES UNLESS OTHERWISE SPECIFIED			tolerance std	dr	A Parrenin	2009/05/20	projection	mm	size	A3	scale	3:2			
linear	X.	±/		ISO 406	eng	A Parrenin			2014/06/09			ecn no			ELX-B-17874-1
	0.X	±/		ISO 1101	chr	A Parrenin			2014/06/09			rel level			Released
	0.XX	±/		surface	✓	appr			Gert Dreesbeke			2014/06/09	product family		
	0.XXX	±/	FCi			title	STRAIGHT METAL HOODS WITH 2 METAL CLAMPS		dwg no			C-8655-1685C		rev	C
	0.XXXX	±/													
angular	0°	±/° A	302	www.fci.com	cat. no.	-	Product - Customer Drw			sheet 3 of 4					



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.


CABLING INSTRUCTIONS

1- Strip the cable and solder or crimp the wires

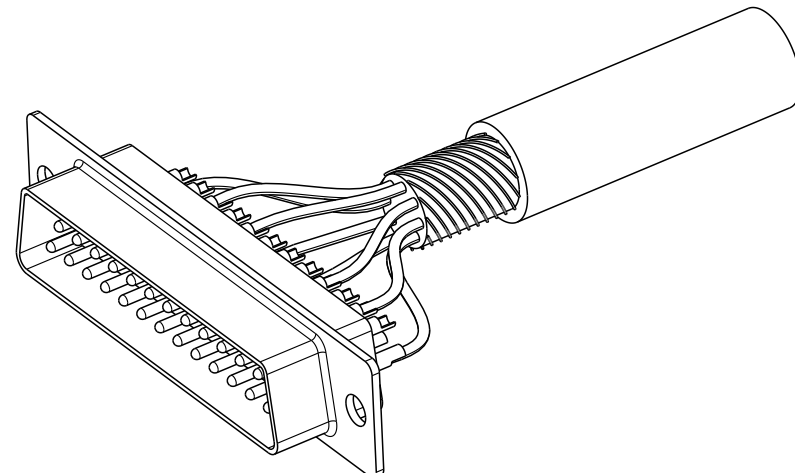


SCALE 3:2

2-Put the connector into a half hood and tighten the jacket with a metal clamp

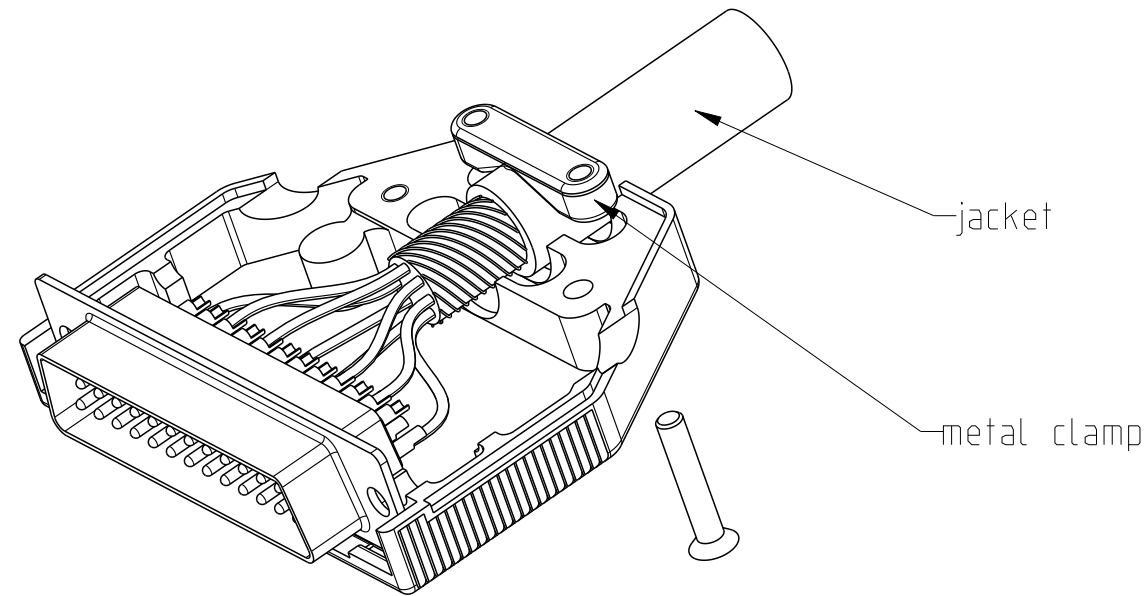


SCALE 3:2

3-To get the electrical continuity between the cable outer conductor and the hood tighten the outer conductor with the other metal clamp as shown

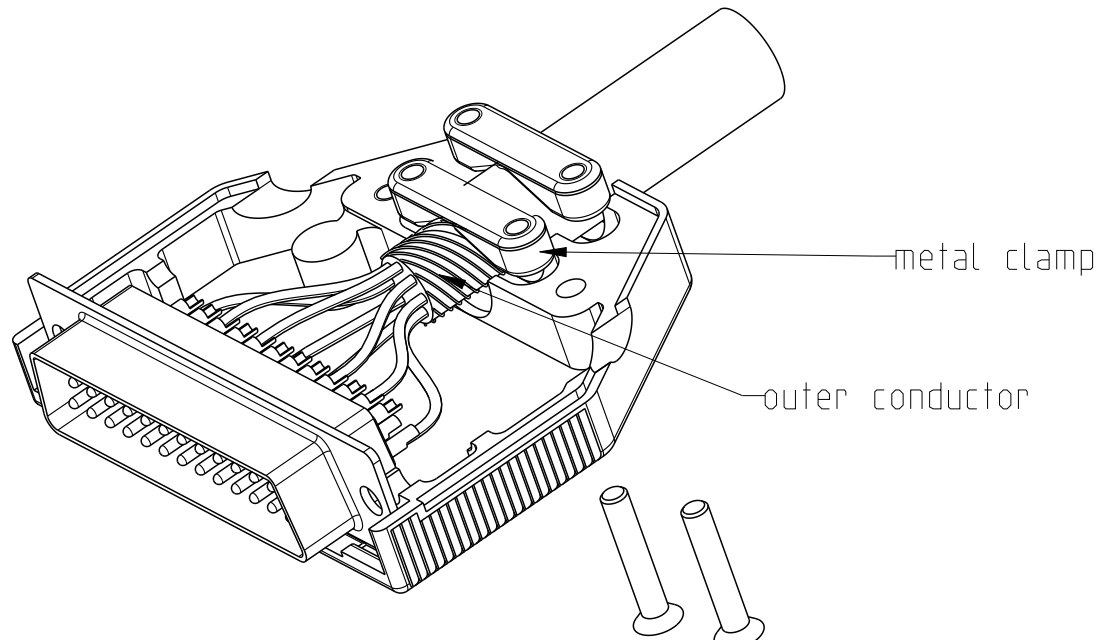

SCALE 3:2

4-Mount the jackscrews, the other half hood and tighten with 2 screws

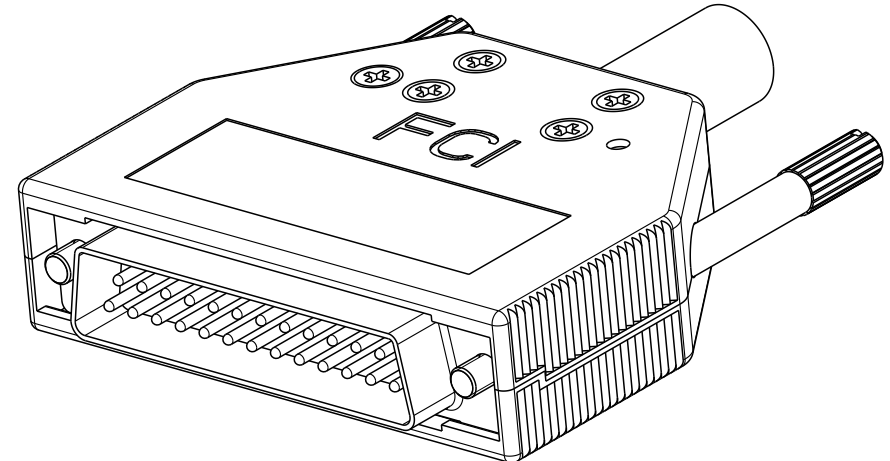

TOLERANCES UNLESS OTHERWISE SPECIFIED			tolerance std	dr	A Parrenin	2009/05/20	projection	mm	size	A3	scale	1:1
linear	X.	±/		ISO 406	eng	A Parrenin			2014/06/09	ecn no	ELX-B-17874-1	
	0.X	±/	ISO 1101 <th>chr</th> <th>A Parrenin</th> <th>2014/06/09</th> <th rowspan="3">rel level</th> <th colspan="3">Released</th>	chr	A Parrenin	2014/06/09	rel level	Released				
	0.XX	±/	surface	appr	Gert Dreesbeke	2014/06/09		product family				
	0.XXX	±/		STRAIGHT METAL HOODS				dwg no	C-8655-1685C		rev	C
	0.XXXX	±/		WITH 2 METAL CLAMPS								
angular	0°	±/° A <td>302</td> <th>www.fci.com</th> <th colspan="2">cat. no.</th> <th colspan="3">Product - Customer Drw</th> <th colspan="3">sheet 4 of 4</th>	302	www.fci.com	cat. no.		Product - Customer Drw			sheet 4 of 4		

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com