


AC Controller Modules

$$I_{RMS} = 112 \text{ A}$$

$$V_{RRM} = 800-1400 \text{ V}$$

Preliminary Data

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
800	800	MMO 110-08io7
1200	1200	MMO 110-12io7
1400	1400	MMO 110-14io7



E 72873

Symbol	Conditions	Maximum Ratings
I_{RMS}	$T_C = 85^\circ\text{C}$, 50 - 400 Hz, module	112 A
I_{TRMS}		81 A
I_{TAVM}	$T_C = 85^\circ\text{C}$; (180° sine)	51 A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	1000 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	1070 A
	$T_{VJ} = 125^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	870 A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	930 A
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	5000 A ² s
	$t = 8.3 \text{ ms}$ (60 Hz), sine	4810 A ² s
	$T_{VJ} = 125^\circ\text{C}$ $V_R = 0$ $t = 10 \text{ ms}$ (50 Hz), sine	3780 A ² s
	$t = 8.3 \text{ ms}$ (60 Hz), sine	3630 A ² s
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$ $f = 50 \text{ Hz}$, $t_p = 200 \mu\text{s}$ $V_D = \frac{2}{3} V_{DRM}$ $I_G = 0.45 \text{ A}$ $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	repetitive, $I_T = 50 \text{ A}$ 100 A/ μs
		non repetitive, $I_T = I_{TAVM}$ 500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$; $V_{DR} = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	1000 V/ μs
P_{GM}	$T_{VJ} = 125^\circ\text{C}$ $t_p = 30 \mu\text{s}$	10 W
	$I_T = I_{TAVM}$ $t_p = 300 \mu\text{s}$	5 W
P_{GAVM}		0.5 W
V_{RGM}		10 V
T_{VJ}		-40...+150 °C
T_{VJM}		150 °C
T_{stg}		-40...+125 °C
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ min}$	2500 V~
	$t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M4)	1.5...2.0/14...18 Nm/lb.in.
Weight	typ.	18 g

Data according to IEC 60747 and to a single thyristor/diode unless otherwise stated.

Features

- Thyristor controller for AC (circuit W1C acc. to IEC) for mains frequency
- Isolation voltage 3000 V~
- Planar glass passivated chips
- Low forward voltage drop
- Lead suitable for PC board solering

Applications

- Switching and control of single and three phase AC circuits
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling
- High power density
- Small and light weight

Symbol	Conditions	Characteristic Values			
I _D , I _R	T _{VJ} = 125°C; V _R = V _{RRM} ; V _D = V _{DRM}	≤	5	mA	
V _T	I _T = 150 A; T _{VJ} = 25°C	≤	1.57	V	
V _{T0}	For power-loss calculations only		0.85	V	
r _T			5.6	mΩ	
V _{GT}	V _D = 6 V	T _{VJ} = 25°C	≤	1.5	V
		T _{VJ} = -40°C	≤	1.9	V
I _{GT}	V _D = 6 V	T _{VJ} = 25°C	≤	100	mA
		T _{VJ} = -40°C	≤	200	mA
V _{GD}	T _{VJ} = 125°C; V _D = 2/3 V _{DRM}	≤	0.2	V	
I _{GD}		≤	1	mA	
I _L	T _{VJ} = 25°C; t _p = 10 μs I _G = 0.45 A; di _G /dt = 0.45 A/μs	≤	200	mA	
I _H	T _{VJ} = 25°C; V _D = 6 V; R _{GK} = ∞	≤	100	mA	
t _{gd}	T _{VJ} = 25°C; V _D = 1/2 V _{DRM} I _G = 0.45 A; di _G /dt = 0.45 A/μs	≤	2	μs	
R _{thJC}	per thyristor; DC per module		0.8	K/W	
			0.4	K/W	
R _{thCH}	per thyristor; sine 180° el per module	typ.	0.12	K/W	
		typ.	0.06	K/W	
d _S	Creeping distance on surface		11.2	mm	
d _A	Creepage distance in air		17.0	mm	
a	Max. allowable acceleration		50	m/s ²	

Dimensions in mm (1 mm = 0.0394")

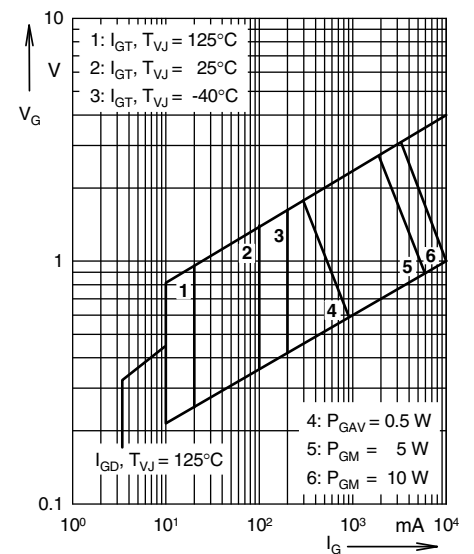
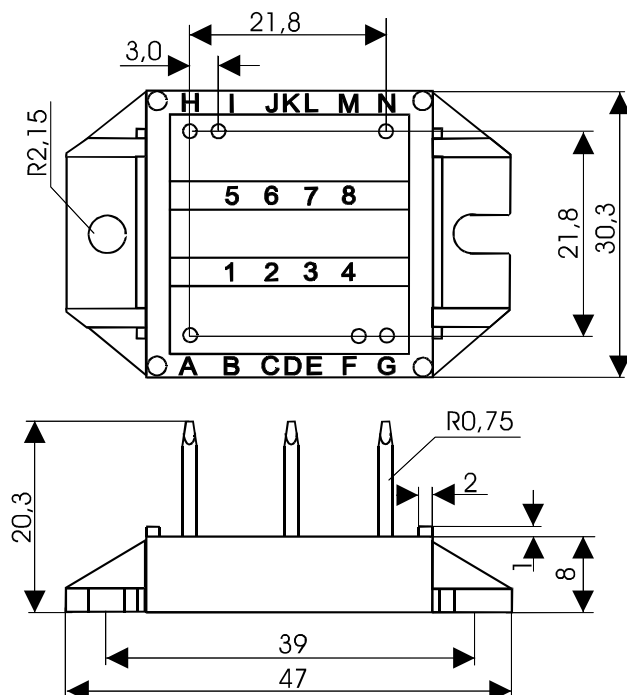


Fig. 1 Gate trigger characteristics

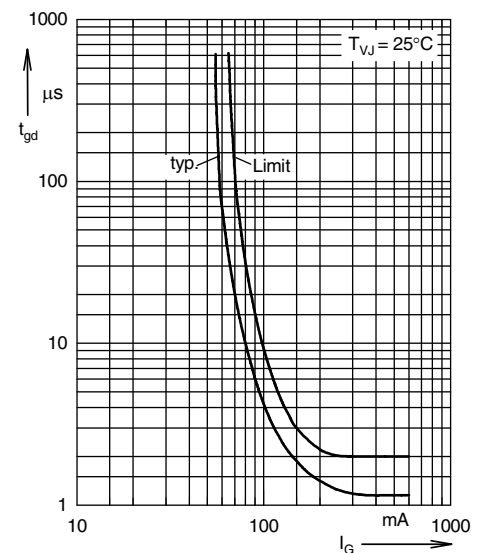


Fig. 2 Gate trigger delay time

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com