


Roof-Mounted Fan Panel, 208-240V (6 high-performance fans; 420 CFM; C14 inlet; toolless mounting.)

MODEL NUMBER: **SRXFANROOF**

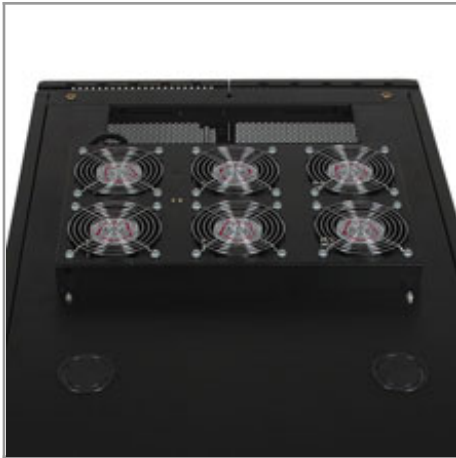

Highlights

- Roof Mount Fan Panel - 208-240V
- Ideal for increasing the ventilation of SmartRacks
- Features (6) 208-240V fans mounted in a roof panel
- Toolless mounting hardware included
- Cold rolled steel with black finish

Package Includes

- SRXFANROOF 208-240V 50/60Hz fan roof
- Toolless mounting hardware
- 6 inch C14 inlet dongle (user-supplied input cord required)

Description

Tripp Lite's SmartRack SRXFANROOF is ideal for increasing the ventilation in all rack enclosure server cabinets. The unit features (6) 208-240V high performance fans mounted in a roof panel, and includes toolless mounting hardware. Built-in cable access holes for routing of cables through fan roof panel. Supports 208-240V 50/60 Hz AC input.

COMPATIBLE SMARTRACK ENCLOSURES - SR25UB, SR25UBKD, SR25UBSP1, SR25UBTAA, SR42UB, SR42UBCL, SR42UBEXP, SR42UBG, SR42UBKD, SR42UBSP1, SR42UBTAA, SR48UB, SR48UBCL, SR48UBEXP, SR48UBSP1, SR42UBTAA, and other Tripp Lite SmartRack enclosures that specify the use of this accessory.

Features

- Ideal for increasing the ventilation in all rack enclosure server cabinets
- Features (6) 208-240V high performance fans mounted in a roof panel
- Includes toolless mounting hardware
- Built-in cable access holes for routing of cables through fan roof panel
- Supports 208-240V 50/60 Hz AC input
- Compatible SmartRack Enclosures: SR25UB, SR25UBKD, SR25UBSP1, SR25UBTAA, SR42UB, SR42UBCL, SR42UBEXP, SR42UBG, SR42UBKD, SR42UBSP1, SR42UBTAA, SR48UB, SR48UBCL, SR48UBEXP, SR48UBSP1, SR42UBTAA, and other Tripp Lite SmartRack enclosures that specify the use of this accessory

Specifications

OVERVIEW	
Model Type	Passive Cooling
INPUT	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Nominal Input Voltage(s) Supported	208V AC; 230V AC; 240V AC
Nominal Input Voltage Description	208-240V AC 50/60 Hz
Input Connection Type	IEC C14 inlet dongle (user-supplied input cord required)
Cable Length (in.)	6
Voltage Compatibility (VAC)	208; 230; 240
PHYSICAL	
Shipping Dimensions (hwd / in.)	15 x 23.3 x 27
Shipping Dimensions (hwd / cm)	38.1 x 59.18 x 68.58
Shipping Weight (lbs.)	25
Shipping Weight (kg)	11.34
Unit Dimensions (hwd / in.)	2.1 x 21.9 x 35.5
Unit Weight (lbs.)	22
Unit Weight (kg)	9.98
Unit Dimensions (cm)	5.33 x 55.63 x 90.17
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2014 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com