



Fast Recovery Epitaxial Diode (FRED)

$$\begin{aligned} I_{FAV} &= 12 \text{ A} \\ V_{RRM} &= 1000 \text{ V} \\ t_{rr} &= 50 \text{ ns} \end{aligned}$$

V_{RSM}	V_{RRM}	Type
V	V	
1000	1000	DSEI 12-10A


TO-220 AC


A = Anode, C = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$	25	A
I_{FAVM} ①	$T_C = 100^\circ\text{C}$; rectangular, $d = 0.5$	12	A
I_{FRM}	$t_p < 10 \mu\text{s}$; rep. rating, pulse width limited by T_{VJM}	150	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	75	A
		80	A
	$T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	65	A
		70	A
I^2t	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	28	A ² s
		27	A ² s
	$T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	21	A ² s
		20	A ² s
T_{VJ}		-40...+150	°C
T_{VJM}		150	°C
T_{stg}		-40...+150	°C
P_{tot}	$T_C = 25^\circ\text{C}$	78	W
M_d	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

Symbol	Conditions	Characteristic Values		
		typ.	max.	
I_R	$V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$		250	μA
	$V_R = 0.8 \cdot V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$		150	μA
	$V_R = 0.8 \cdot V_{RRM}$ $T_{VJ} = 125^\circ\text{C}$		4	mA
V_F	$I_F = 12 \text{ A}$ $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$		2.1	V
			2.7	V
V_{T0}	For power-loss calculations only		1.67	V
r_T	$T_{VJ} = T_{VJM}$		33.6	m Ω
R_{thJC}		0.5	1.6	K/W
R_{thCH}				K/W
R_{thJA}			60	K/W
t_{rr}	$I_F = 1 \text{ A}$; $-di/dt = 50 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$	50	60	ns
I_{RM}	$V_R = 540 \text{ V}$; $I_F = 12 \text{ A}$; $-di_F/dt = 100 \text{ A}/\mu\text{s}$ $L \leq 0.05 \mu\text{H}$; $T_{VJ} = 100^\circ\text{C}$	6.5	7.2	A

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} . $V_R = 0.8 \cdot V_{RRM}$, duty cycle $d = 0.5$
Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

Features

- International standard package JEDEC TO-220 AC
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behaviour
- Epoxy meets UL 94V-0

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

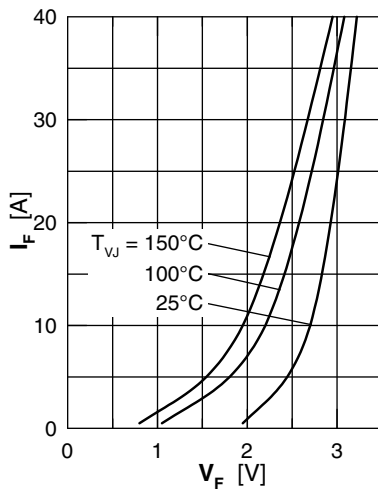


Fig. 1 Forward current versus voltage drop

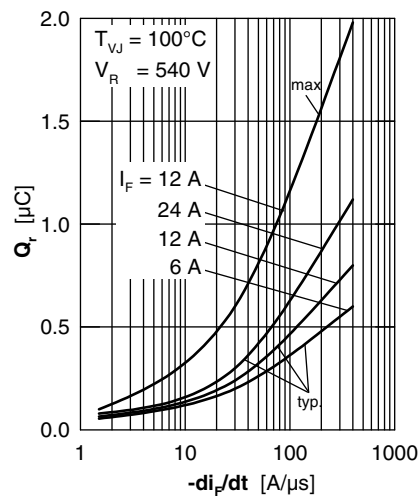


Fig. 2 Recovery charge versus $-di_F/dt$

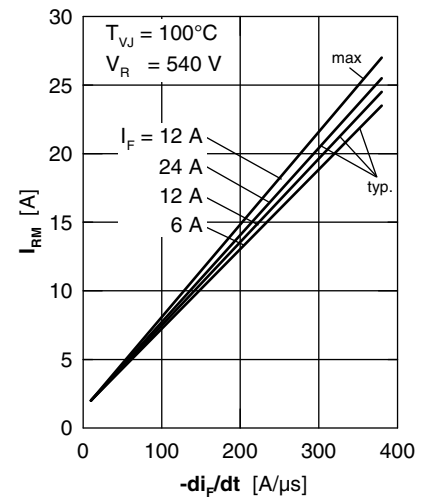


Fig. 3 Peak reverse current versus $-di_F/dt$

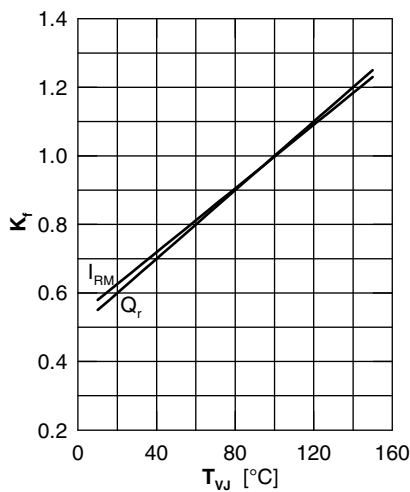


Fig. 4 Dynamic parameters versus junction temperature

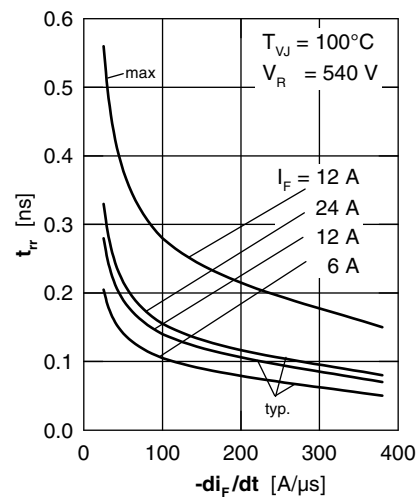


Fig. 5 Recovery time versus $-di_F/dt$

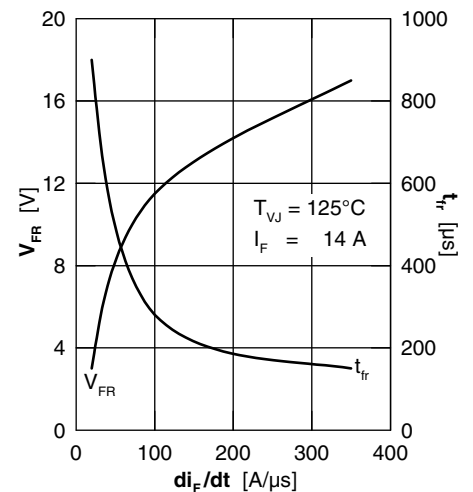


Fig. 6 Peak forward voltage versus di_F/dt

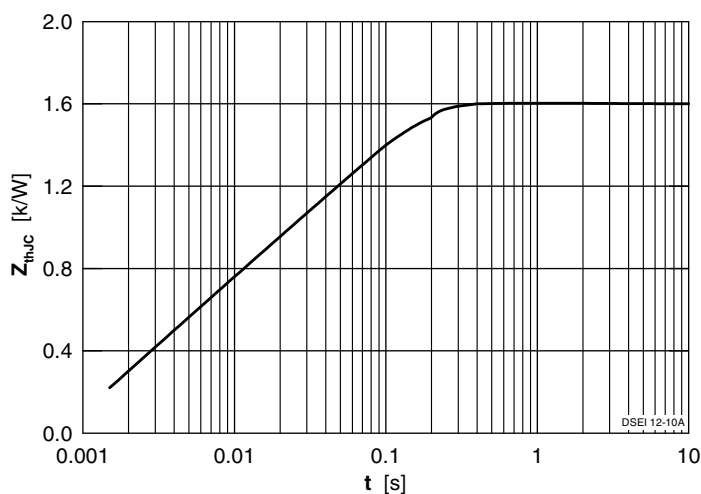


Fig. 7 Transient thermal resistance junction to case

Technical drawing of a mechanical part, showing front and side views with dimensions labeled A through Q.

Front View Dimensions:

- A:** Total height of the part.
- B:** Height of the main rectangular body.
- C:** Width of the top rectangular section.
- D:** Thickness of the top flange.
- E:** Height of the top flange.
- F:** Distance from the top edge of the flange to the center of the hole.
- G:** Diameter of the hole.
- H:** Height of the lower section.
- J:** Diameter of the lower section.
- K:** Thickness of the base flange.

Side View Dimensions:

- L:** Total width of the part.
- M:** Width of the base flange.
- N:** Distance from the front face to the start of the lower section.
- O:** Distance from the front face to the center of the hole.
- P:** Distance from the front face to the start of the top flange.
- Q:** Thickness of the top flange.

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.7	14.73	0.5	0.58
B	14.23	16.51	0.56	0.65
C	9.66	10.66	0.38	0.42
D	3.54	4.08	0.139	0.161
E	5.85	6.85	2.3	0.42
F	2.54	3.42	0.1	0.135
G	1.15	1.77	0.045	0.07
H	-	6.35	-	0.25
J	0.64	0.89	0.025	0.035
K	4.83	5.33	0.19	0.21
L	3.56	4.82	0.14	0.19
M	0.51	0.76	0.02	0.03
N	2.04	2.49	0.08	0.115
Q	0.64	1.39	0.025	0.055

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com