
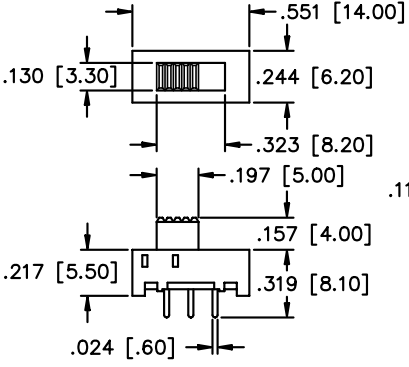
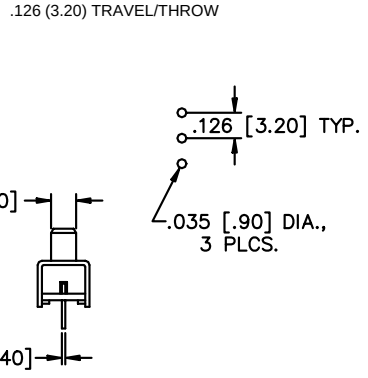

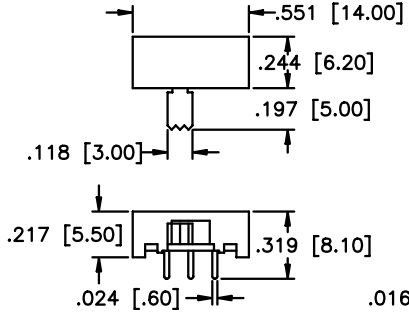
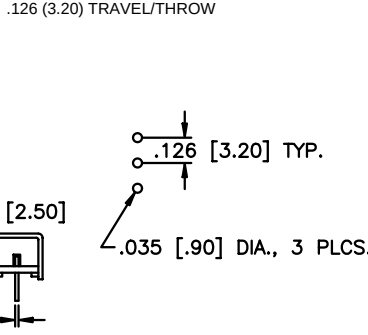


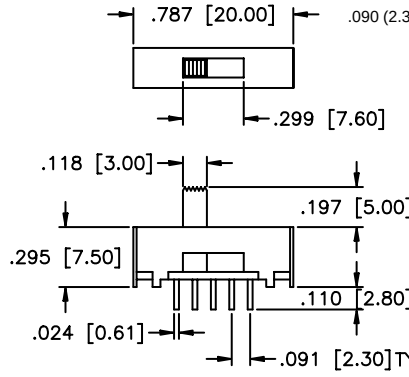
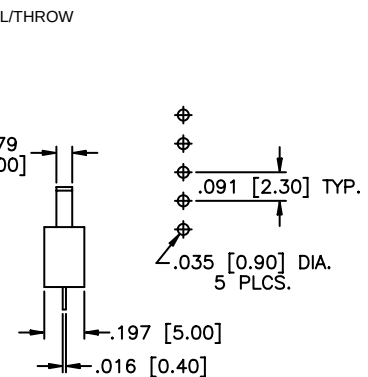


SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 125 VAC or 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 220g ± 100g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	• Miniature compact size. • Wash-through open frame construction. • Positive spring loaded ball detent mechanism. • Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated Frame: Zinc plated steel Actuator: Thermoplastic Base: Phenolic laminated sheet Terminal seal: Epoxy














MODEL NO. SLB12814  VERTICAL ACTUATOR	1P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB1281R5  RIGHT ANGLE ACTUATOR	1P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB1370  VERTICAL ACTUATOR	1P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

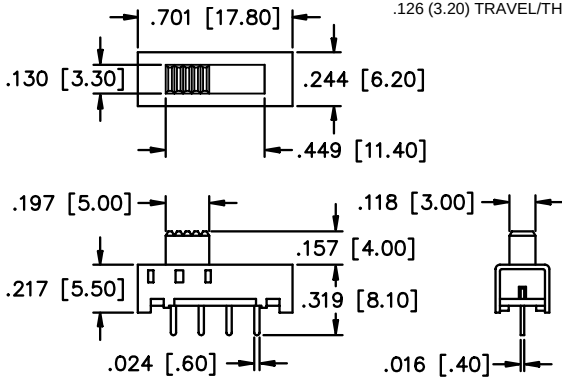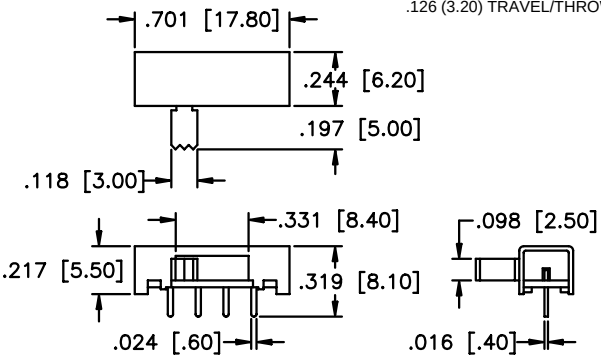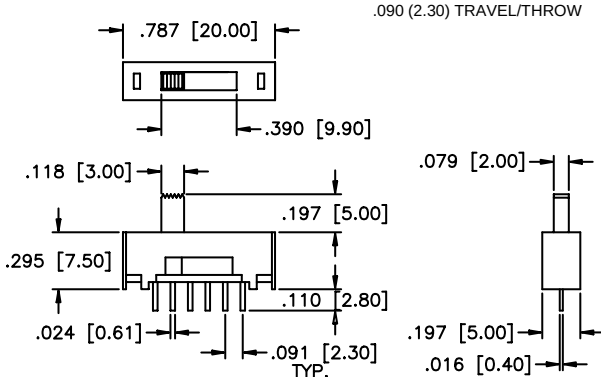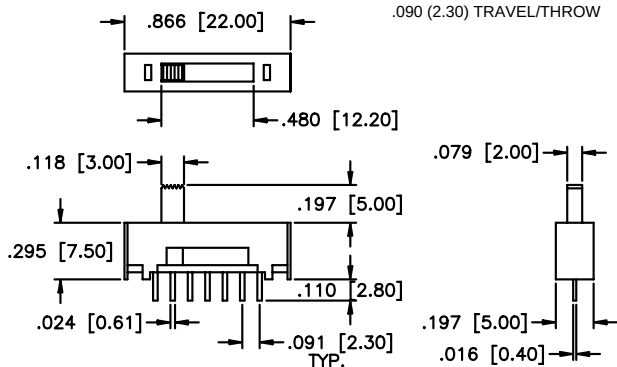SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE













MODEL NO. SLB13814  VERTICAL ACTUATOR	1P3T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1381R5  RIGHT ANGLE ACTUATOR	1P3T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1470  VERTICAL ACTUATOR	1P4T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1570  VERTICAL ACTUATOR	1P5T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

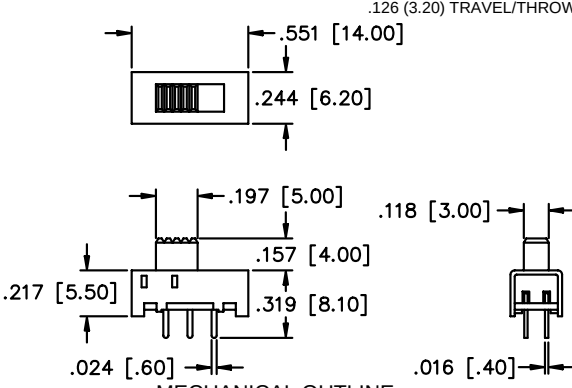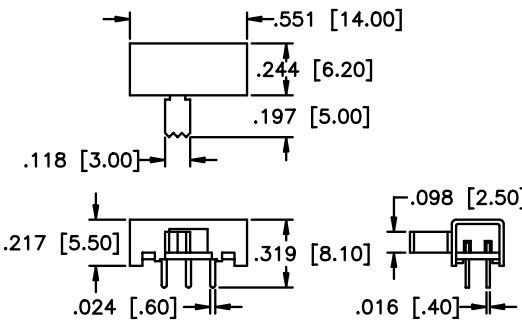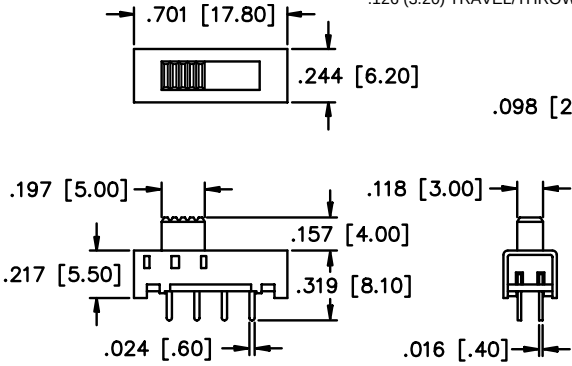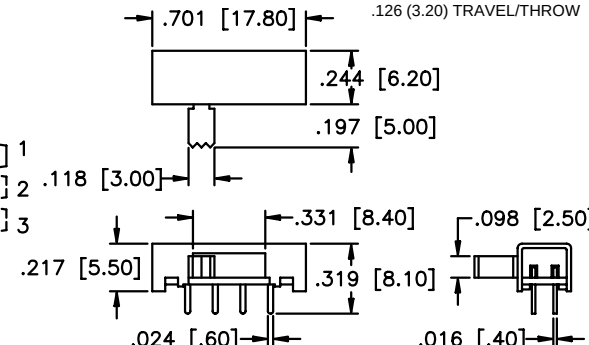SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB22814	2P2T  VERTICAL ACTUATOR SCHEMATIC  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB2281R5	2P2T  RIGHT ANGLE ACTUATOR SCHEMATIC  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB23814	2P3T  VERTICAL ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB2381R5	2P3T  RIGHT ANGLE ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 











SLB Series

(with thru- p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 125 VAC or 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 220g ± 100g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	- Miniature compact size. - Wash-through open frame construction. - Positive spring loaded ball detent mechanism. - Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated Frame: Zinc plated steel Actuator: Thermoplastic Base: Phenolic laminated sheet Terminal seal: Epoxy

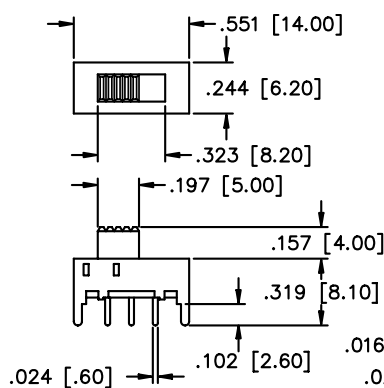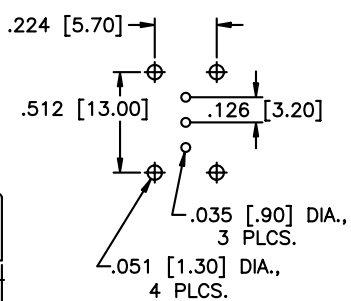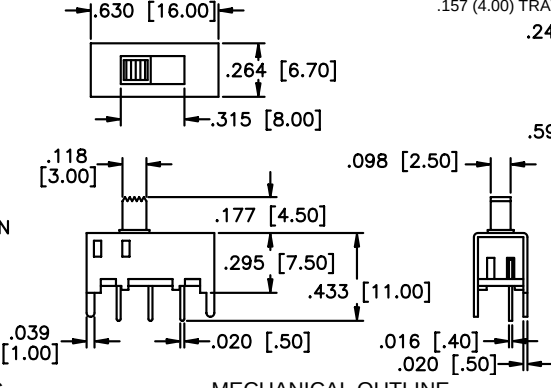


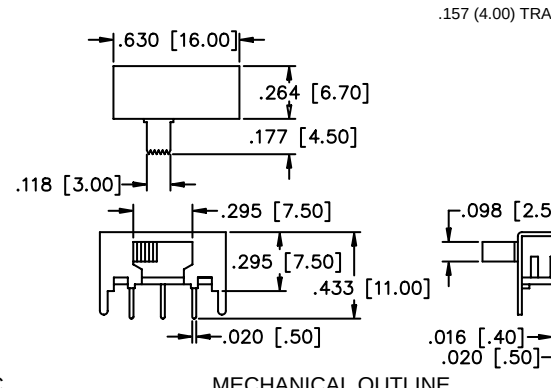

MODEL NO. SLB12804	1P2T  ● = COMMON  VERTICAL ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB124145	1P2T  ● = COMMON  VERTICAL ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB1240R45	1P2T  ● = COMMON  RIGHT ANGLE ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT

SLB Series

(with thru- p.c. board hole mounting bracket)

Miniature Slide Switches

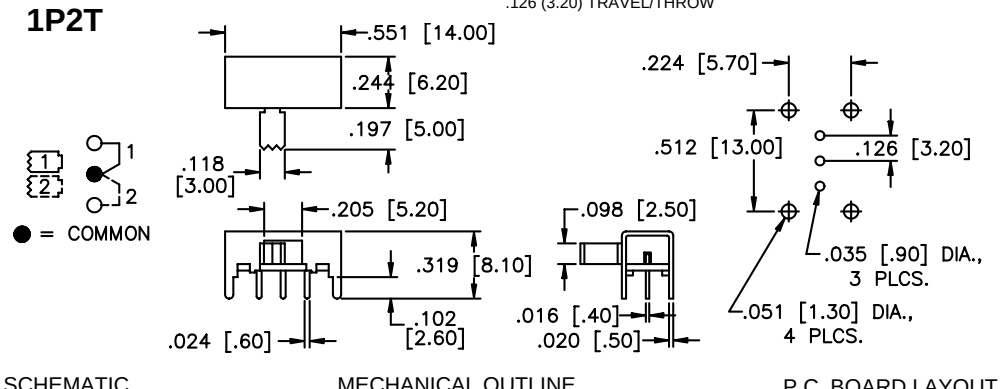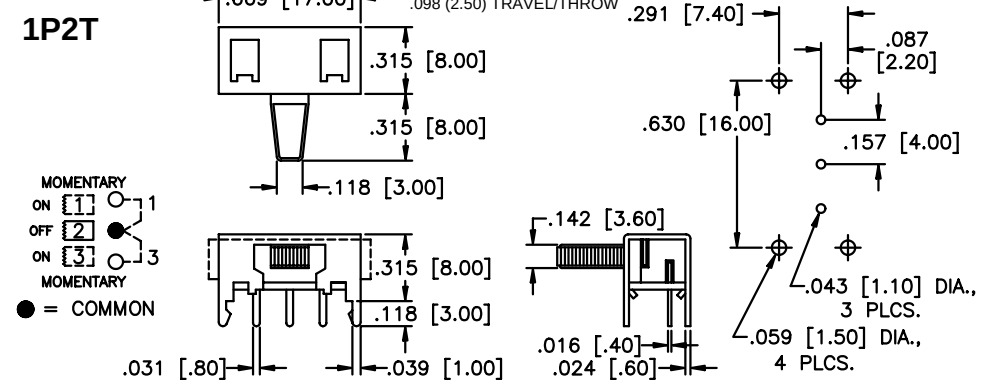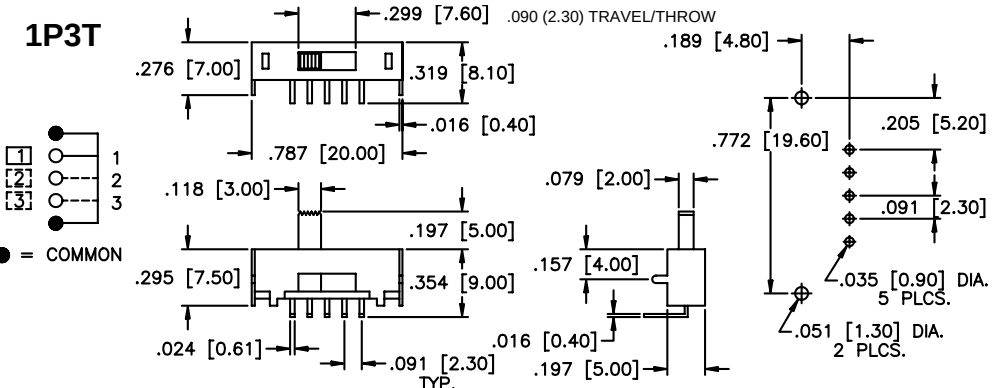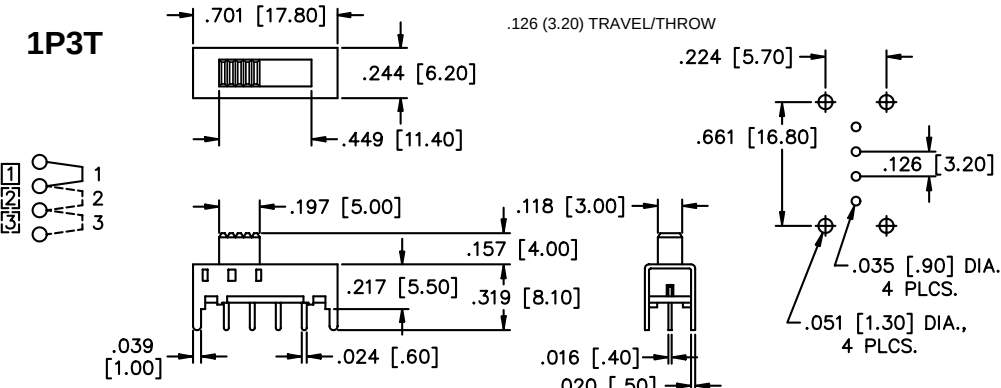SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB1280R5  RIGHT ANGLE ACTUATOR	1P2T .126 (3.20) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1250R8  RIGHT ANGLE ACTUATOR	1P2T .098 (2.50) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1370R  RIGHT ANGLE ACTUATOR	1P3T .090 (2.30) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB13804  VERTICAL ACTUATOR	1P3T .126 (3.20) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLB Series

(with thru-p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MODEL NO.

SLB134145




VERTICAL ACTUATOR


1P3T



SCHEMATIC

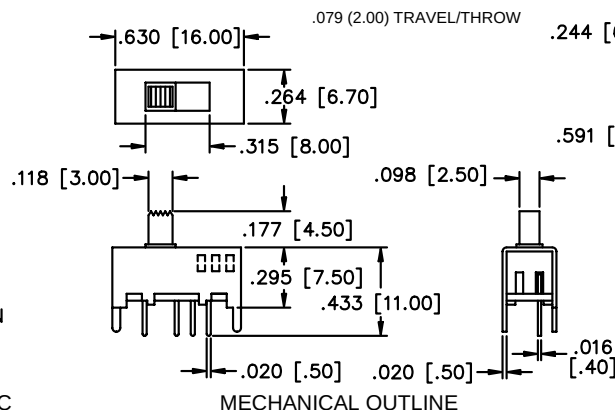

MECHANICAL OUTLINE

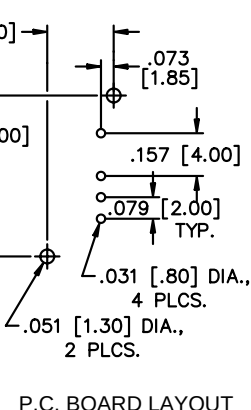

P.C. BOARD LAYOUT


MODEL NO.

SLB1340R45




RIGHT ANGLE ACTUATOR


1P3T



SCHEMATIC

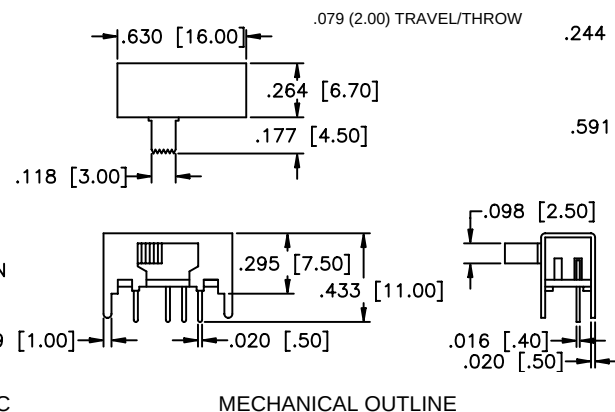

MECHANICAL OUTLINE

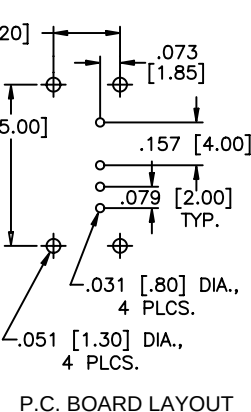

P.C. BOARD LAYOUT


MODEL NO.

SLB1380R5




RIGHT ANGLE ACTUATOR


1P3T



SCHEMATIC

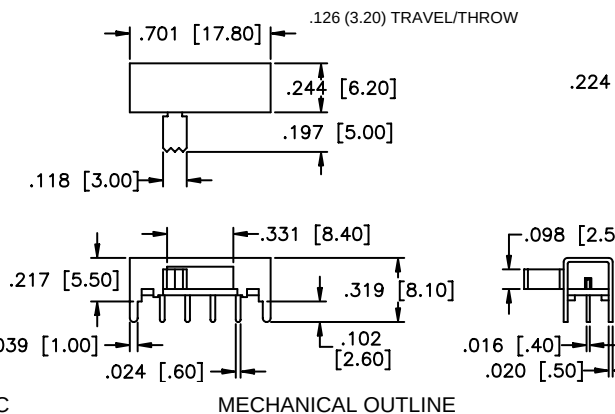


MECHANICAL OUTLINE

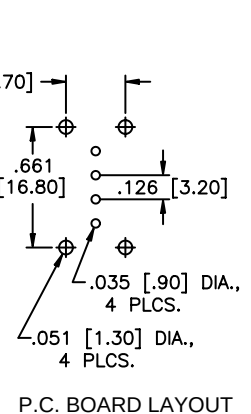

P.C. BOARD LAYOUT


MODEL NO.

SLB1470R




RIGHT ANGLE ACTUATOR


1P4T



SCHEMATIC

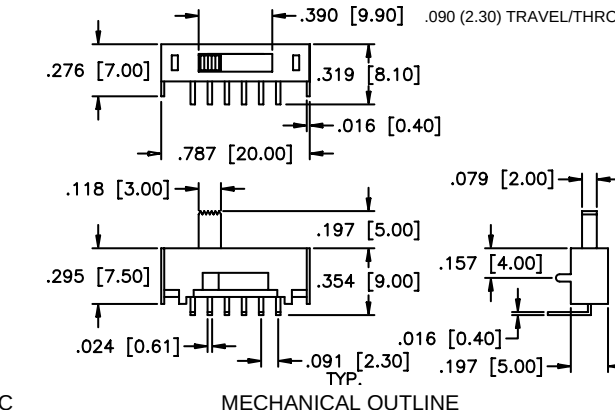

MECHANICAL OUTLINE

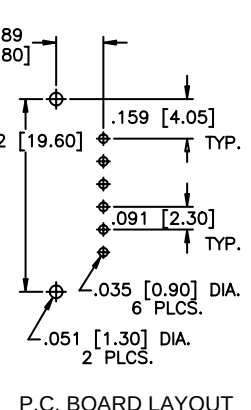

P.C. BOARD LAYOUT

SLB Series


(with thru-p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MODEL NO.

SLB1570R




RIGHT ANGLE ACTUATOR


1P5T



SCHEMATIC

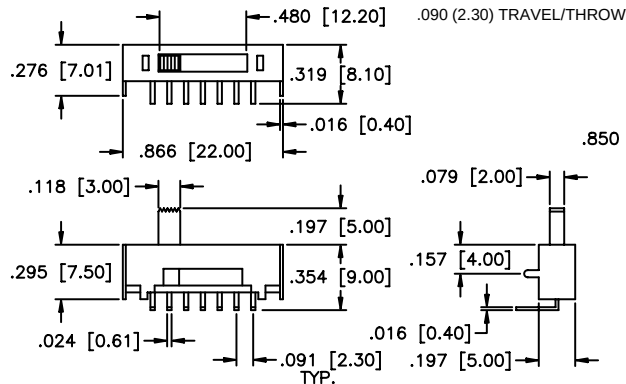

MECHANICAL OUTLINE

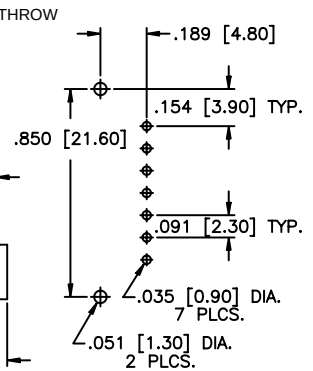

P.C. BOARD LAYOUT


MODEL NO.

SLB22804




VERTICAL ACTUATOR


2P2T



SCHEMATIC

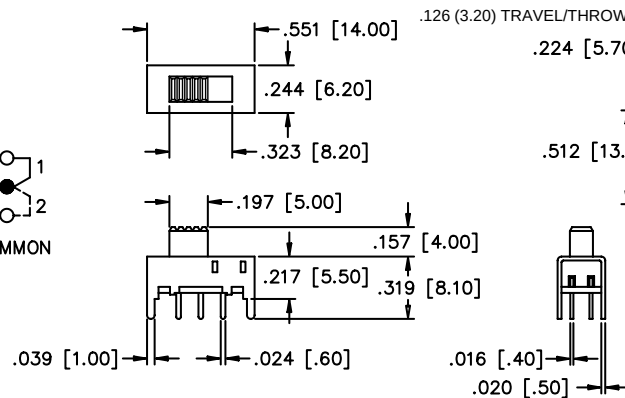

MECHANICAL OUTLINE

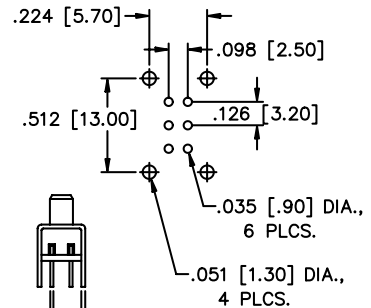

P.C. BOARD LAYOUT


MODEL NO.

SLB224145




VERTICAL ACTUATOR


2P2T



SCHEMATIC

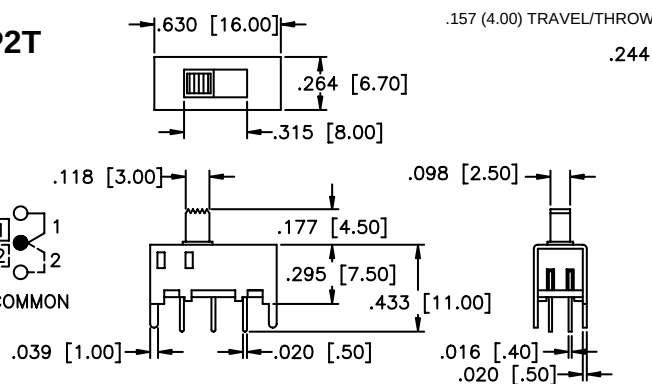

MECHANICAL OUTLINE



P.C. BOARD LAYOUT


MODEL NO.

SLB2240R45




RIGHT ANGLE ACTUATOR


2P2T



SCHEMATIC

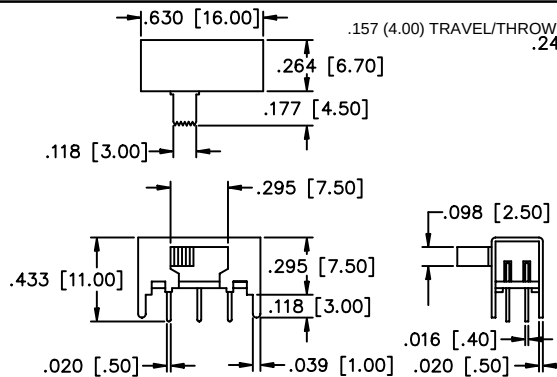

MECHANICAL OUTLINE













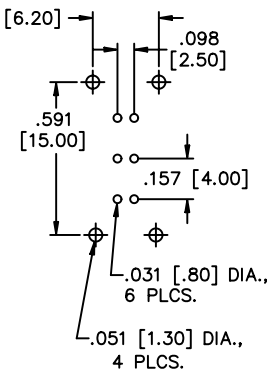


P.C. BOARD LAYOUT

SLB Series

(with thru-p.c. board hole mounting bracket)
Miniature Slide Switches

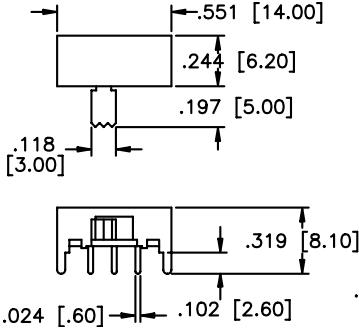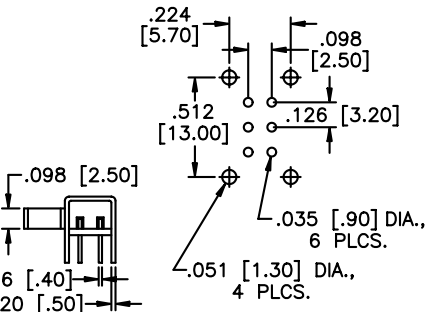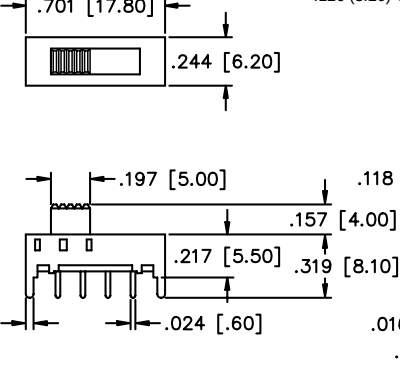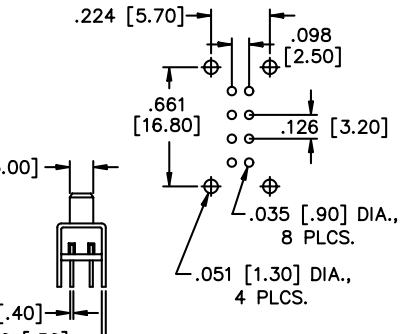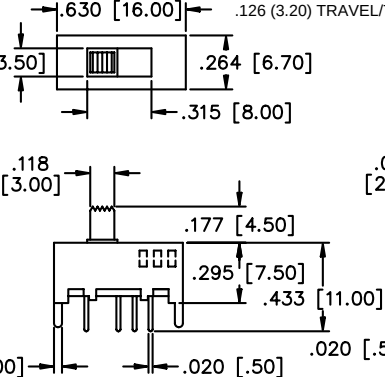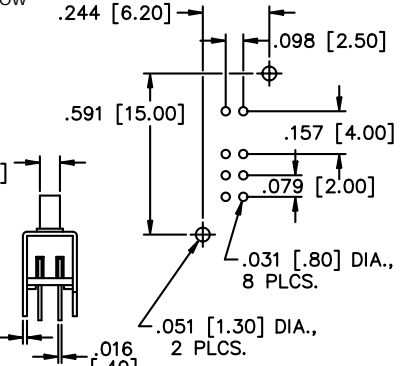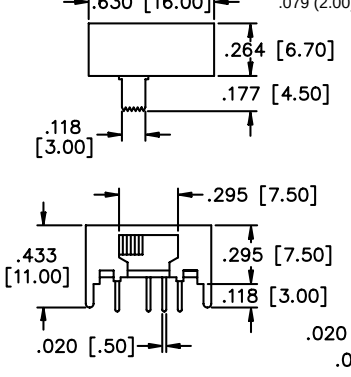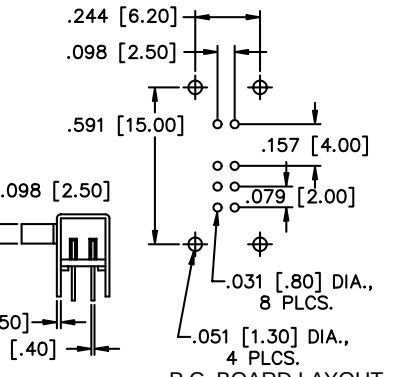SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB2280R5  RIGHT ANGLE ACTUATOR	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB23804  VERTICAL ACTUATOR	2P3T   MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB234145  VERTICAL ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB2340R45  RIGHT ANGLE ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com