



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK



MICROWAVE CORPORATION v01.0813



HMC985LP4KE


GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz

Typical Applications

The HMC985LP4KE is ideal for:

- Point-to-Point Radio
- VSAT Radio
- Test Instrumentation
- Microwave Sensors
- Military, ECM & Radar

Functional Diagram

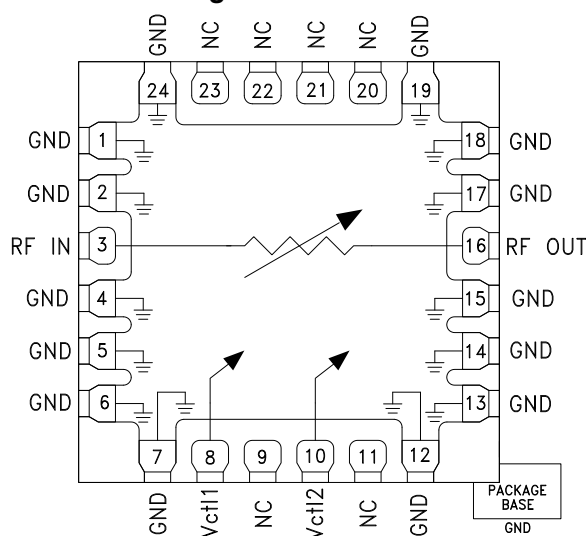

Features

- Wide Bandwidth: 10 - 40 GHz
- Excellent Linearity: +32 dB Input IP3
- Wide Attenuation Range: 35 dB
- No External Matching
- 24 Lead 4x4 mm SMT Package: 16 mm²

General Description

The HMC985LP4KE is an absorptive Voltage Variable Attenuator (VVA) which operates from 10 - 40 GHz and is ideal in designs where an analog DC control signal must be used to control RF signal levels over a 35 dB dynamic range. It features two shunt-type attenuators which are controlled by two analog voltages, Vctl1 and Vctl2. Optimum linearity performance of the attenuator is achieved by first varying Vctl1 of the first attenuation stage from -3V to 0V with Vctl2 fixed at -3V. The control voltage of the second attenuation stage, Vctl2, should then be varied from -3V to 0V with Vctl1 fixed at 0V.

if the Vctl1 and Vctl2 pins are connected together it is possible to achieve the full analog attenuation range with only a small degradation in input IP3 performance. Applications include AGC circuits and temperature compensation of multiple gain stages in microwave point-to-point and VSAT radios.

Electrical Specifications, $T_A = +25^\circ\text{C}$, Test Condition $V_{ctl1} = V_{ctl2}$

Parameter	Frequency	Min.	Typ.	Max.	Units
Insertion Loss ^[1]	10 - 20 GHz		3	3.5	dB
	20 - 30 GHz		3	4	dB
	30 - 40 GHz		3.5	4.5	dB
Attenuation Range	10 - 20 GHz	25	30		dB
	20 - 30 GHz	30	35		dB
	30 - 40 GHz	35	40		dB
Input Return Loss	10 - 40 GHz		13		dB
Output Return Loss	10 - 40 GHz		13		dB
Input Third Order Intercept (two-tone input Power = 10 dBm Each Tone) ^[2]			33		dBm

[1] Vctl1 = Vctl2 = -2.4V

[2] Vctl1 = Vctl2 = -2.0V worst case


For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com


Application Support: Phone: 978-250-3343 or apps@hittite.com

GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz


Attenuation vs. Frequency over Vctrl1 = Variable, Vctrl2 = -3V

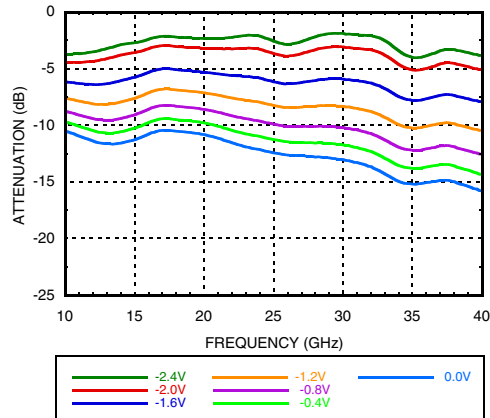


Attenuation vs. Frequency over Vctrl1 = 0V, Vctrl2 = Variable

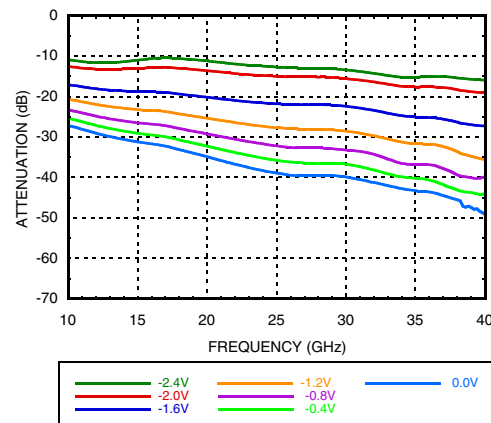


**Attenuation vs. Vctrl1
Over Temperature @ 25 GHz, Vctrl2 = -3V**

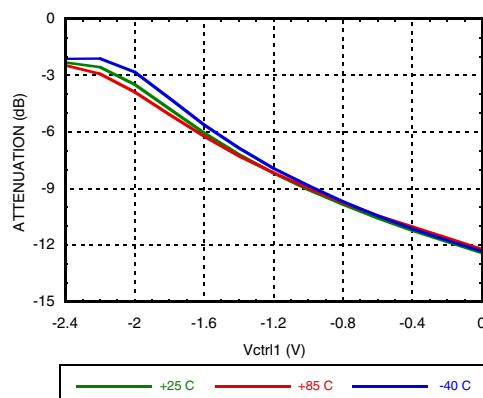


**Attenuation vs. Vctrl2
Over Temperature @ 30 GHz, Vctrl1 = 0V**

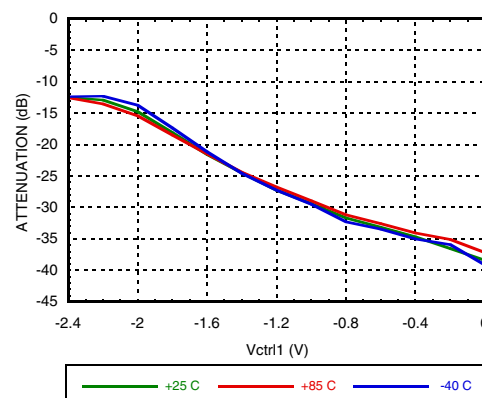

**Attenuation vs. Pin @ 20 GHz over Vctrl1
Vctrl1 = Variable, Vctrl2 = -3V**

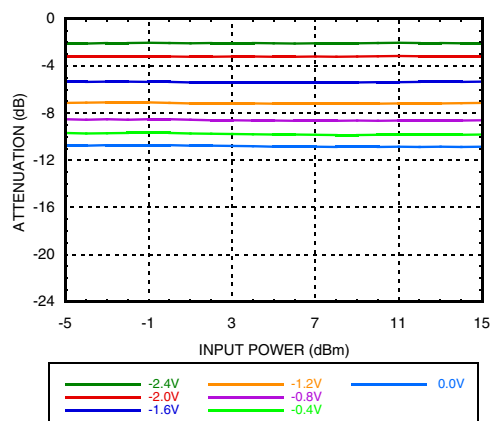

**Attenuation vs. Pin @ 20 GHz over Vctrl2
Vctrl2 = Variable, Vctrl1 = 0V**

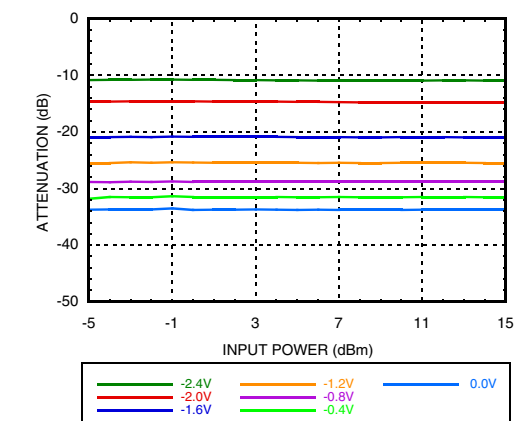



MICROWAVE CORPORATION v01.0813




HMC985LP4KE

GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz


Input Return Loss

Vctl1 = Variable, Vctl2 = -3V

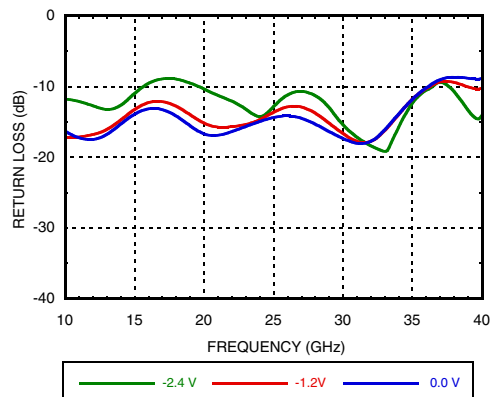


Input Return Loss

Vctl1 = 0V, Vctl2 = Variable

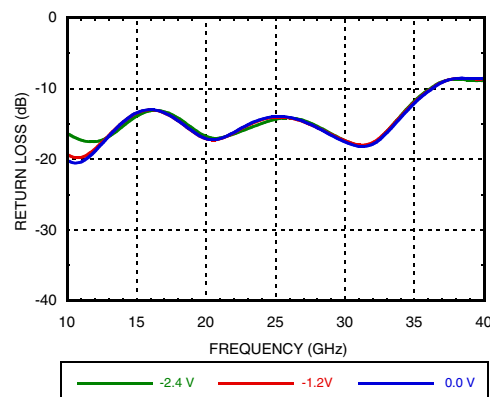


Output Return Loss

Vctl1 = Variable, Vctl2 = -3V

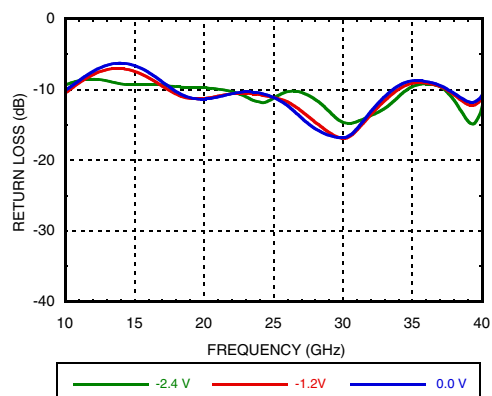


Output Return Loss

Vctl1 = 0V, Vctl2 = Variable

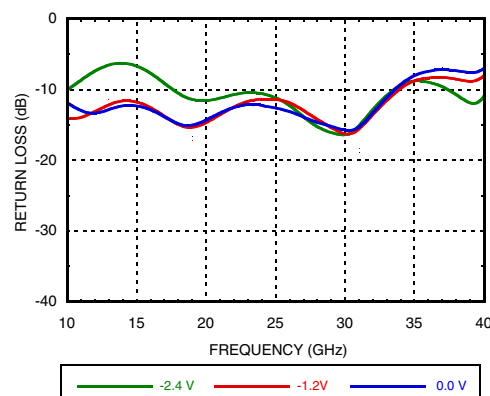


Input IP3 vs. Input Power @ 20 GHz

Vctl1 = Variable, Vctl2 = -3V

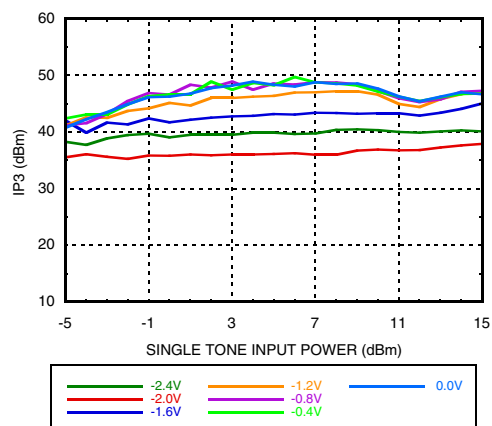

Input IP3 vs. Input Power Over Frequency

Vctl1 = -2V, Vctl2 = -3V [1]

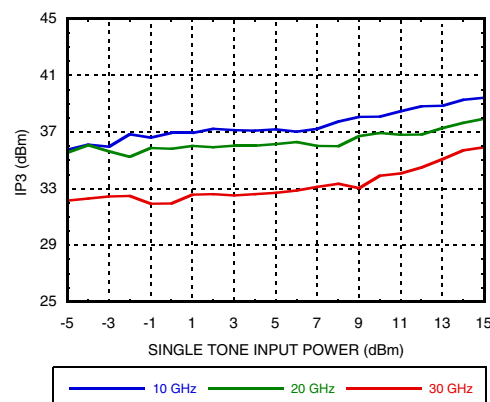


[1] Worst Case IP3

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.comApplication Support: Phone: 978-250-3343 or apps@hittite.com

GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz


Input IP3 vs. Input Power Over Temperature @ 20 GHz, Vctl1 = -2V, Vctl2 = -3V [1]

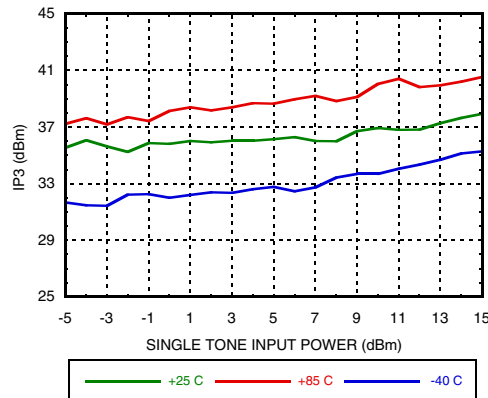


Input IP3 vs. Input Power @ 20 GHz Vctl2 = Variable, Vctl1 = 0V

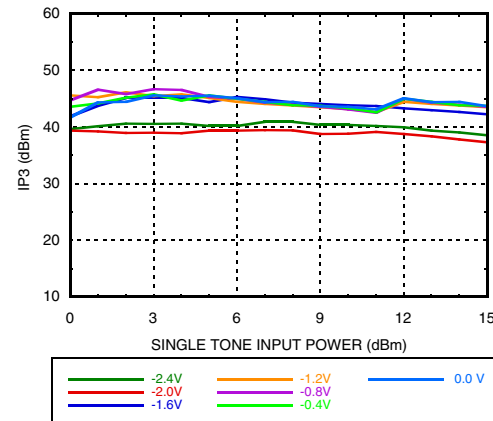

Input IP3 vs. Input Power Over Frequency Vctl2 = -2V, Vctl1 = 0V [1]

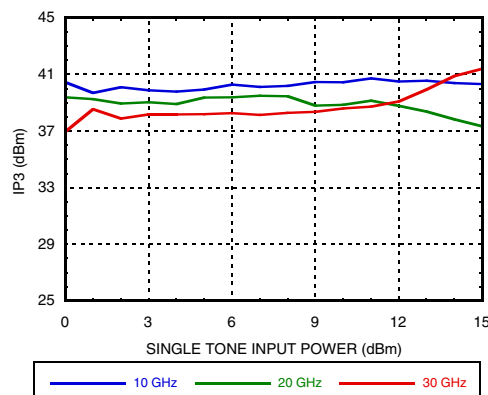

Input IP3 vs Input Power over Temperature @ 20 GHz, Vctl2 = -2V, Vctl1 = 0V [1]

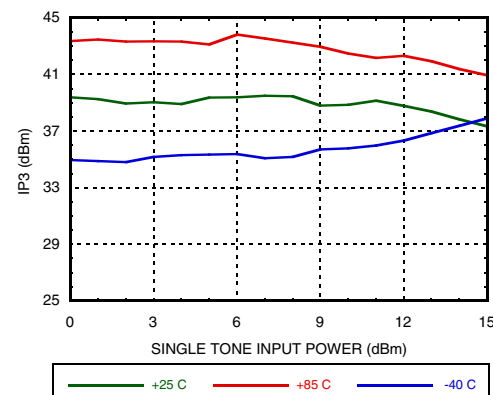




[1] Worst Case IP3




MICROWAVE CORPORATION v01.0813





HMC985LP4KE

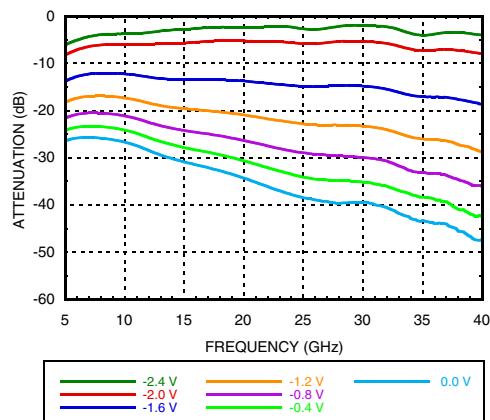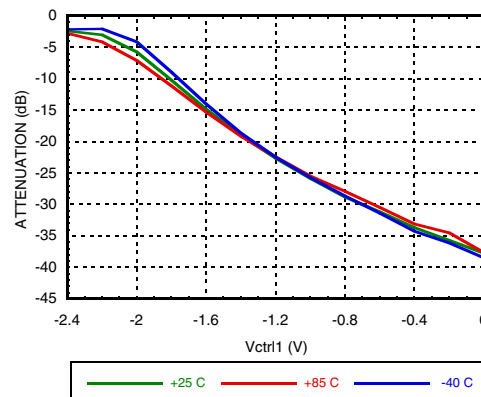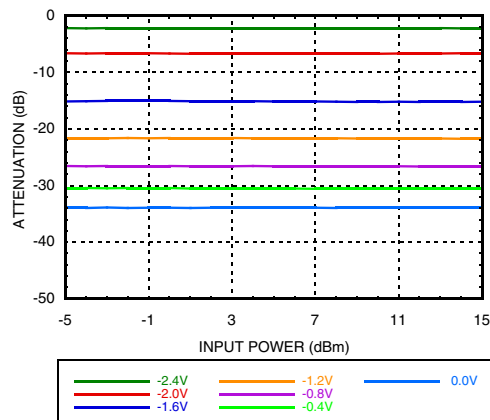GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHzAttenuation vs Frequency Over Vctrl
Vctrl1 = Vctrl2Attenuation vs. Vctrl Over Temperature
@ 20 GHz, Vctrl1 = Vctrl2Attenuation vs. Pin @ 20 GHz Over Vctrl
Vctrl1 = Vctrl2

Input Return Loss, Vctrl1 = Vctrl2

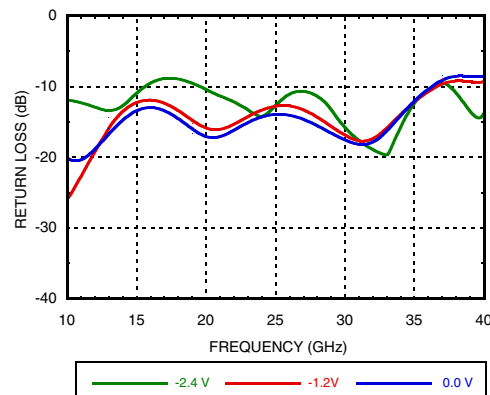


Output Return Loss, Vctrl1 = Vctrl2

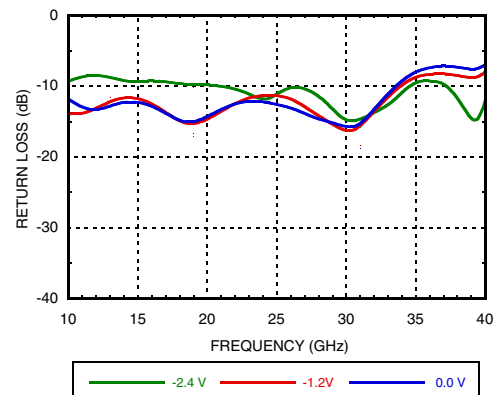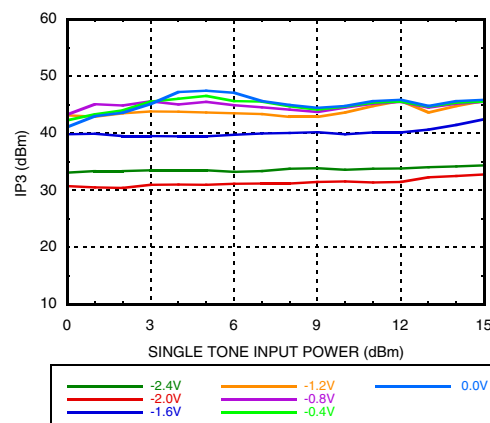Input IP3 vs. Input Power Over
Vctrl @ 20 GHz, Vctrl1 = Vctrl2




GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz

Input IP3 vs. Input Power Over Frequency
 $V_{ctl1} = V_{ctl2}$

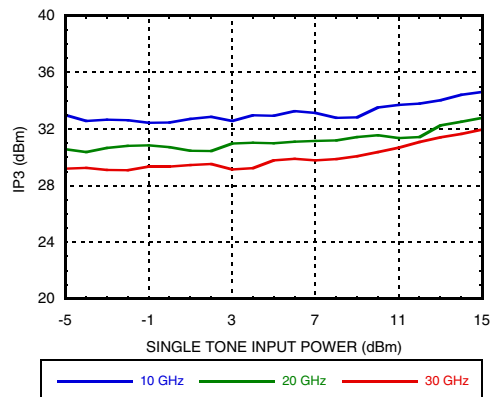

Input IP3 vs. Input Power Over Temperature @ 20 GHz
 $V_{ctl1} = V_{ctl2}$

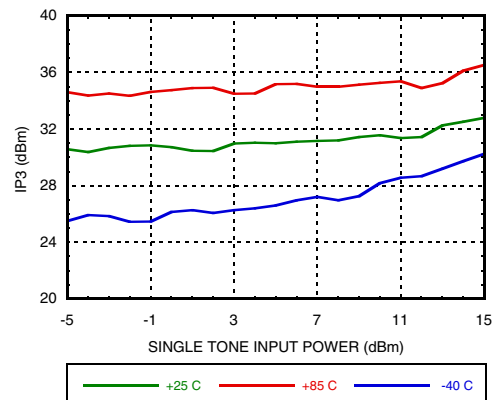




MICROWAVE CORPORATION v01.0813

**HMC985LP4KE****GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz****Absolute Maximum Ratings**

Control Voltage	+1 to -5V
Input RF Power	30 dBm
Maximum Junction Temperature	165 °C
Thermal Resistance (R_{TH}) (junction to ground paddle)	62 °C/W
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to 125°C
ESD Sensitivity (HBM)	Class1A, passed 250V

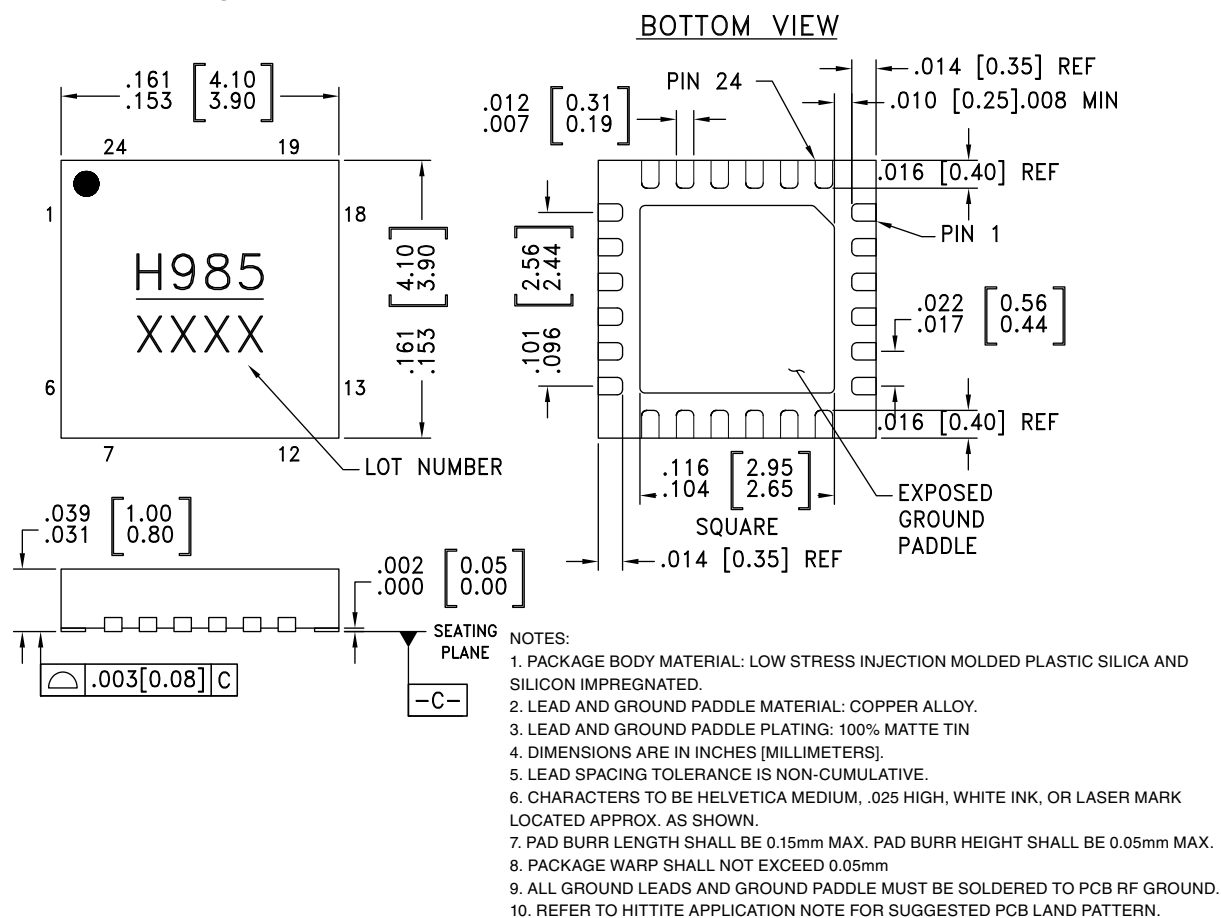**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS****Outline Drawing****Package Information**

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking
HMC985LP4KE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[1]	H985 XXX

[1] Max peak reflow temperature of 260 °C





[2] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.comApplication Support: Phone: 978-250-3343 or apps@hittite.com

GaAs MMIC VOLTAGE - VARIABLE ATTENUATOR, 10 - 40 GHz

Pin Descriptions

Pin Number	Function	Description	Pin Schematic
1, 2, 4-7, 12-15, 17-19, 24	GND	These pins and package bottom must be connected to RF/DC ground externally.	
3	RFIN	This pad is DC coupled and matched to 50 Ohms.	
8	Vctl1	Control Voltage 1.	
9, 11, 20-23	NC	These pins are not connected internally, however all data shown herein was measured with these pins connected to RF/DC ground externally.	
10	Vctl2	Control Voltage 2.	
16	RFOUT	This pad is DC coupled and matched to 50 Ohms.	

Application Circuit

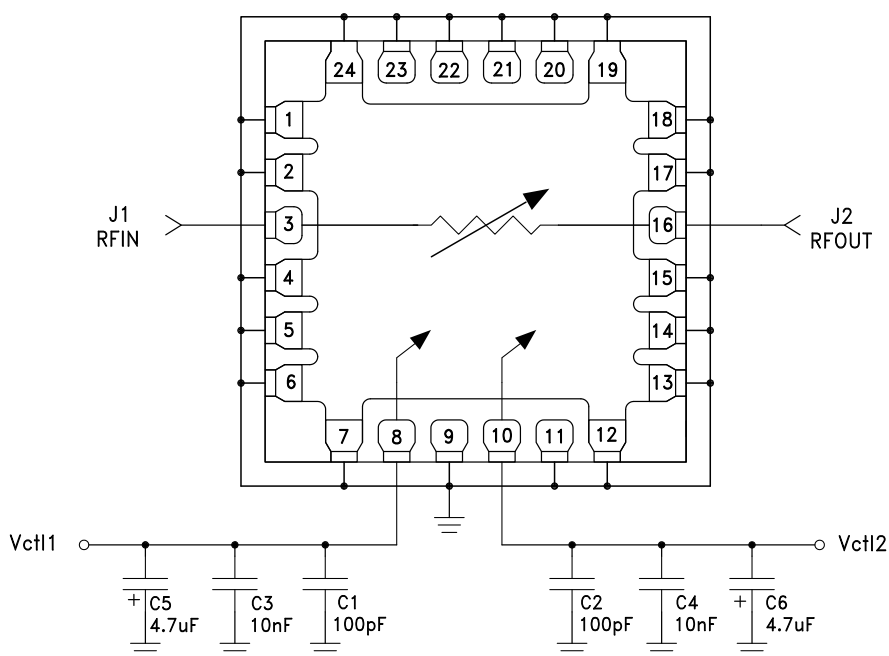




MICROWAVE CORPORATION v01.0813

**HMC985LP4KE**

**GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz**

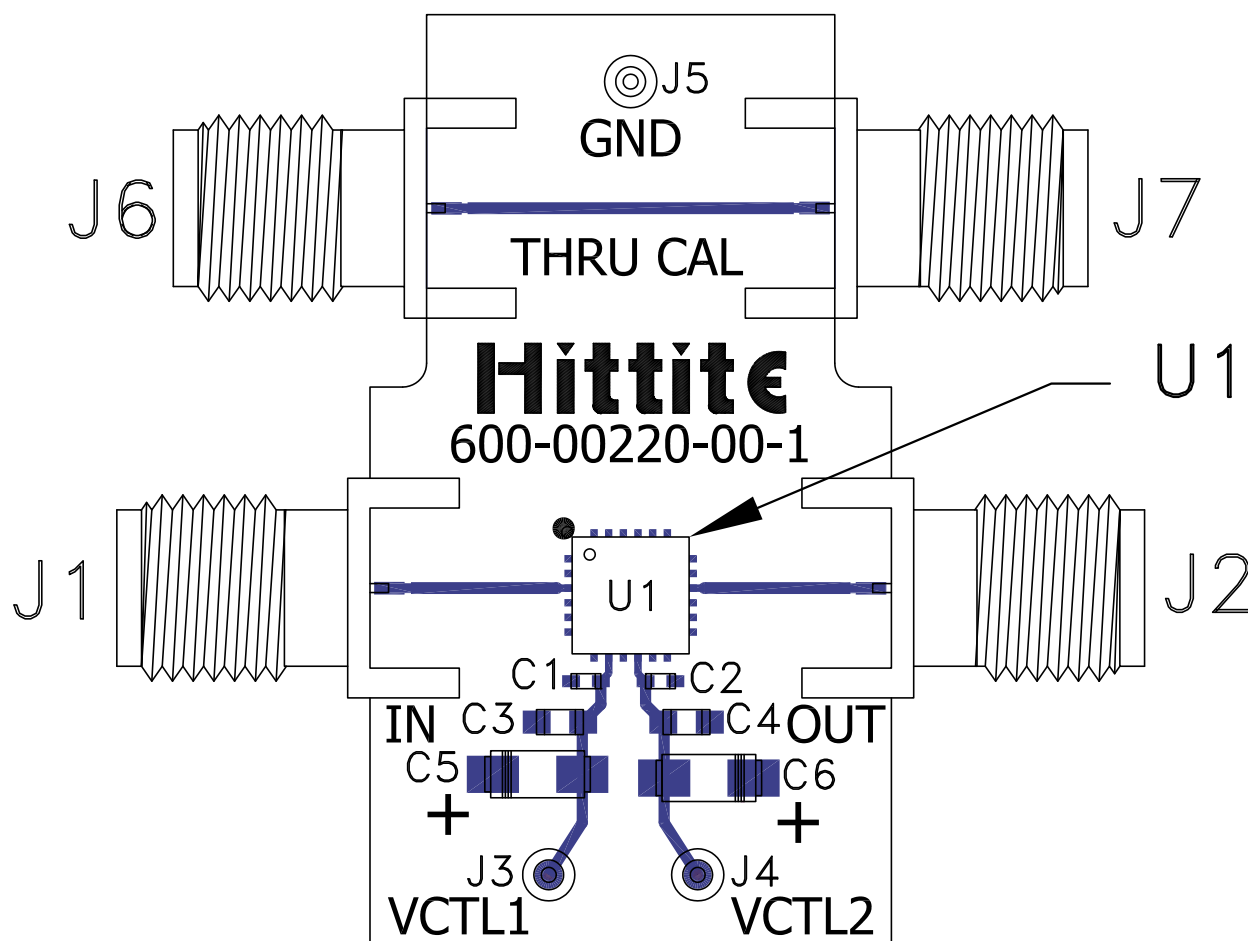Evaluation PCB**List of Materials for Evaluation PCB EVAL01-HMC985LP4KE ^[1]**

Item	Description
J1-J2, J6-J7	K Connectors.
J3-J5	DC Pins.
C1-C2	100pF Capacitors, 0402 Pkg.
C3-C4	0.01 μ F Capacitor, 0603 Pkg.
C5-C6	4.7 μ F Case A, Tantalum.
U1	HMC985LP4KE VVA.
PCB	600-00220-00 Evaluation PCB.

[1] Reference this number when ordering complete evaluation PCB

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



MICROWAVE CORPORATION v01.0813



HMC985LP4KE

**GaAs MMIC VOLTAGE - VARIABLE
ATTENUATOR, 10 - 40 GHz**

Notes:

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com