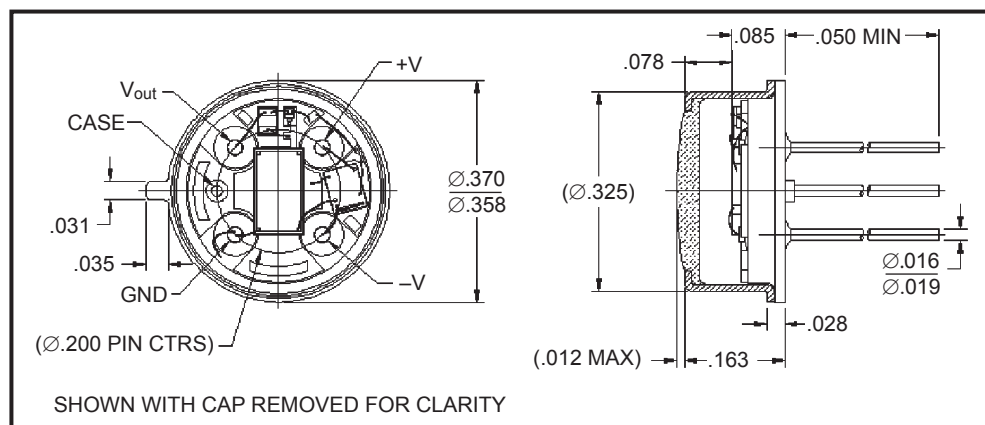
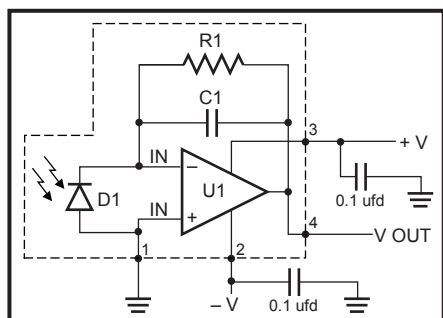


**FEATURES**

- Large active area
- Low noise
- High sensitivity
- Custom gains available
- Hermetically sealed TO-39

**ELECTRO-OPTICAL CHARACTERISTICS AT 23°C**

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Dark Offset	$V_s = \pm 5\text{ V}$		1.2	± 2	mV
Dark Offset Noise	$V_s = \pm 5$ BW = 0.1 to 1000 Hz		198	250	$\mu\text{V rms}$
Sensitivity	$V_s = \pm 5\text{ V}$ $\lambda = 940\text{ nm}$	55	63		$\text{V}/\mu\text{W}$
Frequency Response (-3 db)	$V_s = \pm 5\text{ V}$ $\lambda = 940\text{ nm}$	900	1000		Hz
NEP	$\lambda = 940\text{ nm}$		0.08		$\text{pW}/\sqrt{\text{Hz}}$
Transimpedance Gain			100		$\text{M}\Omega$
Supply Current			850	950	μA

ABSOLUTE RATINGS

Voltage Supply Range +V to -V*	5 to 15V
Power Dissipation	15 mW
Storage and Operating Temperature	-25° to +100° C
Soldering Temperature (1/16" from case for 3 seconds max)	+260° C


* Voltage supply across the device requires a minimum of 5V to a maximum of 15V from +V to -V.



1260 Calle Suerte, Camarillo, California 93012

Phone: (805) 499-0335, Fax: (805) 499-8108

Email: sales@optodiode.com, Website: www.optodiode.com

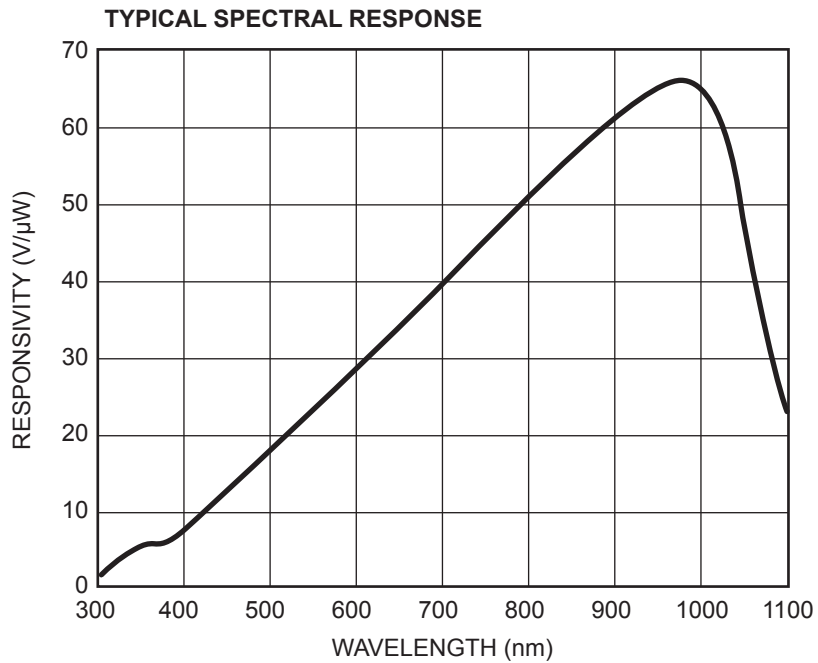

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com