

Electrical / Environmental

- Operating Temperature Range -40°C to +130°C
- Ambient Temperature, Maximum 80°C
- Insulation System Class F, 155°C
- Operating Frequency Up to 3MHz

HM65

High Current Low Profile Surface Mount Inductors




Specifications / Packaging

Part Number	Inductance ⁽¹⁾	Rated DC Current ⁽²⁾		Heating Current ⁽³⁾	DC Resistance ⁽⁴⁾		Case Size	Ht Height mm Max.	13" Reel Qty (Units)
	Nominal µH ± 20%	25°C	130°C		mΩ Typ.	mΩ Max.			
HM65-H1R0LF	1.0	20.0	13.5	19.9	1.7	2.5	Standard	5.6	400
HM65-H1R8LF	1.8	15.3	11.5	15.2	2.9	3.4	Standard	5.6	400
HM65-H2R8LF	2.8	12.3	10.5	12.1	4.6	5.4	Standard	5.6	400
HM65-H3R9LF	3.9	10.5	8.3	11.4	5.2	8.0	Standard	5.6	400
HM65-H4R0LF	4.0	10.3	8.0	11.4	5.2	8.0	Standard	5.6	400
HM65-H5R6LF	5.6	8.8	7.5	8.1	10.2	11.4	Standard	5.6	400
HM65-H6R0LF	6.0	8.0	6.5	8.1	10.2	11.4	Standard	5.6	400
HM65-H7R2LF	7.2	7.8	6.0	7.8	11.4	13.5	Standard	6.0	400
HM65-1R5LF	1.5	14.0	10.5	17.1	1.7	2.5	Standard	5.6	400
HM65-2R5LF	2.5	10.0	8.0	15.2	2.9	3.4	Standard	5.6	400
HM65-6R0LF	6.0	6.7	4.5	11.5	5.1	8.0	Standard	5.6	400
HM65-8R2LF	8.2	5.8	4.5	8.1	10.2	11.4	Standard	5.6	400
HM65-100LF	10.0	5.0	4.0	7.8	11.3	13.5	Standard	5.6	400
HM65-P1R0LF	1.0	20.0	20.0	19.9	1.7	2.5	Standard	6.0	400
HM65-P1R2LF	1.2	18.0	18.0	19.9	1.7	2.5	Standard	6.0	400
HM65-P1R8LF	1.8	16.0	16.0	15.2	2.9	3.4	Standard	6.0	400
HM65-P2R5LF	2.5	10.0	10.0	15.2	2.9	3.4	Standard	6.0	400
HM65-M0R5LF	0.5	29.0	24.0	16.3	1.8	2.2	Mini	5.6	500
HM65-M0R8LF	0.8	20.0	16.0	16.3	1.8	2.2	Mini	5.6	500
HM65-M2R5LF	2.5	12.0	10.0	9.3	5.5	6.0	Mini	5.6	500





- Notes: (1) Inductance is measured at 100kHz, 0.1V without DC current.
(2) Rated DC current is the approximate current at which inductance will be decreased by 25% from its initial (zero DC) value.
(3) Heating current is the DC current which causes the inductor temperature to increase by approximately 40°C.
(4) DC resistance is measured at 25°C.

Outline Dimensions (mm)

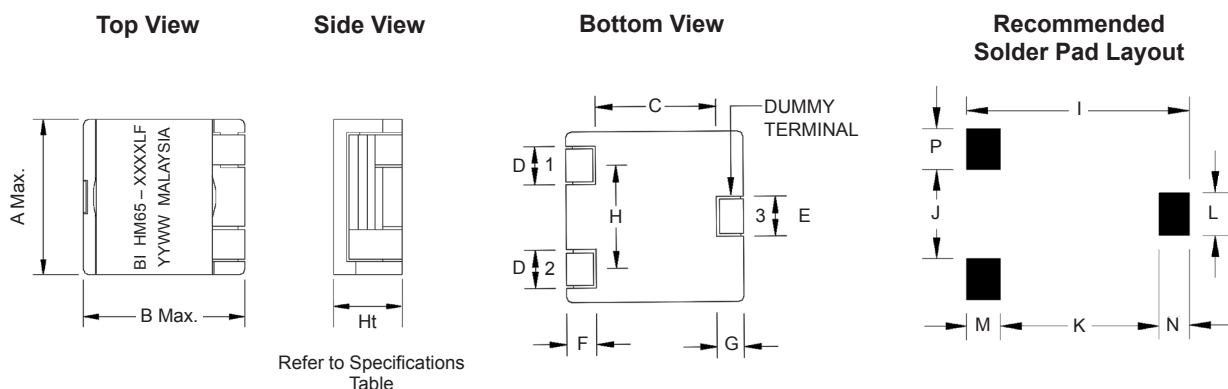

Case Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P
Standard	12.5	13.5	7.3	2.6	2.6	2.6	2.6	7.4	13.9	4.4	6.9	3.0	3.8	3.2	3.0
Mini	10.4	10.4	6.7	2.6	1.5	2.3	1.1	5.5	10.8	2.5	6.5	1.8	2.8	1.5	3.0

Electrical Characteristics @ 25°C

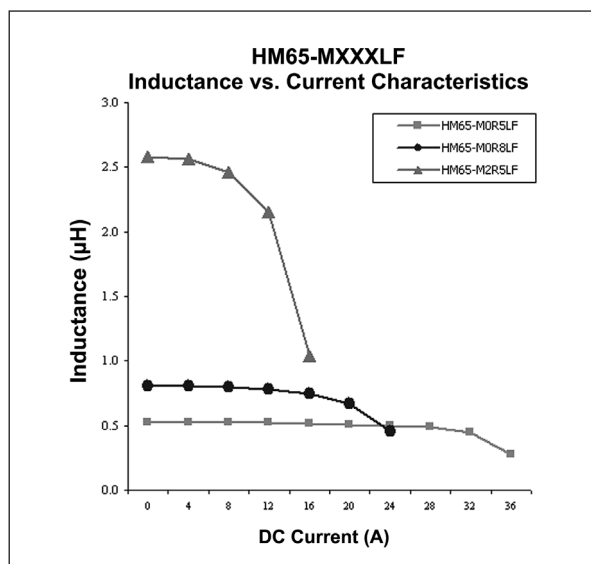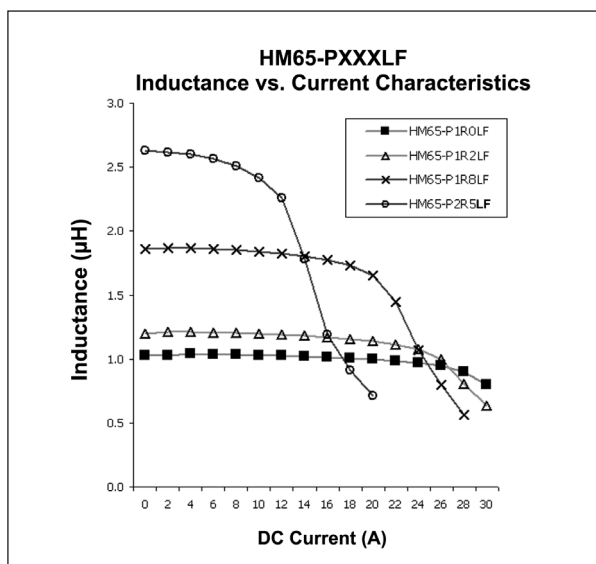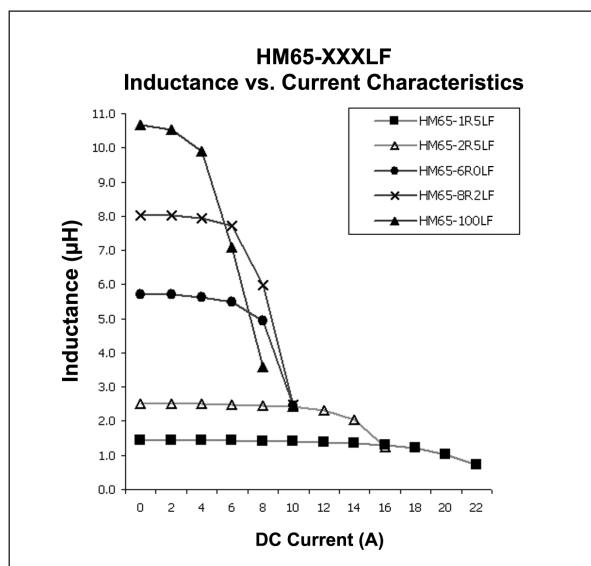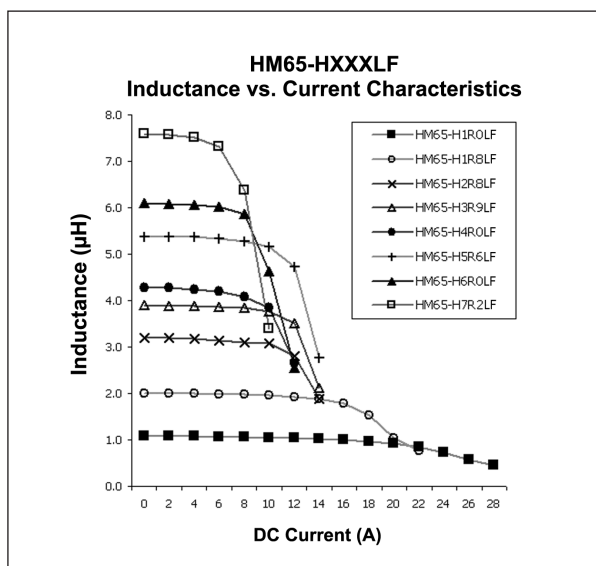

Ordering Information

HM65 - H 1R0 LF TR13

Model Series: HM65

Type: H = High Current
P = Premium Core Material
M = Mini-Package

Inductance Code: 1R0
First 2 digits are significant. Last digit denotes the number of trailing zeros. For values below 10µH, "R" denotes the decimal point

Lead-Free

TR - Tape & Reel Packing
13 - 13" reel

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com