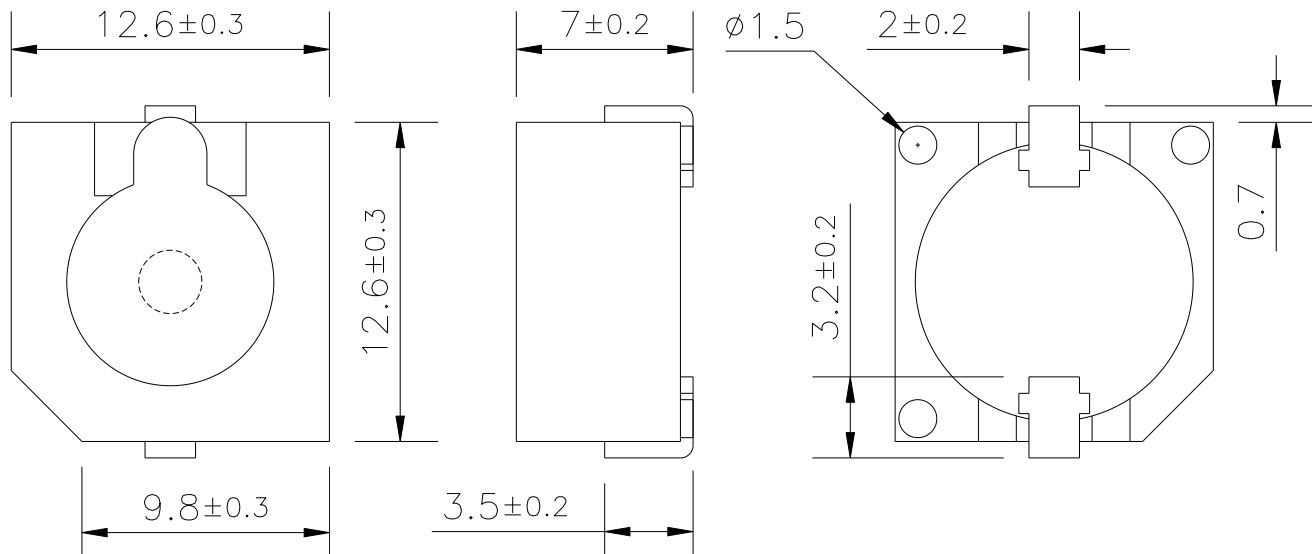


Specifications:

Oscillation Frequency (Hz)	2400 $\pm$ 400
Operating Voltage (Vp-p/max)	4.0 ~ 7.0
Rated Voltage (Vp-p)	5.0
Current Consumption Max. (mA)	50 at Rated Voltage
Sound Pressure Level Min. (dB/min)	87 at 10cm at Rated Voltage
Coil Resistance (Ω)	45 $\pm$ 8
Operating Temperature ($^{\circ}$ C)	-40 ~ +85
Storage Temperature ($^{\circ}$ C)	-40 ~ +85
Housing	PPS plastic resin (Color: Gray)
Type of Connection	SMD
Weight (Grams)	2.6
Condition by reflow soldering ($^{\circ}$ C)	245 $\pm$ 5 / 1 min
Condition by hand soldering ($^{\circ}$ C)	350 $\pm$ 20 / within 5 sec
Options	For other options contact factory

RoHS Compliant**Dimensions:** (units: mm)**Packaging:**


Parts are supplied on reels (300 pcs per tape and reel).

AST501Q, AST501TRQ, AST605Q, AST605TRQ, AST612Q, AST612Q

Direct Drive Transducer Operation:

Direct drive transducer devices do not have any included DC circuitry, so the user must apply a sine or square wave with the appropriate rated frequency. A square wave will typically result in more sound level than a sine wave. The higher the peak-to-peak voltage applied (up to the maximum rated voltage), the higher the resulting sound level.

Frequency Response:

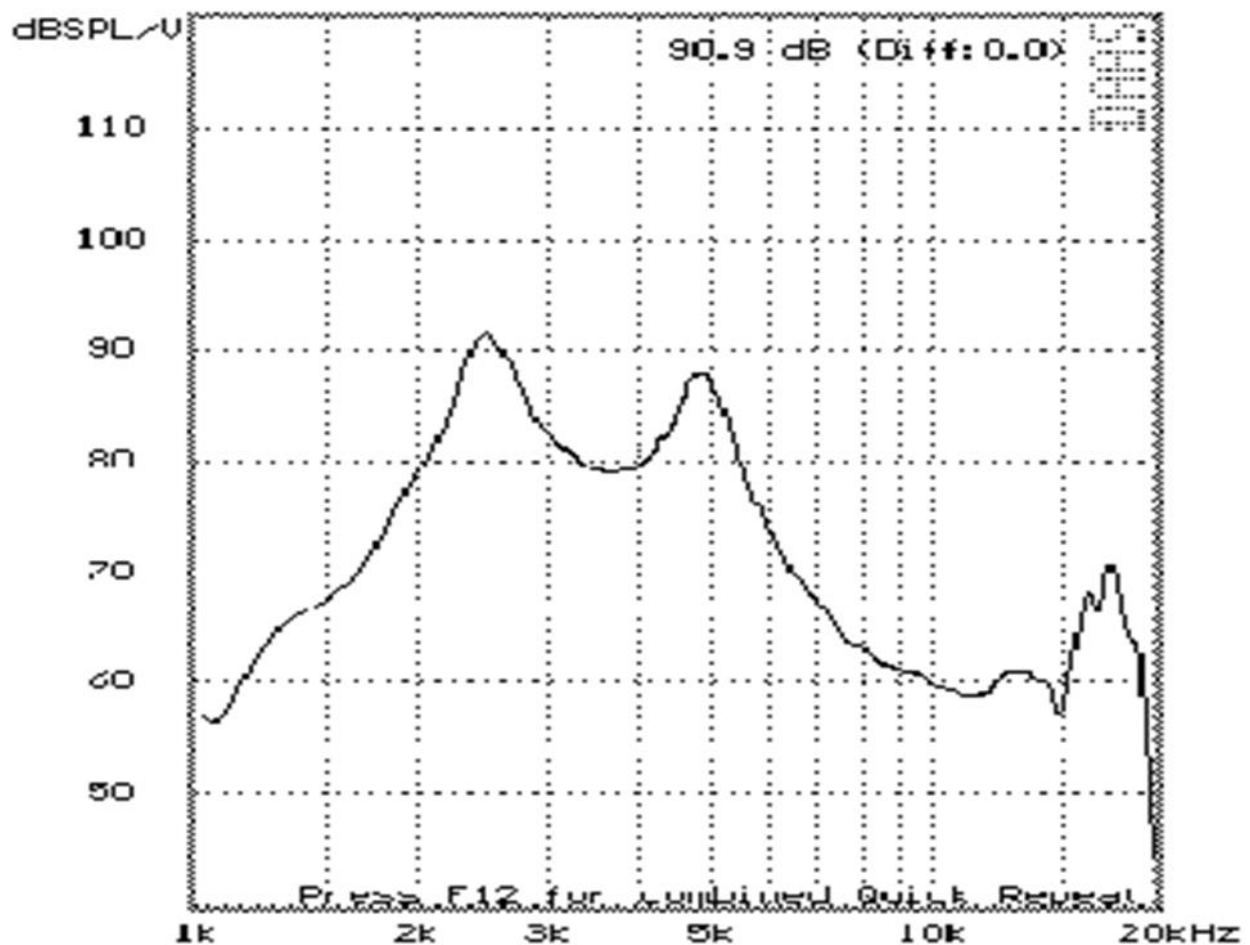

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com