

Commercial

15 mm Diameter

Carbon Composition

Trimmer Potentiometer

Features

- Miniature size — knob 19/32" (15.08mm) diameter
- Printed circuit mounting with knob parallel or perpendicular to printed circuit board
- Wide resistance range
- Knob slotted for screwdriver adjustment
- Reliable CTS composition resistance element
- Low cost
- RoHS compliant



Electrical and Mechanical Specifications

Resistance Range

500Ω through 5 Megohms
Fixed resistor available

Resistance Tolerance

±30%, ±20%, ±10%

Power Rating, Watts

1/4 watt @ 55°C (resistance up to 5000Ω)
1/5 watt @ 55°C (resistance above 5000Ω)

Voltage Rating

350 VDC

Angle of Rotation

260°

Turning Torque

Standard: 3/4 to 6 in-oz (54 – 432 gf-cm)
Special: 2 to 7 in-oz (144 – 505 gf-cm)

Operating Temperature

-35°C ~ 85°C

Stop Strength

2 1/2 in-lb (2.9 kgf-cm min.)

Adjusting Knob Information

Diameter: 19/32" (15.08mm)

Trim:

Knob Periphery	Knob Adjustmeent	CTS Type
<i>Standard:</i>		
Smooth round	Slotted — front or rear screwdriver adjust	201 R


Standard Color: Blue

Mounting Information

Type 201U for mounting control with knob parallel to printed circuit board.
Type 201X for mounting control with knob perpendicular to printed circuit board.


Type 201XR

DIMENSION: $\frac{\text{mm}}{\text{INCH}}$

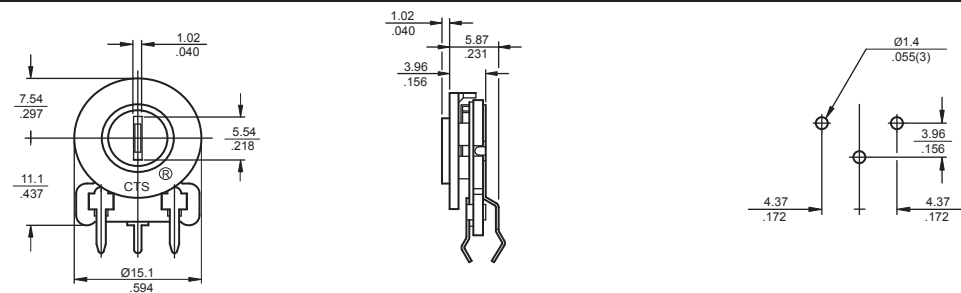


Type 201UR

DIMENSION: $\frac{\text{mm}}{\text{INCH}}$

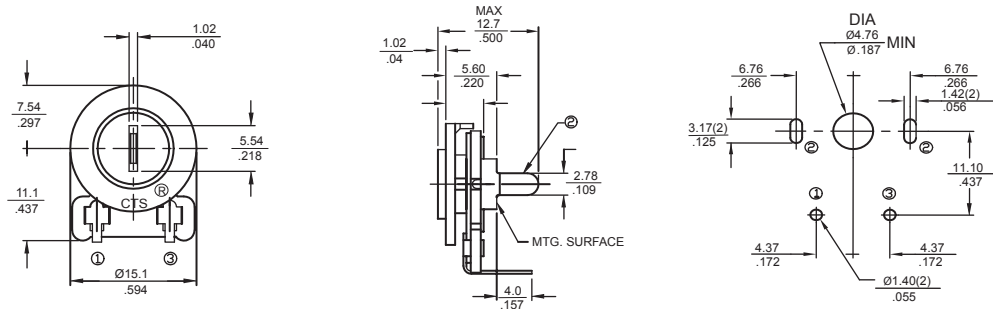

Ordering Information

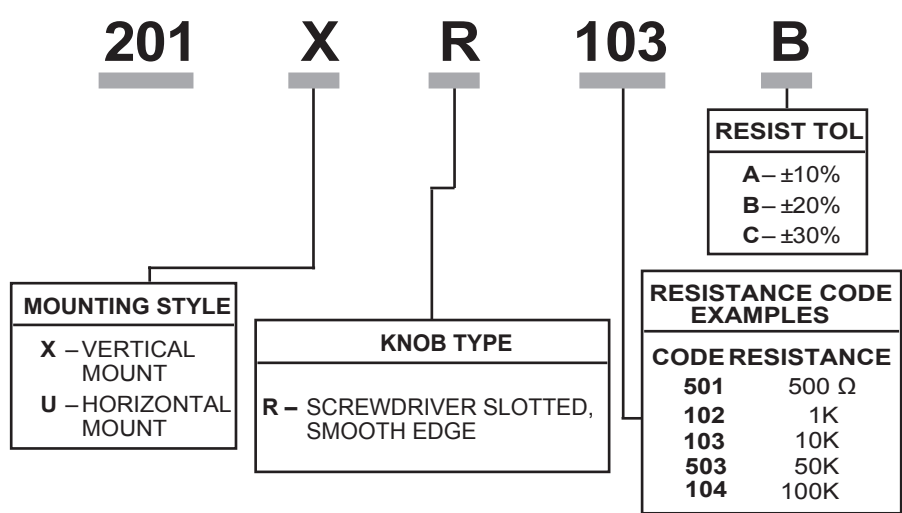

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com