
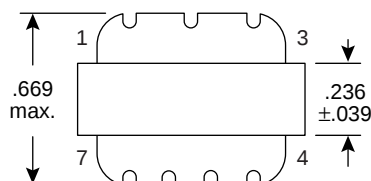

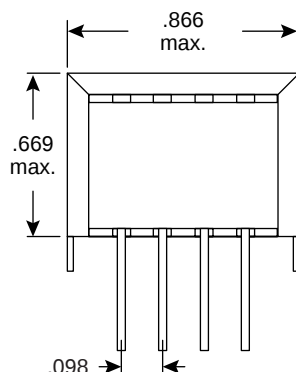
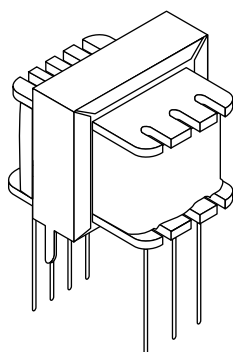


Dimensions (In.)

Specifications:

- Maximum output: 200mW
- Frequency response: ± 2 dB 300HZ-3, 4KHZ @ 1kHz 0dB
- Insulation resistance: $>10M\Omega$ @ 100VDC
- Breakdown voltage: 100VAC hipot for 1 minute
- Impedance ratio: Pri 600 Ω CT, Sec₁ 600 Ω , Sec₂ 600 Ω
- Impedance variation: $\pm 10\%$ @ 1kHz, .25V
- Primary wire: $\varnothing.08$ mm x 2 turns 320 ref.
- Secondary wire: $\varnothing.08$ mm x 2 turns 640 ref.
- DC resistance: Pri 78 Ω $\pm 15\%$, Sec₁ (6-7) 65 Ω $\pm 15\%$, Sec₂ (4-5) 60 Ω $\pm 15\%$
- Core type: EI-19
- Heat tolerance: +80°~+90°C
- Wave solderable
- Waxing: vacuum treatment

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com