


DC/DC CONVERTER CONTROL IC

■ GENERAL DESCRIPTION

The NJM2360 is a DC to DC converter control IC. Due to the internalization of a high current output switch, 1.5A switching operations are available. The NJM2360 is designed to be incorporated in step-up, step-down and inverting applications with a minimum number of external components. Output current is limited by an external resistor.

■ PACKAGE OUTLINE



NJM2360D




NJM2360M

■ FEATURES

- Operating Voltage (2.5V~40V)
- Low Standby Current
- Current Limiting
- Output Switch Current to 1.5A
- Supply Voltage V^+ 2.5~40V
- Output Voltage V_{OR} 1.25~40V
- Oscillator Frequency f_{osc} 100Hz~100kHz
- Package Outline DIP8, DMP8
- Bipolar Technology


■ PIN CONFIGURATION

NJM2360D
NJM2360M

PIN FUNCTION

1. C_S
2. E_S
3. C_T
4. GND
5. INV_{IN}
6. V^+
7. S_I
8. C_D

■ BLOCK DIAGRAM

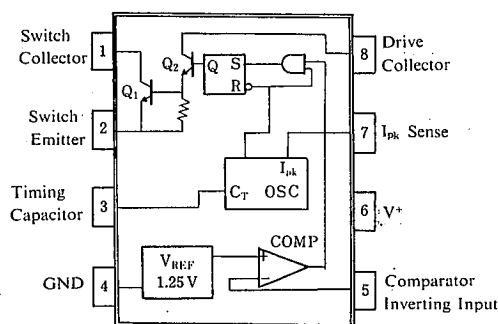

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	40	V
Comparator Input Voltage Range	V _{IR}	-0.3 ~ V ⁺	V
Power Dissipation	P _D	(DIP8) 700	mW
		(DMP8) 600 (note 1)	mW
Switch Current	I _{sw}	1.5	A
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C

(note 1) At on PC board

■ ELECTRICAL CHARACTERISTICS

- DC Characteristics (V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC}	5V ≤ V ⁺ ≤ 40V, C _T =0.001μF S _I =V ⁺ , IN V _{IN} > V _{th} , E _S =GND	—	2.4	3.5	mA

Oscillator

Charge Current	I _{chg}	5V ≤ V ⁺ ≤ 40V	20	35	50	μA
Discharge Current	I _{dischg}	5V ≤ V ⁺ ≤ 40V	150	200	250	μA
Voltage Swing	V _{OSC}		—	0.5	—	V _{P-P}
Discharge to Charge Current Ratio	I _{dischg} /I _{chg}	S _I =V ⁺	—	6	—	—
Peak Current Sense Voltage	V _{IPK(sense)}	I _{chg} =I _{dischg}	250	300	350	mV

Output Switch (Note 2)

Saturation Voltage 1	V _{CE(sat)1}	Darlington Connection (C _S =C _D) I _{sw} =1.0A	—	1.0	1.3	V
Saturation Voltage 2	V _{CE(sat)2}	I _{sw} =1.0A, I _{C(driver)} =50mA (Forced β ≈ 20)	—	0.5	0.7	V
DC Current Gain	h _{FE}	I _{sw} =1.0A, V _{CE} =5.0V	35	120	—	—
Collector Off-State Current	I _{C(off)}	V _{CE} =40V	—	10	—	nA


Comparator

Threshold Voltage	V _{th}		1.18	1.25	1.32	V
Input Bias Current	I _{IB}	V _{IN} =0V	—	40	400	nA

Note 2 : Output switch tests are performed under pulsed conditions to minimize power dissipation.


■ TYPICAL APPLICATIONS

1. Step-Up Converter:

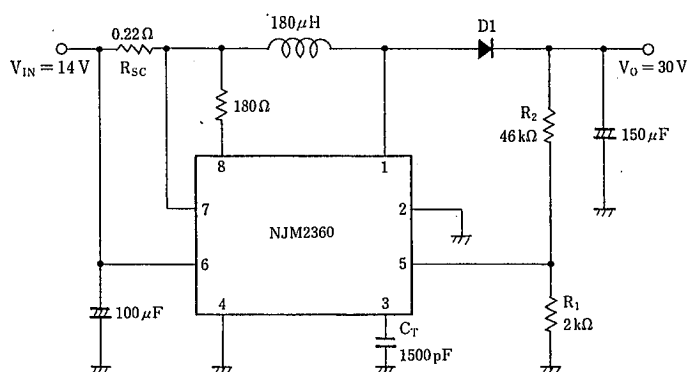

* D1 : SBD(EK14)


2. Step-Down Converter

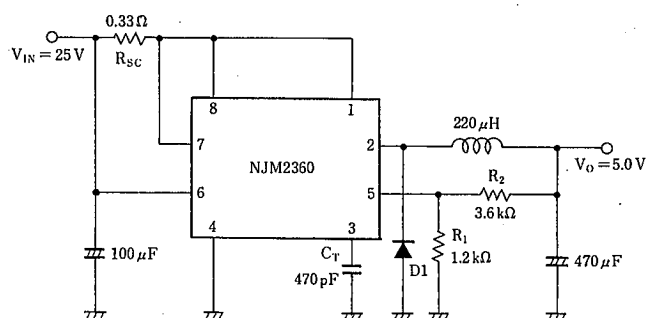


* D1 : SBD(EK14)

TYPICAL APPLICATIONS


3. Step-Up Converter (High Current)

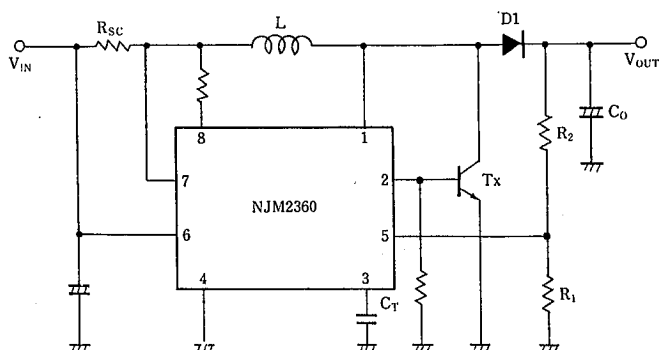

4. Step-Down Converter (High Current)

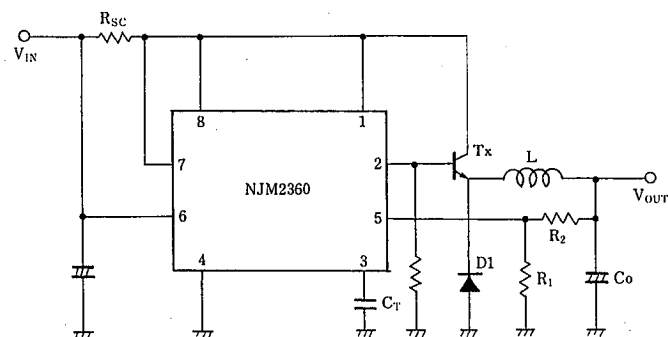

5. Inverting Converter

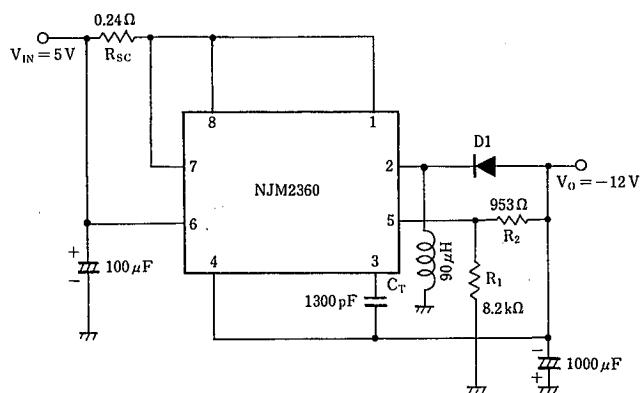

* D1 : SBD(EK14)

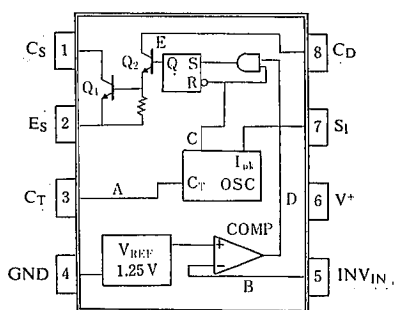


Fig.1 Block Diagram


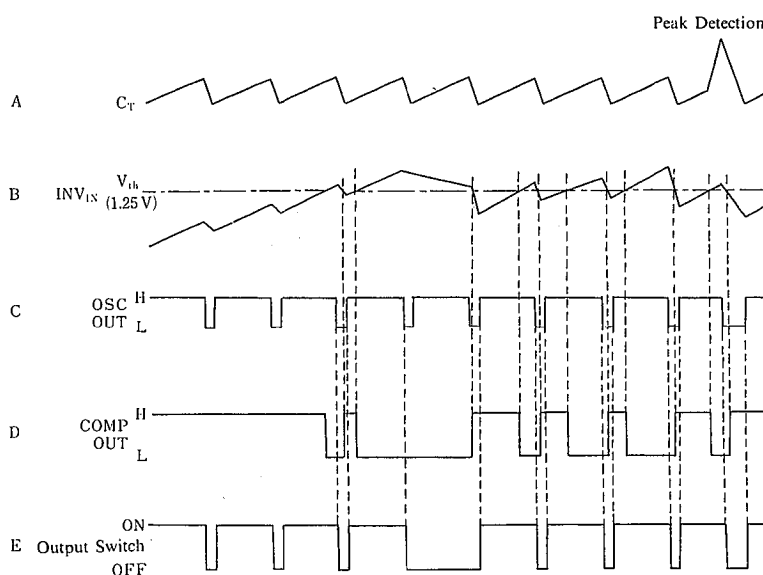



Fig. 2 Timing Chart

■ POWER DISSIPATION VS. TEMPERATURE

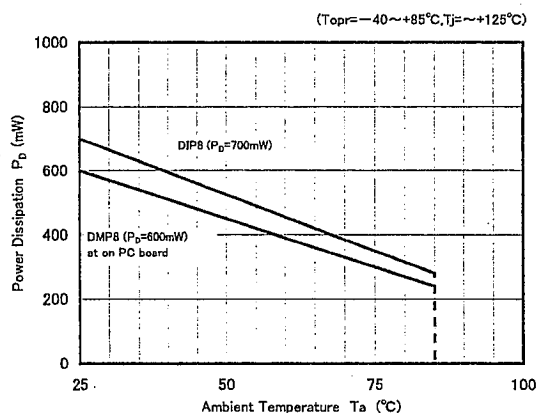


TYPICAL CHARACTERISTICS


Oscillator Frequency vs. Timing Capacitor

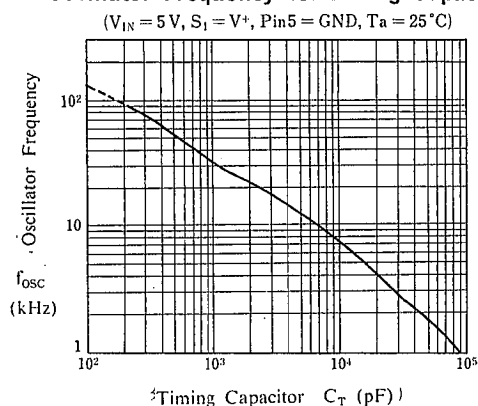


Switching Time vs. Timing Capacitor

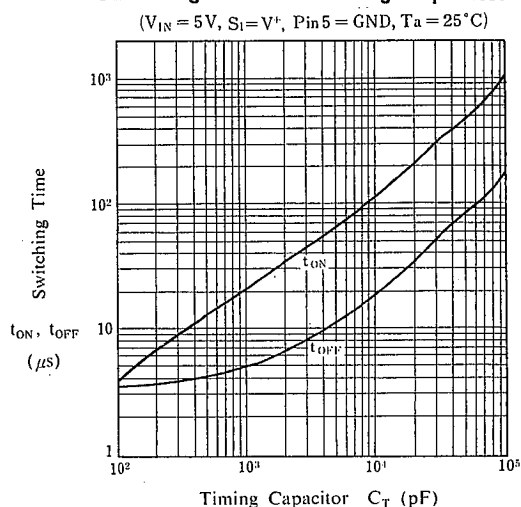


Operating Current vs. Operating Voltage

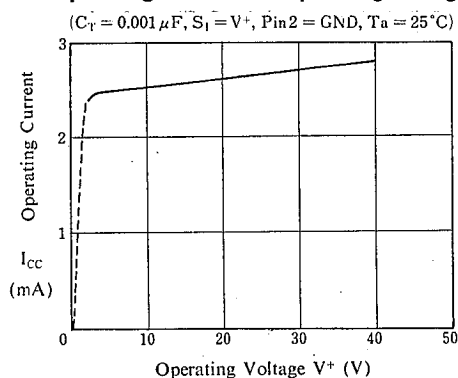


Switch Saturation Voltage 2 vs. Collector Current

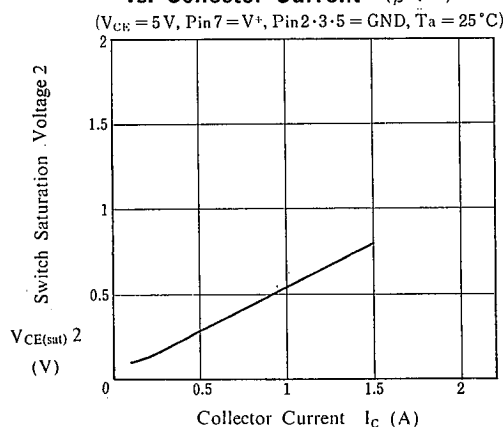

Switch Saturation Voltage 1 vs. Collector Current

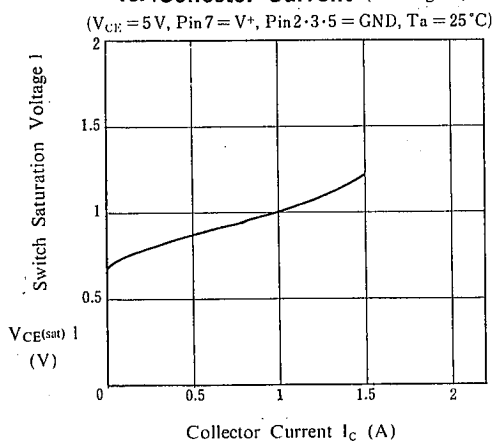


Saturation Voltage 1 vs. Temperature

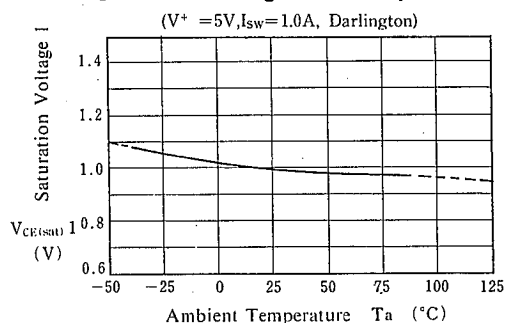

■ TYPICAL CHARACTERISTICS


Saturation Voltage 2 vs. Temperature

($V^+ = 5\text{ V}$, $I_{SW} = 1.0\text{ A}$)

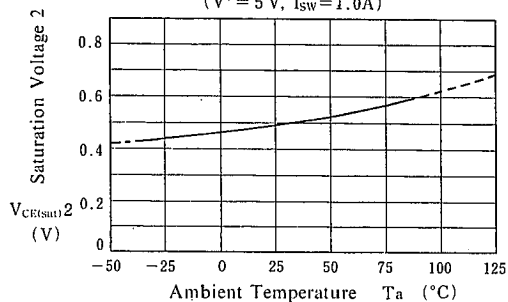


Operating Current vs. Temperature

($V^+ = 5\text{ V}$, $C_T = 0.001\mu\text{F}$)

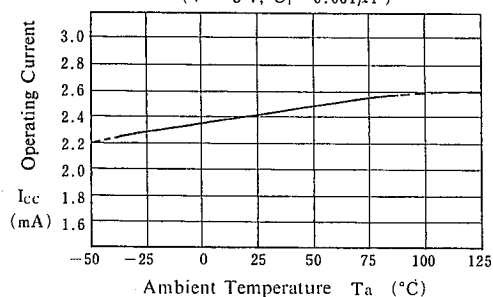


Discharge to Charge Current Ratio vs. Temperature

($V^+ = 5\text{ V}$)

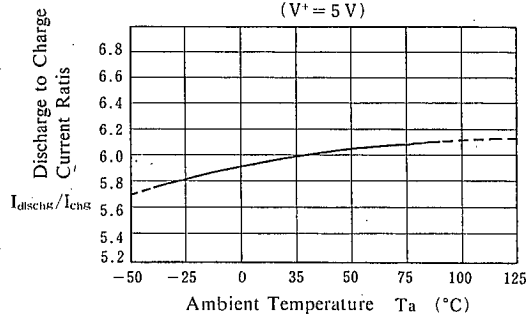

Threshold Voltage vs. Temperature

($V^+ = 5\text{ V}$)

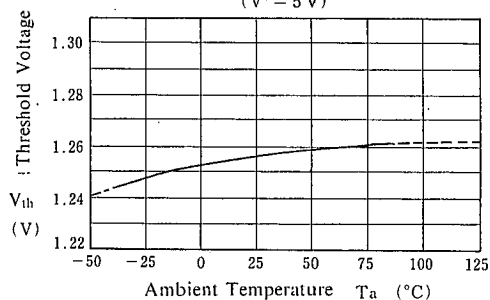


■ TYPICAL CHARACTERISTICS (Application)

1. Step-Up Converter


Output Voltage vs. Input Voltage

($V_O = 30\text{ V}$, $I_O = 100\text{ mA}$, $C_T = 1500\text{ pF}$,
 $L = 180\text{ }\mu\text{H}$, $T_a = 25^\circ\text{C}$)

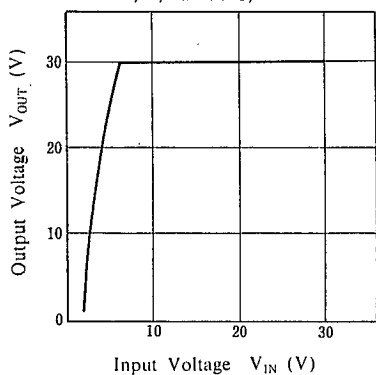

Output Voltage vs. Output Current


($V_{IN} = 14\text{ V}$, $V_O = 30\text{ V}$, $C_T = 1500\text{ pF}$,
 $L = 180\text{ }\mu\text{H}$, $T_a = 25^\circ\text{C}$)

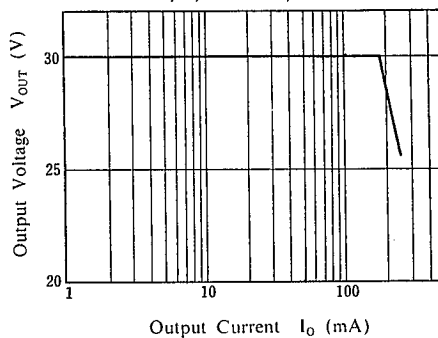

2. Step-Down Converter


Output Voltage vs. Input Voltage

($V_O = 5\text{ V}$, $I_O = 500\text{ mA}$, $C_T = 470\text{ pF}$,
 $L = 220\text{ }\mu\text{H}$, $T_a = 25^\circ\text{C}$)

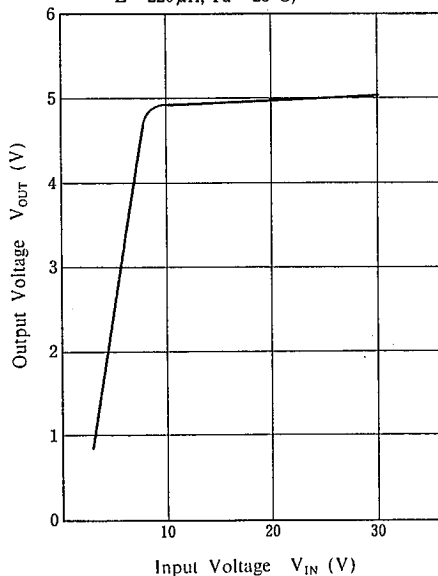

Output Voltage vs. Output Current

($V_{IN} = 25\text{ V}$, $V_O = 5\text{ V}$, $C_T = 470\text{ pF}$,
 $L = 220\text{ }\mu\text{H}$, $T_a = 25^\circ\text{C}$)

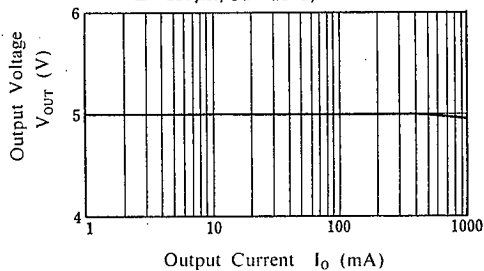

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com