


4 mm Square Double-action SMD Light Touch Switches

Type: **EVPAH**




■ Features

- External dimensions : 4.0 mm×4.1 mm, Height 0.59 mm
- Long operation life
- Wide selection of double action operating variations

■ Recommended Applications

- Camera function (Digital still cameras, Camcorders, Mobile phones, etc.) for shutter switches.

■ Explanation of Part Numbers

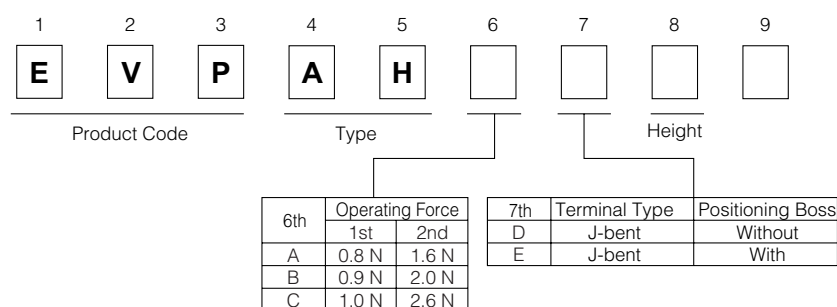







■ Specifications

Type		Snap action/Push-on type SPDT
Electrical	Rating	10 μ A 2 Vdc to 20 mA 15 Vdc (Resistive load)
	Contact Resistance	500 m Ω max.
	Insulation Resistance	100 M Ω min. (at 100 Vdc)
	Dielectric Withstanding Voltage	250 Vac for 1 minute
	Bouncing	20 ms max. (ON, OFF)
Mechanical	Operating Force	1st : 0.8 N, 0.9 N, 1.0 N 2nd : 1.6 N, 2.0 N, 2.6 N
	Travel	1st: 0.15 mm 2nd: 0.3 mm
Endurance	Operating Life	1.6 N : 100000 cycles min. 2.0 N : 100000 cycles min. 2.6 N : 30000 cycles min.
Operating Temperature		-20 °C to +70 °C
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)
Minimum Quantity/Packing Unit		8000 pcs. Embossed Taping (Reel Pack)
Quantity/Carton		40000 pcs.

■ Dimensions in mm (not to scale)



EVPAH

With J-bent terminals

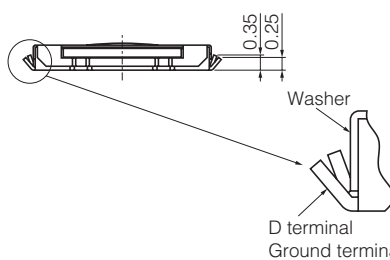

Circuit Diagram


* C or/and C' shall be used as common/ground terminal.

PWB land pattern for reference
(View from mounting side)


Please do not Provide any Land pattern in this area.

Part Numbers	Boss	Ground Terminal	Operating Force		Height	Operating Life
			1 th	2 th		
EVPAHAD6A	Without	With	0.8 N	1.6 N	0.59	100000 cycles
EVPAHBD6A	Without	With	0.9 N	2.0 N	0.59	100000 cycles
EVPAHCD6A	Without	With	1.0 N	2.6 N	0.59	30000 cycles

■ Recommended Reflow Soldering Conditions

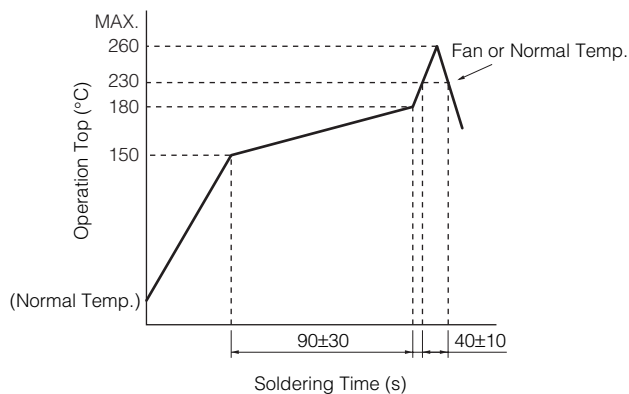


● Embossed Carrier Taping

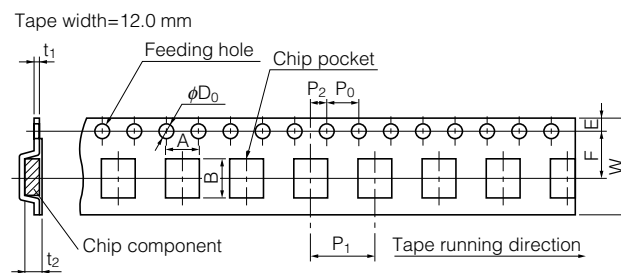

Unit: mm


Part No.	Height	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀ Dia.	t ₁	t ₂
EVPAH	0.59	4.36±0.2	4.4±0.2	12.0 ^{+0.3} _{-0.1}	5.5±0.1	1.75±0.1	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} _{-0.1}	0.3±0.05	1.25 ^{+0.2} _{-0.1}

● Standard Reel Dimensions in mm (not to scale)

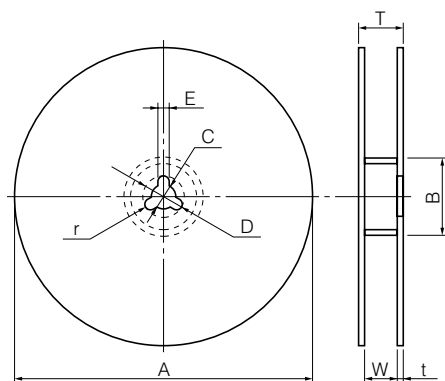


Item	A	B	C	D	E
Rate (mm)	$\phi 380.0 \pm 2.0$	$\phi 80.0 \pm 1.0$	$\phi 13.0 \pm 0.5$	$\phi 21.0 \pm 1.0$	2.0±0.5
Item	W	T	t	r	
Rate (mm)	13.5±1.0	17.5±1.0	1.0 to 3.0	1.0±0.5	

■ Recommended Shape of Test Pole

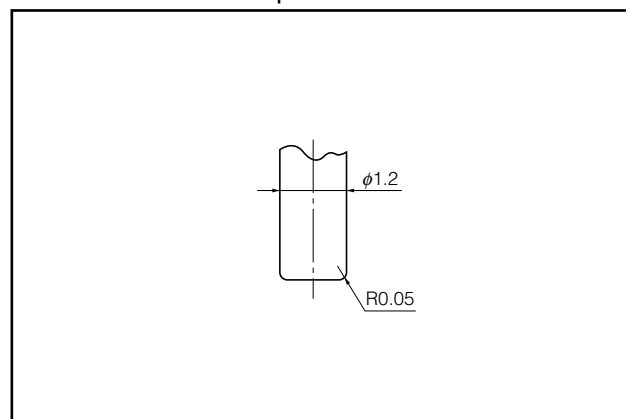

■ Recommended Operating Conditions

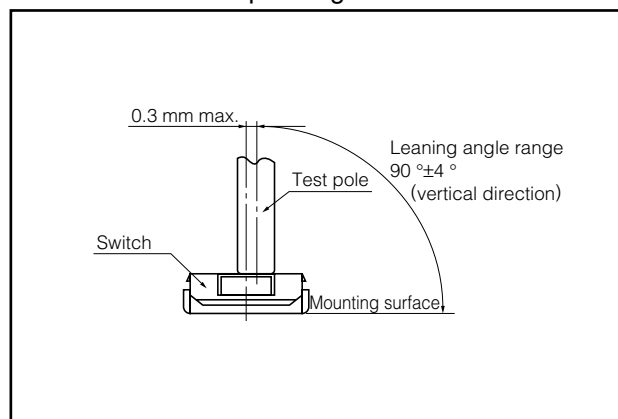

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com