
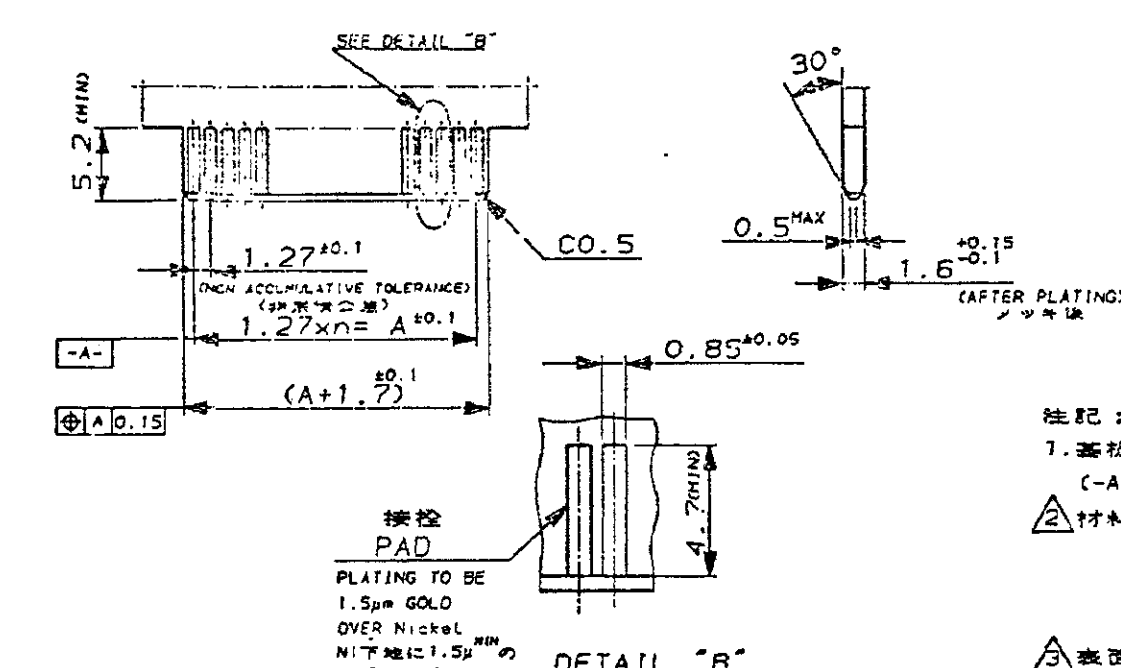
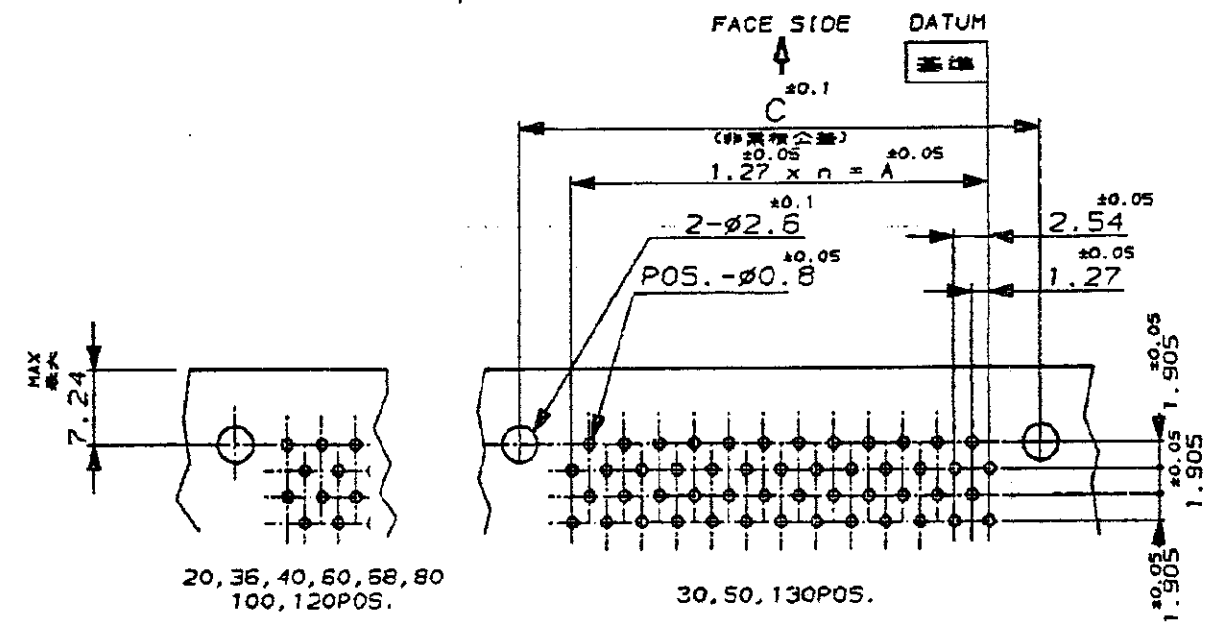
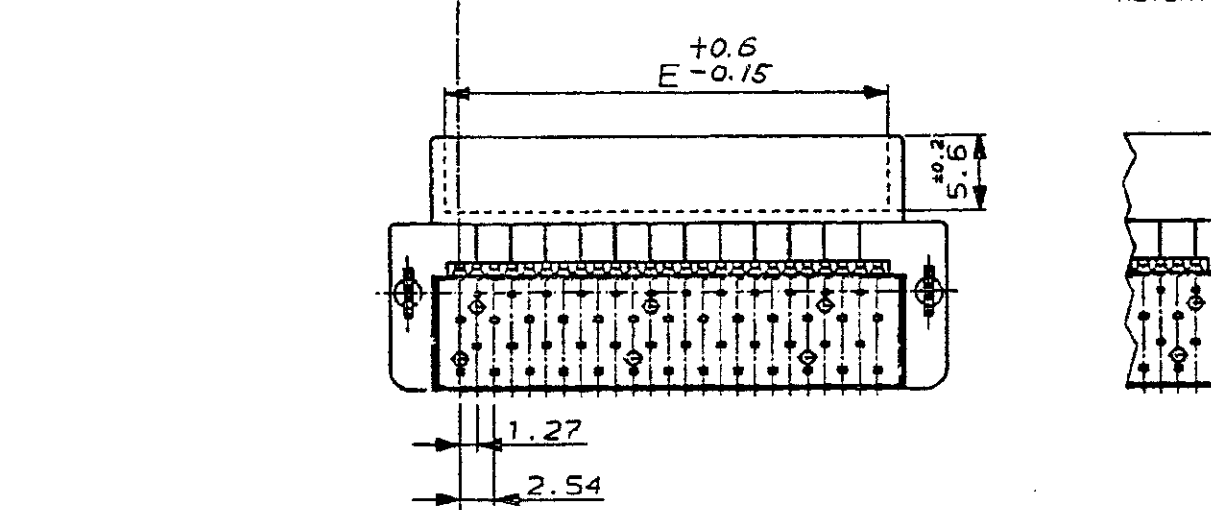
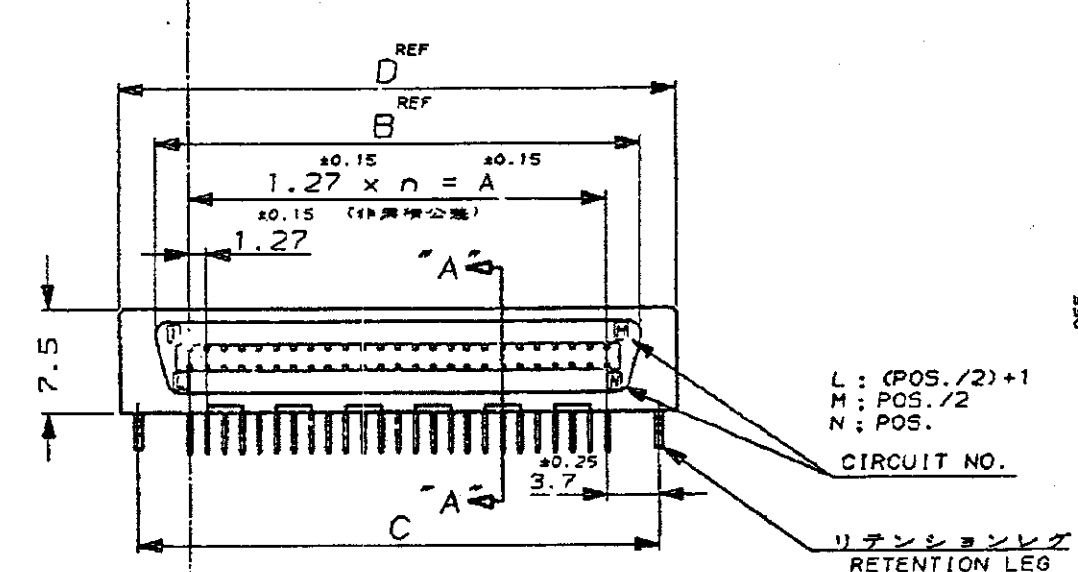


ORDER C-175474
METRIC
3-D ANGLE PROJECTION



FIG. 3.1

PRINT DIST
DIMENSIONS IN MILLIMETERS, DO NOT SCALE PRINT

8 7 6 5 4 3 2 1

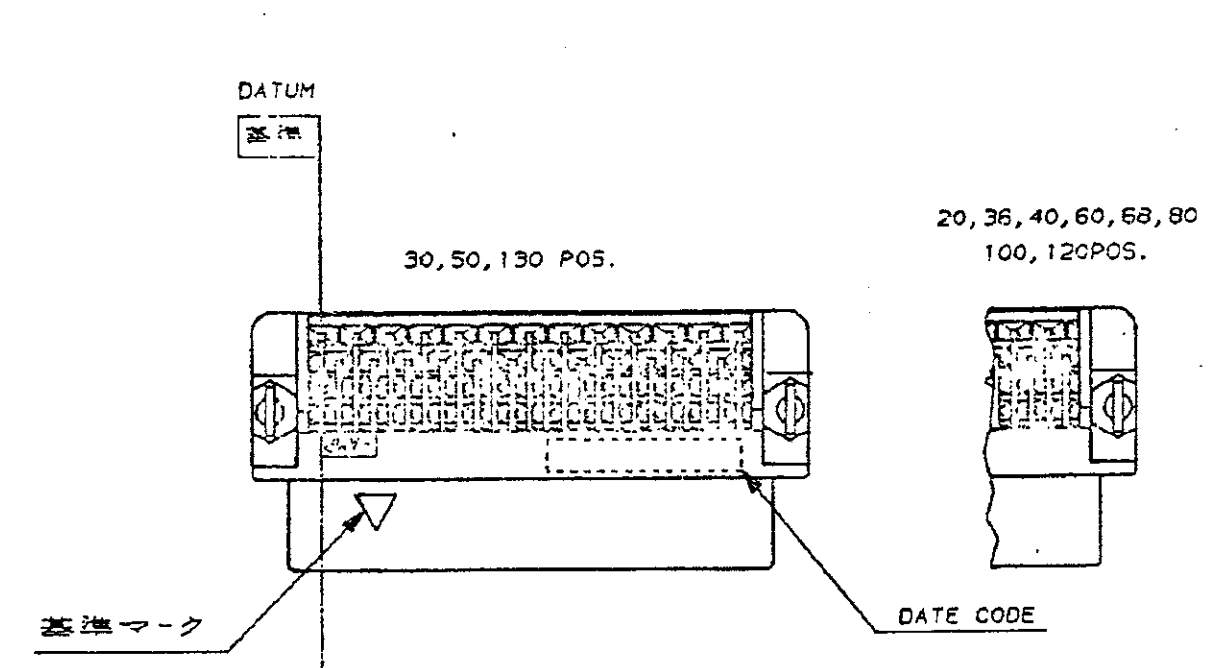

RECOMMENDED P.C. BOARD DIMENSIONS.
推奨基板寸法 (紙合用)

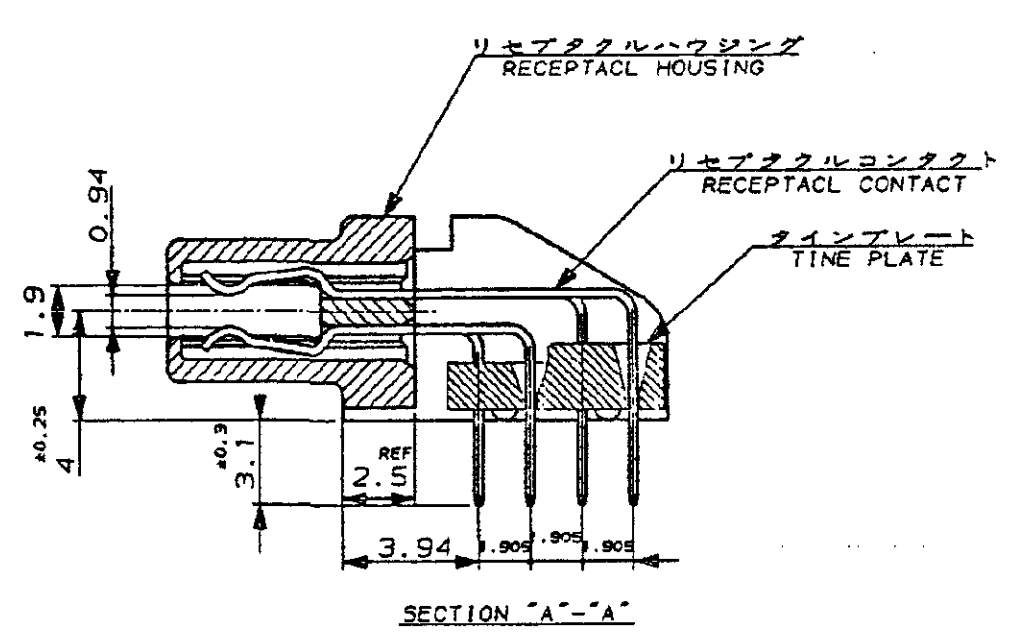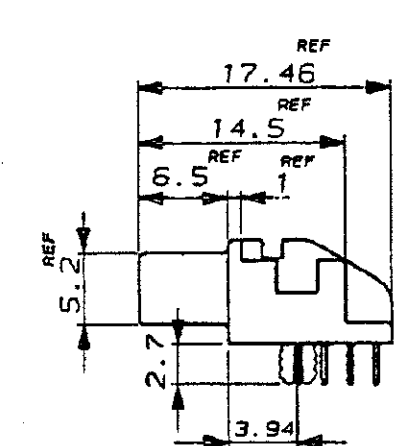

注記:
1. 基板及びコネクタの n 数は、基準位置から数える。
(AMPマーク側が図号番号1番となる。)
△材料: ハウジング: ガラス入り66ナイロン (UL 94V-0) 色、黒。
※コンタクト: 銅青銅。
※リテンションレグ: 黄銅。
△表面仕上げ:
※コンタクト: 全面1.3μ以上のニッケル下地メッキに接触部金メッキ (表参照) 脚部1μ以上の半田メッキ。
※リテンションレグ: 1.3μ以上のニッケル下地メッキに2μ以上の半田メッキ。
△カードエッジコネクタとして使用する場合、かん合用基板の厚さは、1.6であること。
NOTE
1. NUMBER "n" IS COUNTED FROM DATUM (CIRCUIT NO. 1 IS "AMP" MARK SIDE.)
△ MATERIAL: HOUSING: 66 NYLON (GF) UL 94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
RETENTION LEG: BRASS.
△ FINISH: CONTACT: AU AT CONTACT AREA (SEE TABLE), TIN LEAD AT TIME OVER NI.
RETENTION LEG: TIN LEAD UNDER NI.

△ P.C. BOARD THK MUST BE 1.6 FOR CARD EDGE CONNECTOR

6-	-2		130	64	81.28	86.82	88.68	92.48	83.18
6-	-1		120	59	74.93	80.47	82.33	86.13	75.83
6-	-0		100	49	62.23	67.77	69.63	73.43	64.13
5-	-9		80	39	49.53	55.07	56.93	60.73	51.43
5-	-8		68	33	41.91	47.45	49.31	53.11	43.81
5-	-7		60	29	36.83	42.37	44.23	48.03	38.73
5-	-6		50	24	30.48	36.02	37.88	41.68	32.38
5-	-5		40	19	24.13	29.67	31.53	35.33	26.03
5-	-3		30	14	17.78	23.32	25.18	28.98	19.68
5-	-1	0.75μ	20	9	11.43	16.97	18.83	22.63	13.33
4-	-2		130	64	81.28	86.82	88.68	92.48	83.18
4-	-1		120	59	74.93	80.47	82.33	86.13	75.83
4-	-0		100	49	62.23	67.77	69.63	73.43	64.13
3-	-9		80	39	49.53	55.07	56.93	60.73	51.43
3-	-8		68	33	41.91	47.45	49.31	53.11	43.81
3-	-7		60	29	36.83	42.37	44.23	48.03	38.73
3-	-6		50	24	30.48	36.02	37.88	41.68	32.38
3-	-5		40	19	24.13	29.67	31.53	35.33	26.03
3-	-3		30	14	17.78	23.32	25.18	28.98	19.68
3-	-1	0.5μ	20	9	11.43	16.97	18.83	22.63	13.33
1-	-2		130	64	81.28	86.82	88.68	92.48	83.18
1-	-1		120	59	74.93	80.47	82.33	86.13	75.83
1-	-0		100	49	62.23	67.77	69.63	73.43	64.13
	-9		80	39	49.53	55.07	56.93	60.73	51.43
	-8		68	33	41.91	47.45	49.31	53.11	43.81
	-7		60	29	36.83	42.37	44.23	48.03	38.73
	-6		50	24	30.48	36.02	37.88	41.68	32.38
	-5		40	19	24.13	29.67	31.53	35.33	26.03
	-4		36	17	21.59	27.13	28.99	32.79	23.49
	-3		30	14	17.78	23.32	25.18	28.98	19.68
175474-1		0.2μ	20	9	11.43	16.97	18.83	22.63	13.33

E REVISED FJ00-1313-01 T.K. J.E.		PRODUCT SPECIFICATION		AMP		Tyco Electronics AMP KK	
D REVISED ECN FJ00-1045-93 T.N.Y.F.		108-5290		Kawasaki, Japan			
C REVISED ECN J-1983 T.N.Y.F.		WIRE RANGE		INSULATION DIA		NAME	
B REVISED ECN J-12511 T.N.Y.F.		AMP (AWG - 3)		FINISH		AMP CHAMP.050 CONNECTOR (B-T-B)	
A REVISED ECN J-12103 H.K.Y.F.		MATERIAL		FINISH		RECEPTACLE CONNECTOR (HORIZONTAL WITH RETENTION LEG)	
O RELEASED ECN J-10612 S.I.Y.F.		OR. S. Ishikawa		DE. R. Nishimura		GENERAL TOLERANCE	
LTR REVISION RECORD		CHK. Y. Fujitara		APP. R. Nishimura		SIZE LOC NUMBER	
						C J C-175474	
						SCALE	
						REV. E	
						SHEET 1 OF 1	

CUSTOMER DRAWING

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com