

## HEYCO

**NO O-RING  
REQUIRED!**



### Heyco® -Tite Liquid Tight Cordgrips

**Straight-Thru, NPT Hubs with Integral Sealing Ring**


*The Ultimate in Liquid Tight Strain Relief Protection*

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.730" (44,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 3-45.
- For Heyco Liquid Tight Threaded Plugs, see page 3-49.
- Consult Heyco for cordgrips molded in other colors.


| CABLE DIA. RANGE                                                                               |              |                |              | PART NO.         |                  | DESCRIPTION                 |    | PART DIMENSIONS             |                          |                       |                        |                |      |     |      |      |      |
|------------------------------------------------------------------------------------------------|--------------|----------------|--------------|------------------|------------------|-----------------------------|---------------------------------------------------------------------------------------|-----------------------------|--------------------------|-----------------------|------------------------|----------------|------|-----|------|------|------|
| Minimum                                                                                        |              | Maximum        |              | Black            | Gray             |                             |                                                                                       | A<br>Clearance<br>Hole Dia. | B<br>Max. O.A.<br>Length | C<br>Thread<br>Length | D<br>Wrenching<br>Thk. | E<br>Flat Size |      |     |      |      |      |
| in.                                                                                            | mm.          | in.            | mm.          |                  |                  |                             |                                                                                       |                             |                          |                       |                        |                | in.  | mm. | in.  | mm.  | in.  |
| .065<br>.115                                                                                   | 1,7<br>2,9   | .210<br>.250   | 5,3<br>6,4   | M4514<br>M4516   | M4515<br>M4517   | RLTCG 1/4<br>LTCG 1/4       |    | .540                        | 13,7                     | 1.29                  | 32,8                   | .45            | 11,4 | .21 | 5,3  | .63  | 16,0 |
| .065<br>.105                                                                                   | 1,7<br>2,7   | .230<br>.315   | 5,8<br>8,0   | M3458<br>M3228   | M3459<br>M3229   | RLTCG 3/8<br>LTCG 3/8       |    | .680                        | 17,3                     | 1.41                  | 35,8                   | .49            | 12,4 | .21 | 5,3  | .82  | 20,8 |
| .095<br>.170                                                                                   | 2,4<br>4,3   | .290<br>.450   | 7,4<br>11,4  | M4518<br>M3231   | M4519<br>M3232   | RLTCG 1/2<br>LTCG 1/2       |    | .875                        | 22,2                     | 1.70                  | 43,2                   | .61            | 15,5 | .21 | 5,3  | .98  | 24,9 |
| .180<br>.260                                                                                   | 4,6<br>6,6   | .400<br>.545   | 10,2<br>13,8 | M4520<br>M3200   | M4521<br>M3201   | RLTCG LL 1/2<br>LTCG LL 1/2 |    | .875                        | 22,2                     | 1.68                  | 42,7                   | .44            | 11,2 | .25 | 6,4  | 1.06 | 26,9 |
| .250                                                                                           | 6,4          | .490           | 12,4         | M3460            | M3461            | RLTCG 3/4                   |    |                             |                          |                       |                        |                |      |     |      |      |      |
|  .420<br>.435 | 10,7<br>11,0 | .630<br>.705   | 16,0<br>17,9 | M3234GA<br>M3234 | M3235GA<br>M3235 | LTCG 3/4                    |                                                                                       |                             |                          |                       |                        |                |      |     |      |      |      |
| .490<br>.590                                                                                   | 12,4<br>15,0 | .785<br>1,000  | 19,9<br>25,4 | M8439<br>M8437   | M8439<br>M8438   | RLTCG 1<br>LTCG 1           |    | 1.326                       | 33,7                     | 2.41                  | 61,2                   | .76            | 19,3 | .30 | 7,6  | 1.73 | 43,9 |
| .787<br>.865                                                                                   | 20,0<br>22,0 | 1.020<br>1.260 | 25,9<br>32,0 | M4522<br>M4524   | M4523<br>M4525   | RLTCG 1-1/4<br>LTCG 1-1/4   |    | 1.680                       | 42,7                     | 2.69                  | 68,3                   | .78            | 19,8 | .30 | 7,6  | 2.05 | 52,1 |
| 1.000<br>1.230                                                                                 | 25,4<br>31,2 | 1.240<br>1.560 | 31,5<br>39,6 | M3319<br>M3317   | M3320<br>M3318   | RLTCG 1-1/2<br>LTCG 1-1/2   |   | 1.920                       | 48,8                     | 2.81                  | 71,3                   | .77            | 19,6 | .36 | 9,1  | 2.46 | 62,5 |
| 1.160<br>1.450                                                                                 | 29,5<br>36,8 | 1.350<br>1.730 | 34,3<br>43,9 | M3323<br>M3321   | M3324<br>M3322   | RLTCG 2<br>LTCG 2           |  | 2.400                       | 60,8                     | 2.93                  | 74,3                   | .79            | 20,1 | .42 | 10,7 | 2.73 | 69,3 |

Standard colors black and gray.


**NEW!**



**SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING**



**INTEGRAL SEALING RING**

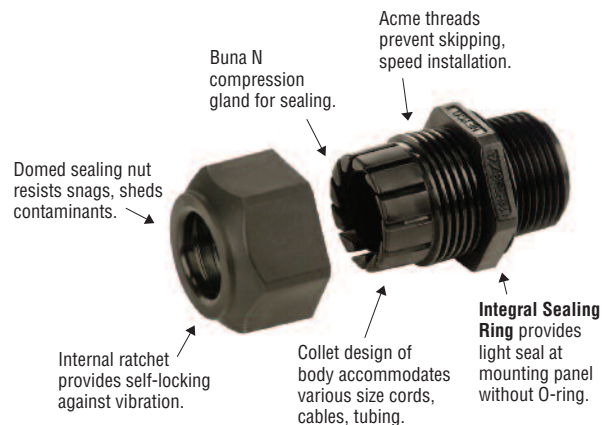

|                     |                                                                                                                                                                                                                                                                       |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material            | Nylon 6/6 w/Buna N or TPE Sealing Gland                                                                                                                                                                                                                               |
| Certifications      | <ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>CS Certified By Canadian Standard Association File 93876C</li> </ul> |
| Flammability Rating | 94V-2-Consult factory for V0 material                                                                                                                                                                                                                                 |
| Temperature Range   | Static -40°F (-40°C) to 239°F (115°C)<br>Dynamic -4°F (-20°C) to 212°F (100°C)                                                                                                                                                                                        |
| IP Rating           | IP 68 (70 PSI, 5 BAR)                                                                                                                                                                                                                                                 |

*Quick  
Specs*

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com