#### SPECIFICATIONS

Material: Boot: APM-RUBRGLAS (transparent silicone rubber)

conforms to A-A-59588, Class III Grade 50. Temperature Range: HEXSEALS: -94°F to +400°F **Pressure Range**: Dust tight and splashproof.

Resistant to: Salt spray, weather, sunlight, ozone, corona and


most acids. Shelf Life: Excess of 25 years.

Operational Life: 10,000 actuations, minimum.

#### Notes:

- 1. Mounting screws are supplied in lengths shown unless otherwise specified.
- 2. New sizes and types of RUBRGLAS-SEELS ® are being added

regularly. Please request other types and styles as required. **Agency Recognition**: Front Panel mounted Circuit Breaker Boots are UL-listed to UL Std. 50, types 1, 2, 3, 12, 12K, and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1. Also meet CSA standards.

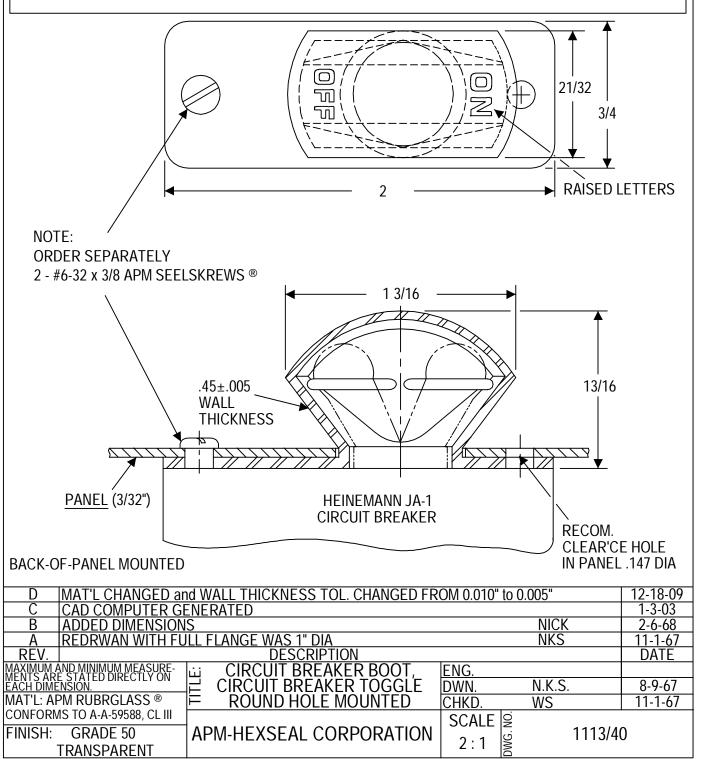

# AMEYA360 Components Supply Platform

## **Authorized Distribution Brand:**

























#### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

### Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

### ➤ Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

### Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com