



## Secure iLAN™ Serial-to-Ethernet Device Server

### General Description:

Secure iLAN™ is a secure serial-to-Ethernet device server that enables installed serial devices to connect via a serial port to the Internet over a 10/100BaseT Ethernet LAN. Secure iLAN acts as a security gap between the host application and the network.

Secure iLAN eliminates the need for any hardware modifications to the host device. Simply connect a serial cable from Secure iLAN's RS232 or RS485 connector to your device, and an Ethernet cable from your local area network to Secure iLAN's RJ-45 connector.

The Internet engine inside Secure iLAN is Connect One's remotely updateable iChip™ CO2128 Secure Internet Controller™.

Connect One's AT+i™ protocol eliminates the need for Internet programming and minimizes changes to the host application. Connect One's SerialNET™ operating mode completely eliminates the need for changes to the host application, as it is a true plug-and-play operating mode.

Secure iLAN provides one secure SSL3/TLS1 socket, up to 10 simultaneous active TCP/UDP sockets, and two listening sockets. It also includes an HTTP web server with two websites: one for configuration and one for the application.

Secure iLAN is powered by an external 9VDC power supply. Alternatively, it can be powered through pin 9 of the RS232/RS485 connector to the host device.

### Application Program Interface:

- Connect One's AT+i protocol
- SerialNET mode for transparent serial data-to-Internet bridging

### Internet Protocols:

ARP, ICMP, IP, UDP, TCP, DHCP, DNS, NTP, SMTP, POP3, MIME, HTTP, FTP and TELNET

### Security Protocols:

SSL3/TLS1, HTTPS, FTPS, RSA, AES-128/256, 3DES, RC-4, SHA-1 and MD-5

### Protocols Accelerated in HW:

AES, 3DES and SHA

### Hardware Description:

- Size: 110x67x28mm (4.3x2.6x1.1")
- Weight: 96g (3.4 oz.)
- Operating Humidity: 90% maximum (non-condensing)
- Operating Temperature Range: 5° to 50°C (41° to 122°F)
- Power Supply Input: 6-24VDC. 9V power supply included unless otherwise specified. Power from host device optionally available through pin 9 of serial connector.
- Power Consumption: 0.8W @ 9VDC
- LEDs:
  - LNK – Link status
  - ACT – LAN activity
  - SNET – SerialNET mode activity
  - PWR – Power
- Connectors: RS232/RS485, RJ-45, 2.1mm power jack
- Plastic enclosure

### Performance Specifications:

- Host Data Rate: Up to 1Mbps
- Serial Data Format (AT+i mode):
  - Asynchronous character; binary; 8 data bits; no parity; 1 stop bit.
- Serial Data Format (SerialNET mode):
  - Asynchronous character; binary; 7 or 8 data bits; odd, even or no parity; 1 stop bit.
- Flow Control: hardware (DTR, RTS, CTS, DSR) and software flow control

### Warranty:

One-year limited warranty

### Approvals:

CE; FCC pending

### Configuration:

Secure iLAN firmware and device configuration parameters can be remotely updated over the Internet. Secure iLAN can be easily configured via Connect One's iChipConfig utility. This Windows-based utility enables quick configuration of the iChip CO2128 via a local serial connection or via the Web. The iChipConfig utility also enables packaging of the application's website.

### Pin Assignments:


Pin #	RS232 Connector	RS485 Connector
1	CDH Output	Not Connected
2	TXD Output	TXD+ Output
3	RXD Input	RXD+ Input
4	Short to pin 6	Short to pin 6
5	Ground	Ground
6	Short to pin 4	Short to pin 4
7	CTS Input	RXD- Input
8	RTS Output	TXD- Output
9	V <sub>in</sub> =6-24V	V <sub>in</sub> =6-24V

### Serial Connector, Power Jack, Mode Select, SerialNET and Power LEDs



### RJ-45 Connector Link and Activity LEDs

### Typical Application:

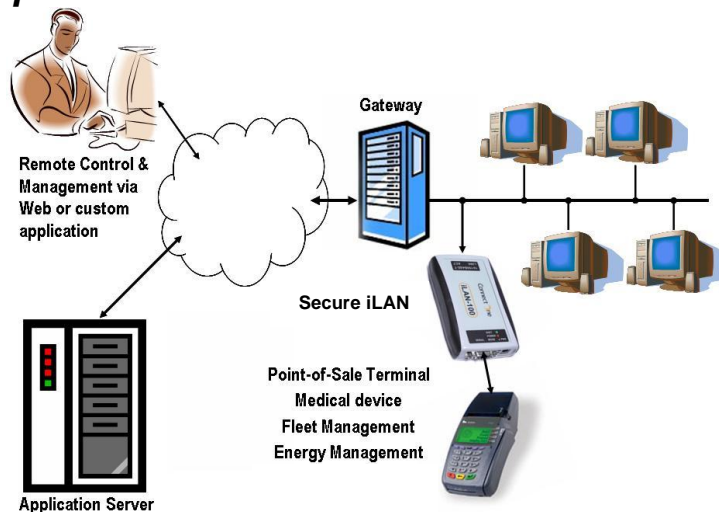

### Ordering Information:

iL2128-232-009: Secure iLAN without power supply, RS232 connector  
iL2128-232-110: Secure iLAN with 110V power supply, RS232 connector  
iL2128-232-220: Secure iLAN with 220V power supply, RS232 connector  
iL2128-485-009: Secure iLAN without power supply, RS485 connector  
iL2128-485-110: Secure iLAN with 110V power supply, RS485 connector  
iL2128-485-220: Secure iLAN with 220V power supply, RS485 connector

iChip, Secure Internet Controller, AT+i, Secure iLAN, SerialNET and Connect One are trademarks of Connect One Ltd. Specifications are subject to change without notice. Copyright © Connect One Ltd., February 2008. All rights reserved.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)