



	REV.	CHANGE	DATE	APPD.
--	------	--------	------	-------

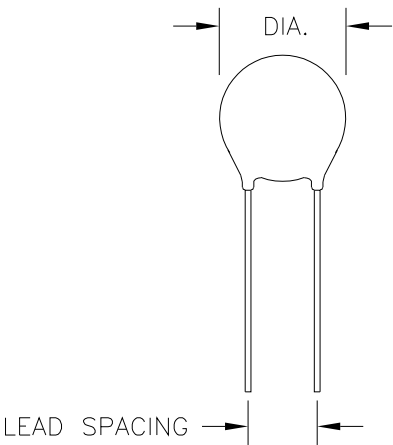

DIA.

LEAD SPACING

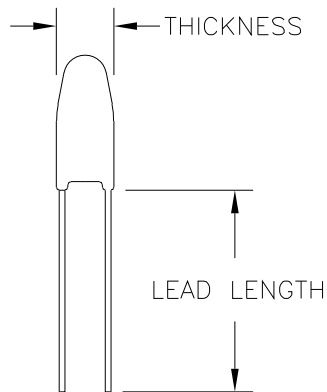

THICKNESS

LEAD LENGTH

PARAMETER	SYMBOL	SPEC
RESISTANCE AT 25°C	R_0	16.0 OHMS $\pm 20\%$
MAX STEADY STATE CURRENT	I_{MAX}	4 AMPS
RESISTANCE AT I_{MAX}	R_{IMAX}	.27 OHMS
DIAMETER		.591 MAX
THICKNESS		.245 MAX
LEAD DIAMETER		.032 NOM
LEAD LENGTH		1.500 MIN
LEAD SPACING		.310 NOM
COATING MATERIAL		SILICONE RESIN

TOLERANCES UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES, AND TOLERANCES ARE AS SHOWN HERE. FRACTIONS = $\pm 1/64$ DECIMALS .XX = .01 .XXX = .005 ANGLES = 0°30'	DRAWN	DATE	FENWAL ELECTRONICS, INC. 450 FORTUNE BOULEVARD, MILFORD, MASSACHUSETTS 01757 U.S.A. TELEPHONE (508) 478 - 6000 FAX (508) 473 - 6035
	HS	7DEC94	
	CHECKED	DATE	
	BM	12/8/94	TITLE ICL THERMISTOR OUTLINE
	APPROVED	DATE	
	DL	12/8/94	

USED ON SR 18705	This information is the property of FENWAL ELECTRONICS, INC. It is submitted in confidence, and is not to be disclosed or utilized without written permission.
--	---

SHEET	OF	DO NOT SCALE DRAWING	SCALE	SIZE	DRAWING NUMBER	REV.
1	1		— —	A	ICL1516004-01	OI

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com