


WHEN PLUGBOARD HAS NO MATRIX ON REVERSE SIDE, COMPONENT LAYOUT CAN BE DRAWN ON REVERSE SIDE OF EXTRA LAYOUT PAPER PROVIDED WITH PLUGBOARD.

FOR 3797-2 AND -3 DIP PLUGBORDS™

NOTICE: Where tin-coated circuitry exists, a small percentage of the holes may have solder blockage. This is **USUALLY** a light "skin" easily penetrated by component leads. In some cases, a soldering iron may be required.

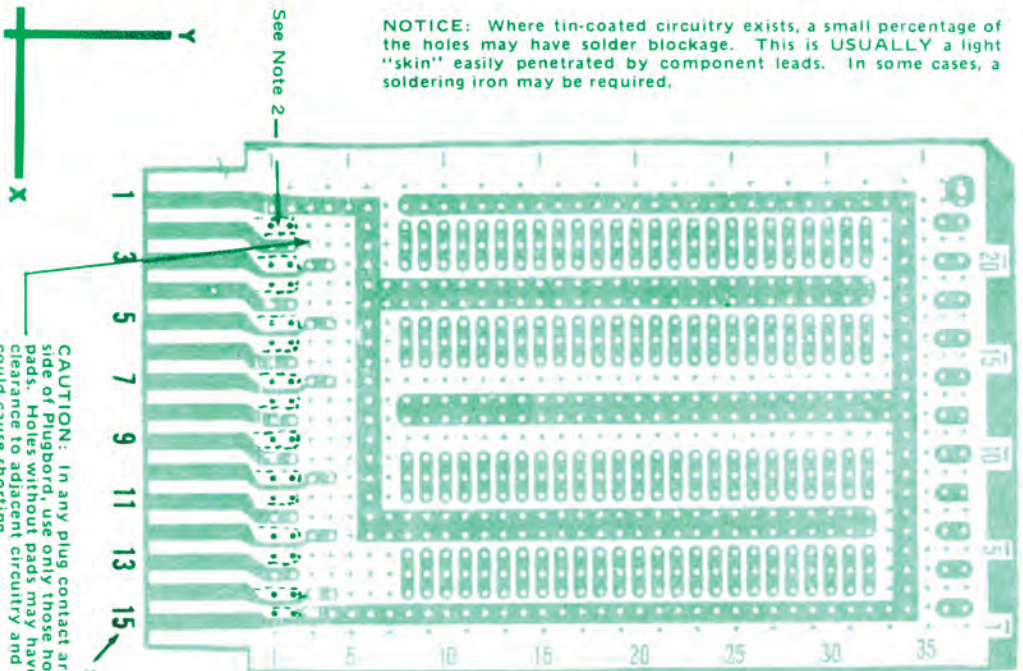

NOTICE: Before pressing terminals into board, position (rotate) terminals to maximize the clearance between the widest part of the terminal and the nearest adjacent conductor.


CAUTION: In any plug contact area on either side of Plugboard, use only those holes having clearance to adjacent circuitry and using them could cause shorting.

3. INTENDED FOR USE IN NON-HOSTILE ENVIRONMENTS UP TO 200 VOLTS RMS OR 300 VOLTS DC.
2. OPEN OVALS REPRESENT CONTACTS ON OPPOSITE SIDE OF BOARD
1. NUMBERING CORRESPONDS TO VECTOR R630 RECEPTACLE

VECTOR
ELECTRONIC COMPANY

VECTOR DIP PLUGBORD™
"P" PATTERN 0.042" DIA. x 0.10" SPACED HOLES
LA5P2 LAYOUT PAPER



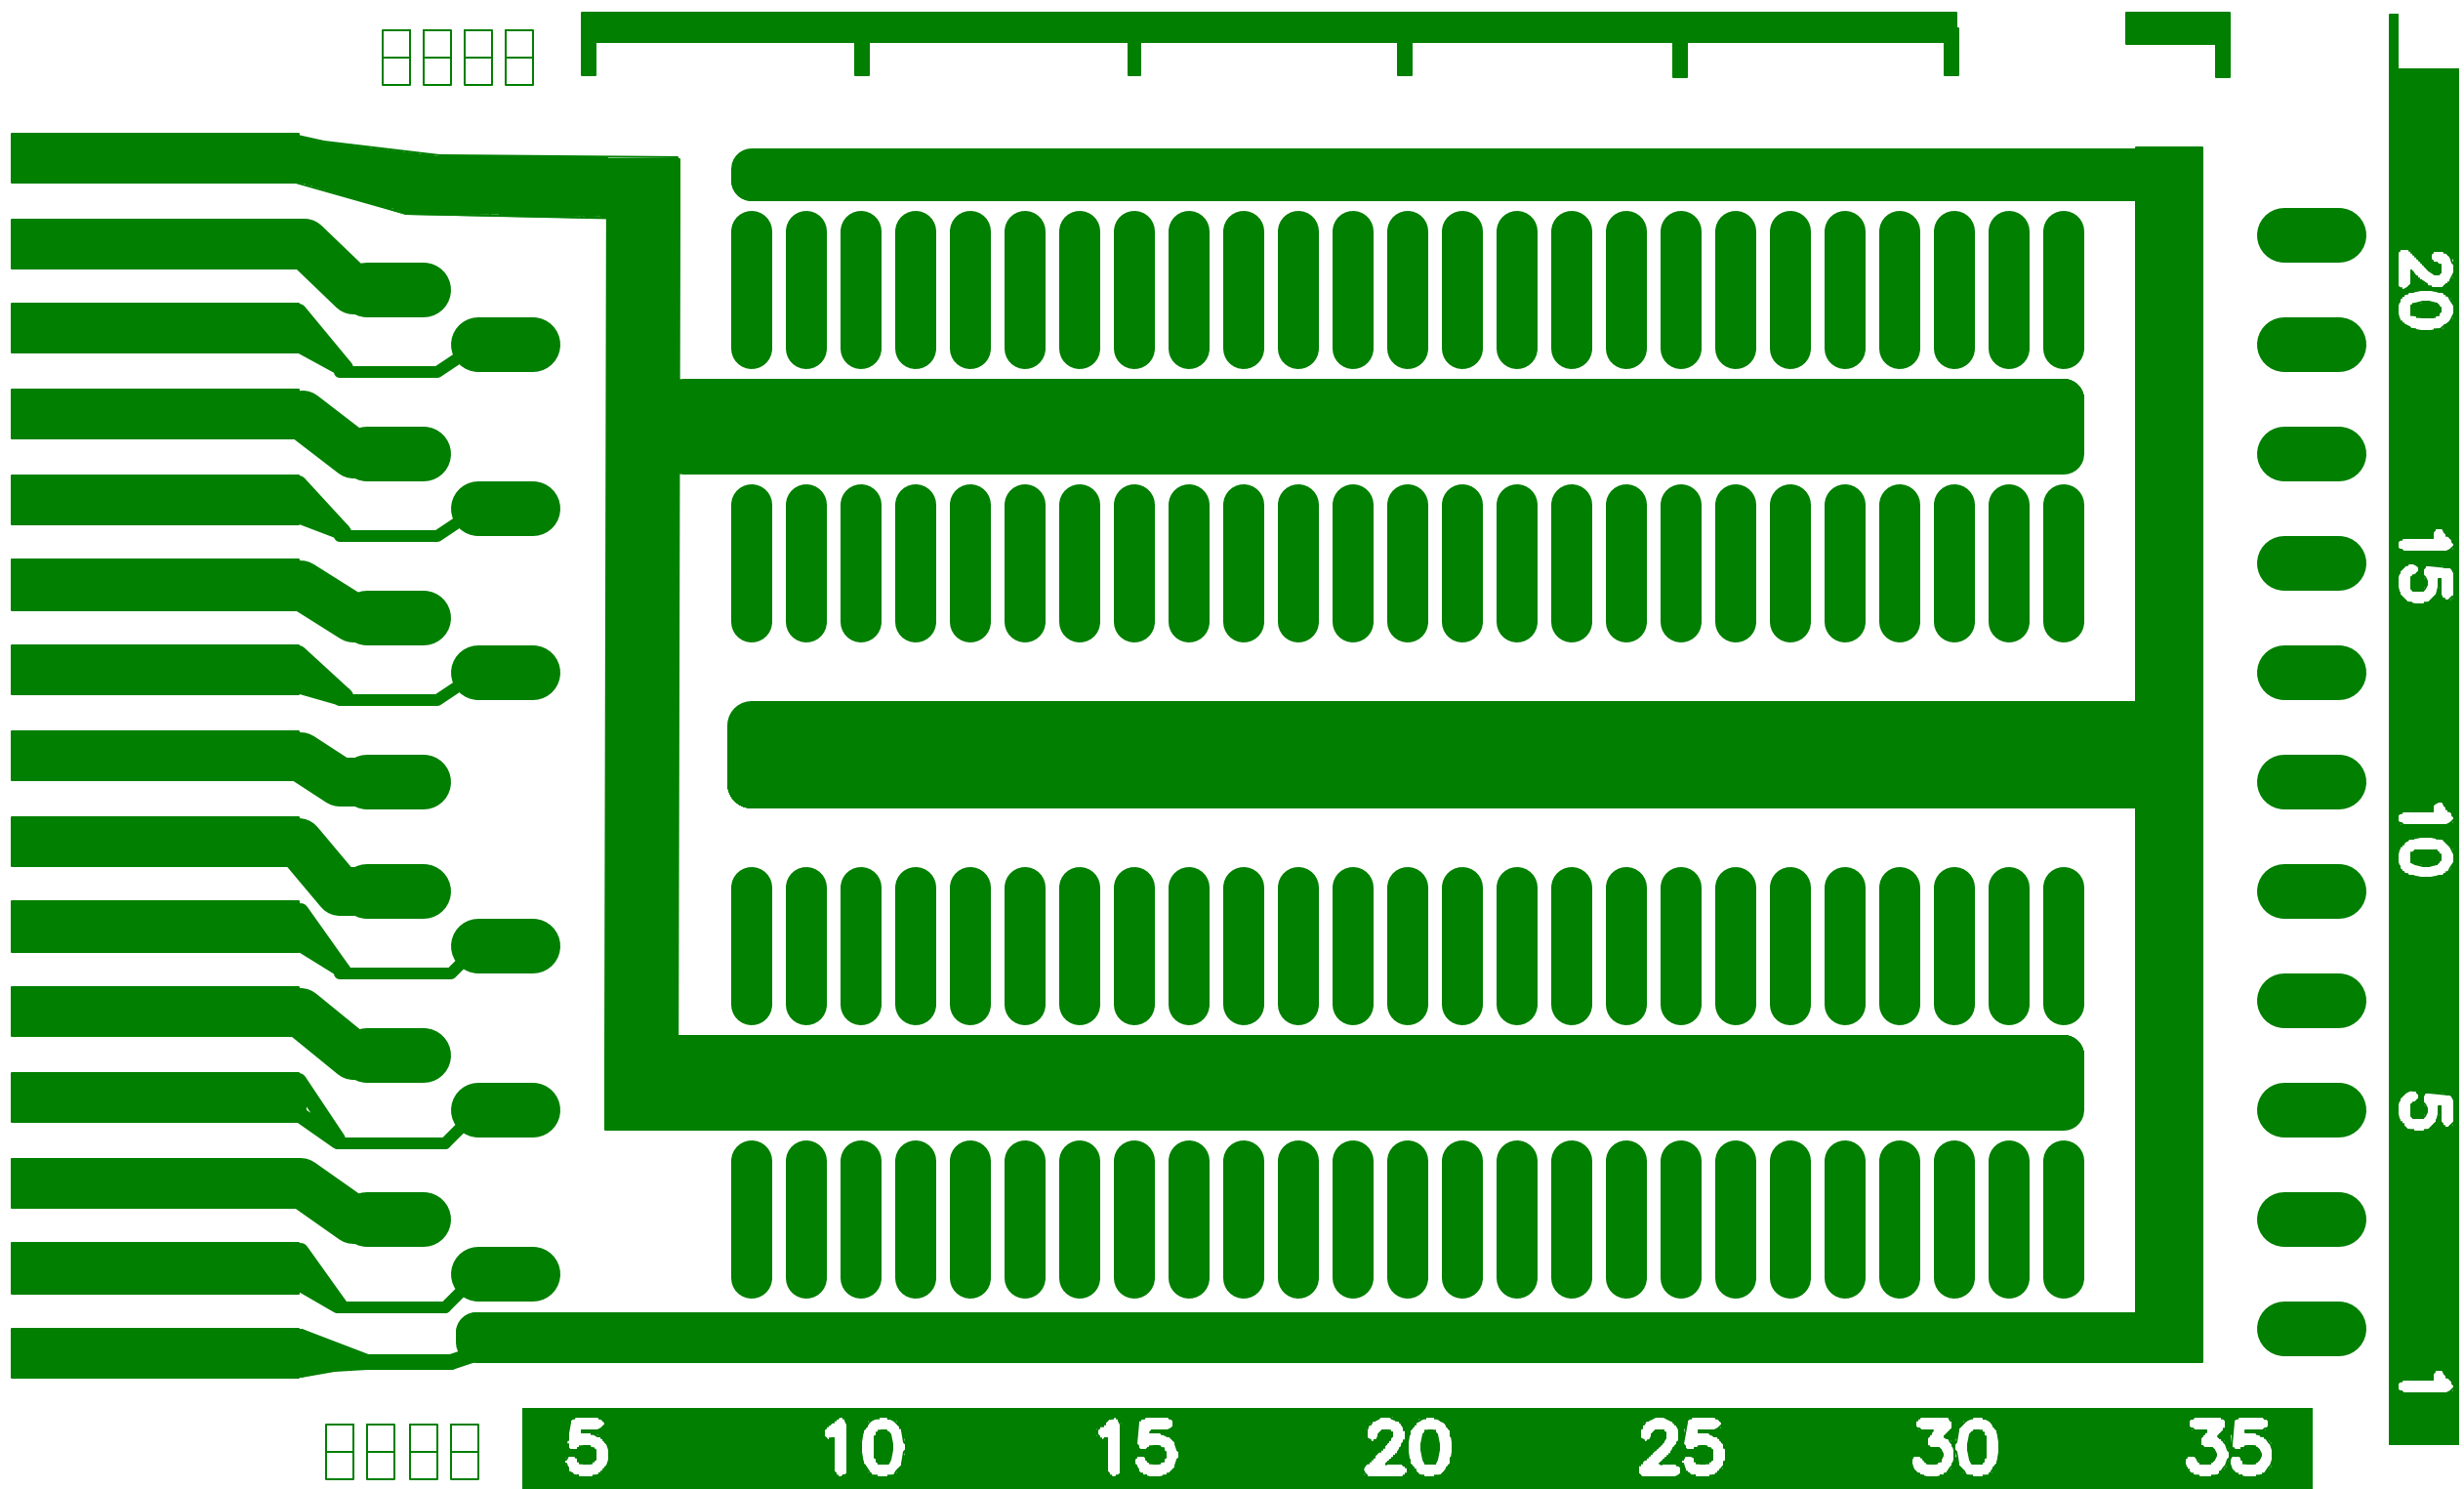

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com