



PTC thermistors for overcurrent protection

SMDs, EIA sizes 3225 and 4032, 24 V

Series/Type: B59101, B59201, B59301

Date: February 2012

Overcurrent protection

SMDs, EIA sizes 3225 and 4032, 24 V

SMD

Applications

- Overcurrent protection
- Short circuit protection


Features

- Molded epoxy encapsulation, lead-free tinned solder terminals
- Suitable for wave and reflow soldering
- Suitable for automatic placement
- Qualification based on AEC-Q200, Rev. D
- RoHS-compatible

Delivery mode

- Blister tape, 330-mm reel with 16-mm tape, taping to IEC 60286-3

Dimensional drawing




Dimensions (mm)


Type	h ±0.5	w ±0.5	l ±0.5	a ±0.3	Size
Reference temperature $T_{ref} = 80\text{ °C}$					
P1101	3.3	6.3	8.0	1.7	3225
P1201	3.3	6.3	8.0	1.7	3225
P1301	3.3	8.0	10.0	2.3	4032
Reference temperature $T_{ref} = 120\text{ °C}$					
P1101	3.3	6.3	8.0	1.7	3225
P1201	3.3	6.3	8.0	1.7	3225
P1301	3.3	8.0	10.0	2.3	4032

Geometry of solder pads

EIA case size 3225

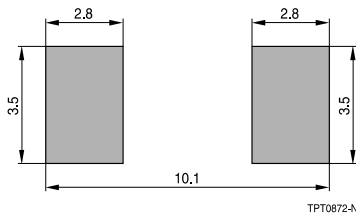

EIA case size 4032

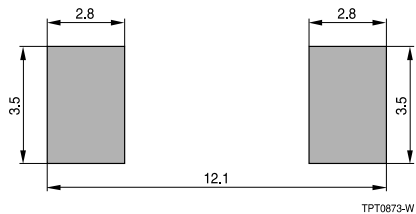

Recommended maximum dimensions (mm)

General technical data

Max. operating voltage	$(T_A = 60\text{ °C})$	V_{max}	30	V DC or V AC
Rated voltage		V_R	24	V DC or V AC
Switching cycles		N	100	
Tolerance of R_R		ΔR_R	±25	%
Operating temperature range	$(V = 0)$	T_{op}	−40/+125	°C
Operating temperature range	$(V = V_{max})$	T_{op}	−40/+60	°C

Overcurrent protection

SMDs, EIA sizes 3225 and 4032, 24 V

SMD

Electrical specifications and ordering codes

Type	I_R mA	I_S mA	I_{Smax} ($V = V_{max}$) A	I_r (typ.) ($V = V_{max}$) mA	R_R Ω	R_{min} Ω	Ordering code
Reference temperature $T_{ref} = 80\text{ °C}$							
P1301	205	420	1.6	38	3.1	1.85	B59301P1080A062
P1201	165	340	1.0	34	4.6	2.70	B59201P1080A062
P1101	90	185	0.7	25	13	7.80	B59101P1080A062
Reference temperature $T_{ref} = 120\text{ °C}$							
P1301	310	640	1.6	53	3.1	1.85	B59301P1120A062
P1201	265	545	1.0	45	4.6	2.70	B59201P1120A062
P1101	170	355	0.7	35	13	7.80	B59101P1120A062

Reliability data

Test	Standard	Test conditions	$ \Delta R_{25}/R_{25} $
Electrical endurance, cycling	IEC 60738-1	Room temperature, I_{Smax} , V_{max} Number of cycles: 100	< 25%
Electrical endurance, constant	IEC 60738-1	Storage at $V_{max}/T_{op,max}$ (V_{max}) Test duration: 1000 h	< 25%
Damp heat	IEC 60738-1	Temperature of air: 40 °C Relative humidity of air: 93% Duration: 56 days Test according to IEC 60068-2-78	< 10%
Rapid change of temperature	IEC 60738-1	$T_1 = T_{op,min}$ (0 V), $T_2 = T_{op,max}$ (0 V) Number of cycles: 5 Test duration: 30 min Test according to IEC 60068-2-14, test Na	< 10%
Shock	IEC 60738-1	Acceleration: 390 m/s ² Pulse duration: 6 ms; 6 × 4000 pulses	< 5%
Bending test	IEC 60738-1	Components reflow-soldered to test board Maximum bending: 2 mm Test according to IEC 60068-2-21, test Ue	< 10%

Overcurrent protection

SMDs, EIA sizes 3225 and 4032, 24 V


SMD

Characteristics (typical) for $T_{ref} = 80\text{ }^{\circ}\text{C}$

PTC resistance R_{PTC} versus


PTC temperature T_{PTC}

(measured at low signal voltage)

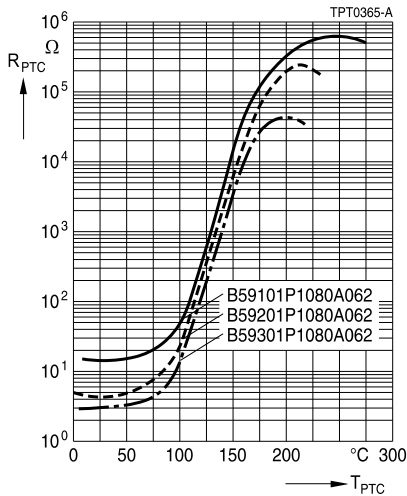


PTC current I_{PTC} versus PTC voltage V_{PTC}

(measured at 25 °C in still air)

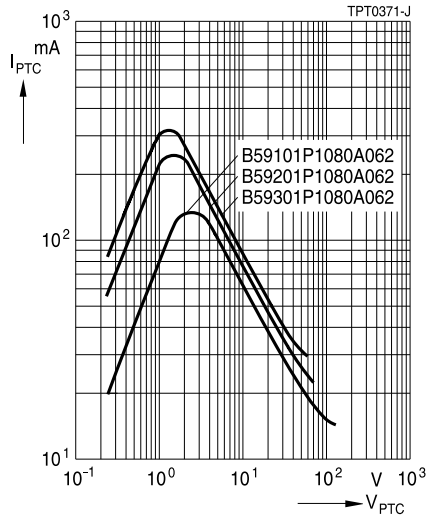


Switching time t_s versus switching current I_s

(measured at 25 °C in still air)

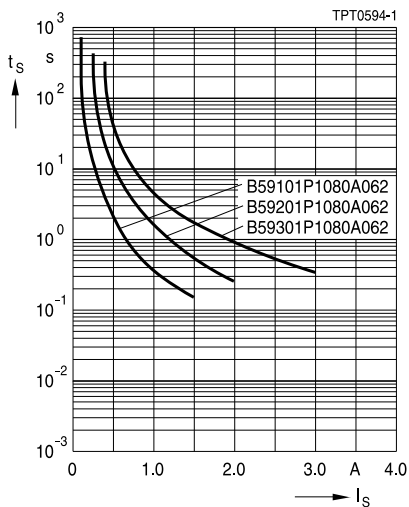

Rated current I_R versus ambient temperature T_A

(measured in still air)

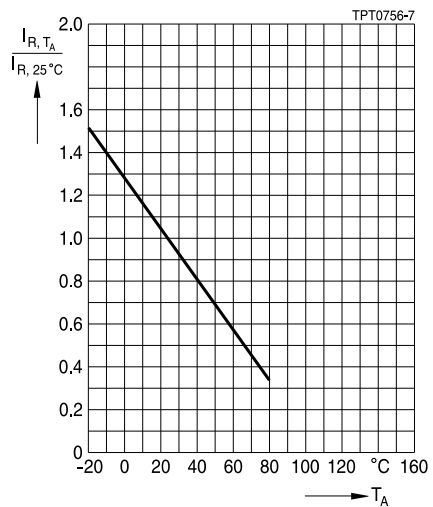

Overcurrent protection

SMDs, EIA sizes 3225 and 4032, 24 V


SMD

Characteristics (typical) for $T_{ref} = 120\text{ }^{\circ}\text{C}$

PTC resistance R_{PTC} versus


PTC temperature T_{PTC}

(measured at low signal voltage)

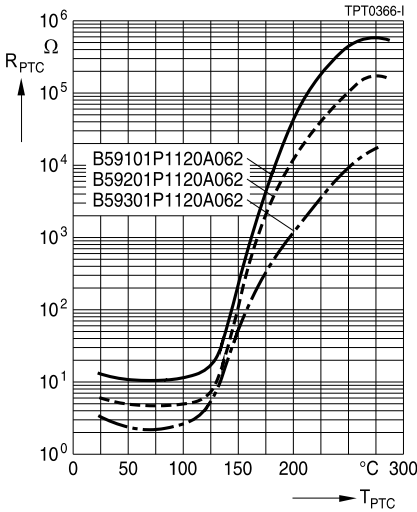


PTC current I_{PTC} versus PTC voltage V_{PTC}

(measured at 25 $^{\circ}\text{C}$ in still air)

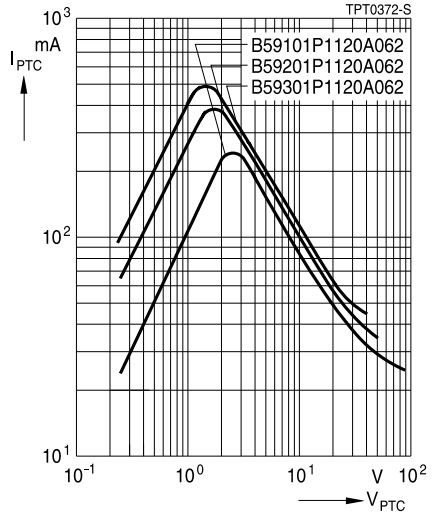


Switching time t_s versus switching current I_s

(measured at 25 $^{\circ}\text{C}$ in still air)

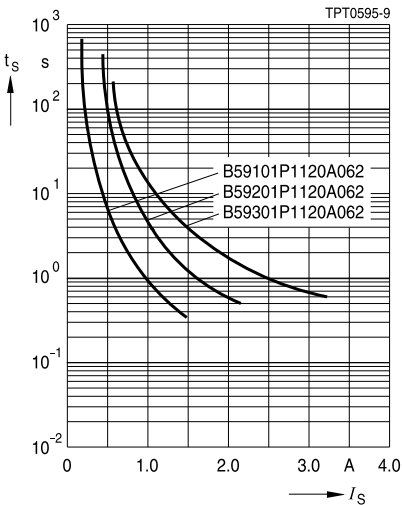

Rated current I_R versus ambient temperature T_A

(measured in still air)

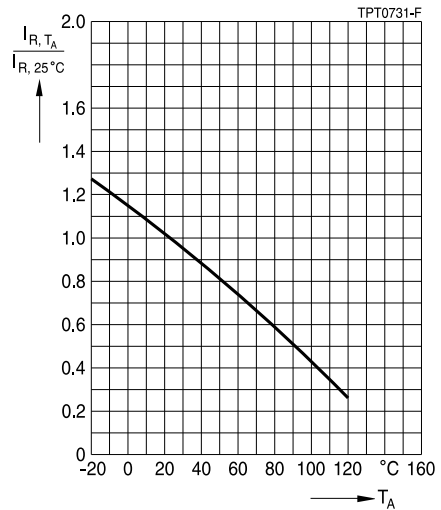

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trade-marks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com