


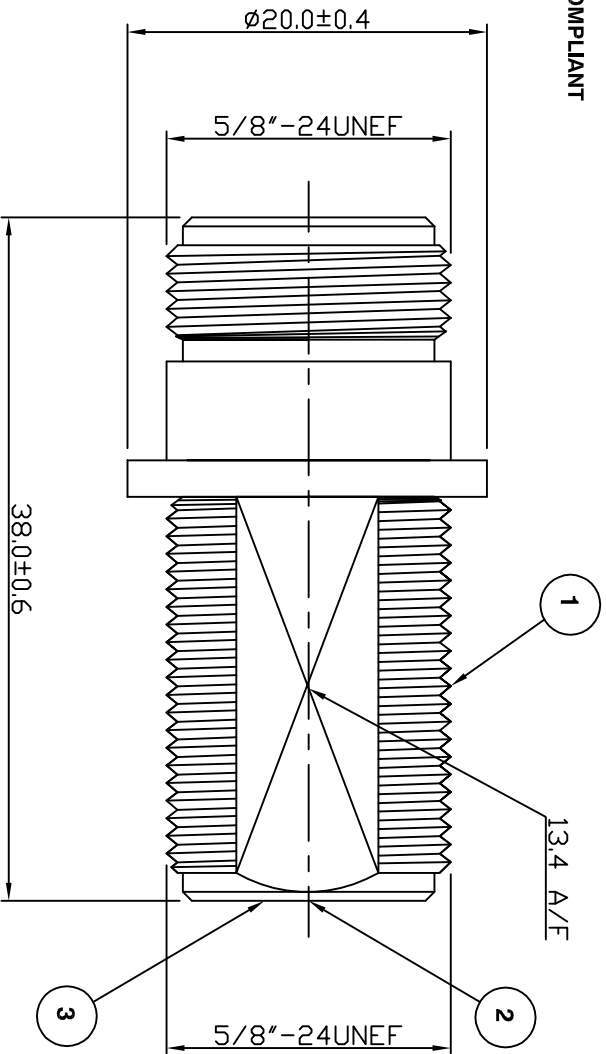

Electrical Characteristics

Nominal Impedance: 50 ohms
Frequency Range: DC to 11 GHz
Operating Voltage (rms): 1500 V maximum at sea level
Dielectric Withstand Voltage (rms): 2500 V maximum at sea level
Contact Resistance: 1.0 milliohms maximum
Insulation Resistance: 5000 megohms minimum

Mechanical Characteristics

Mating Cycles: 500 cycles minimum
Interface Dimensions: Conform to MIL-C-39012


Environmental Characteristics

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body
2	Contact
3	Dielectric
4	Washer
5	Nut

Panel Cut-out: PCD-11

Address & RoHS Update	JT	5	25 Mar 10
Dimensions added	SN	4	09 Mar 04
CAD Issue	SN	3	18 Mar 03
Dimensional change	AT	2	15 Oct 99
First Issue	AT	1	16 Feb 96
DESCRIPTION OF REVISION	APPVD	ISS	DATE



EMERSON
Network Power

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

P Couzens

DATE:

09 Mar 04

TITLE:

**N Bulkhead Jack to Jack
Adaptor (Double Flats)**

PART NUMBER:

VNA100-1

PAGE: 1 of 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com