



TOP VIEW

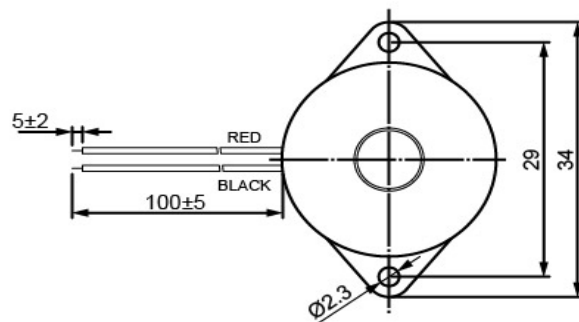

SIDE VIEW



Specifications

Description	Value	Unit
Technology	Piezo	
Resonant Frequency	5,500	(Hz)
Rated Voltage	15	(V)
SPL @ 10cm	90	(dBA)
Capacitance	18,000	(pF)
Mount Type	Flange	
Voltage Range	1 ~ 30	(V)
Max Rated Current	8	(mA)
Housing Material	NORYL	
Operating Temperature	-30 ~ +70	°C
Storage Temperature	-40 ~ +85	°C
Weight	1.9	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Piezo Transducer

Revision History

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

TP245515-2

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com