

Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved 

90 A
110 A

Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	90MT.KB	110MT.KB	Units
I_O	90 (120)	110 (150)	A
@ T_C	90 (61)	90 (57)	°C
I_{FSM} @ 50Hz	770	950	A
@ 60Hz	810	1000	A
I^2t @ 50Hz	3000	4500	A ² s
@ 60Hz	2700	4100	A ² s
$I^2\sqrt{t}$	30000	45000	A ² √s
V_{RRM} range	800 to 1600		V
T_{STG} range	- 40 to 150		°C
T_J range	- 40 to 150		°C

90-110MT..KB Series

Bulletin I27501 rev. A 05/03

International
IRF Rectifier**ELECTRICAL SPECIFICATIONS****Voltage Ratings**

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max. mA
90-110MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameter	90MT.KB	110MT.KB	Units	Conditions
I_O Maximum DC output current @ Case temperature	90 (120)	110 (150)	A	120° Rect conduction angle
	90 (61)	90 (57)	°C	
I_{FSM} Maximum peak, one-cycle forward, non-repetitive surge current	770	950	A	t = 10ms No voltage
	810	1000		t = 8.3ms reapplied
	650	800		t = 10ms 100% V_{RRM}
	680	840		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	3000	4500	A ² s	t = 10ms No voltage
	2700	4100		t = 8.3ms reapplied
	2100	3200		t = 10ms 100% V_{RRM}
	1900	2900		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	30000	45000	A ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.89	0.81	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_J max.
$V_{F(TO)2}$ High level value of threshold voltage	1.05	0.99		$(I > \pi \times I_{F(AV)})$, @ T_J max.
r_{f1} Low level value of forward slope resistance	5.11	4.37	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_J max.
r_{f2} High level value of forward slope resistance	4.64	4.64		$(I > \pi \times I_{F(AV)})$, @ T_J max.
V_{FM} Maximum forward voltage drop	1.6	1.4	V	$I_{pk} = 150A$, $T_J = 25^\circ C$, $t_p = 400\mu s$ single junction
V_{INS} RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$, all terminal shorted f = 50Hz, t = 1s

Thermal and Mechanical Specifications

Parameter		90MT.KB	110MT.KB	Units	Conditions
T _j	Max. junction operating temperature range	-40 to 150		°C	
T _{stg}	Max. storage temperature range	-40 to 150		°C	
R _{thJC}	Max. thermal resistance, junction to case	0.21	0.18	K/W	DC operation per module
		1.26	1.07		DC operation per junction
		0.25	0.21		120° Rect conduction angle per module
		1.47	1.25		120° Rect conduction angle per junction
R _{thCS}	Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T	Mounting torque ± 10% to heatsink to terminal	4 to 6		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
		3 to 4			
wt	Approximate weight	176		g	


Ordering Information Table

Device Code

11	0	MT	160	K	B
①	②	③	④	⑤	

- 1** - Current rating code: 9 = 90 A (Avg)
11 = 110 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings Table)
- 5** - Generation II

Outline Table (without optional barriers)

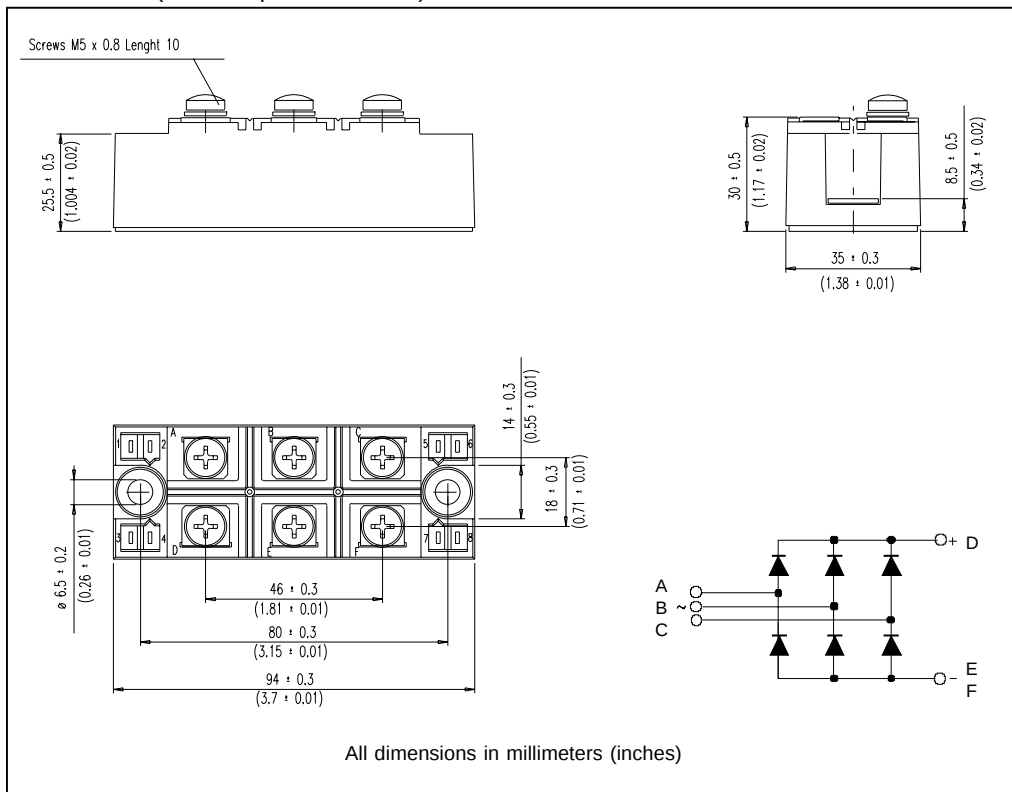

NOTE: To order the Optional Hardware see Bulletin I27900

90-110MT..KB Series

Bulletin I27501 rev. A 05/03

Outline Table (with optional barriers)

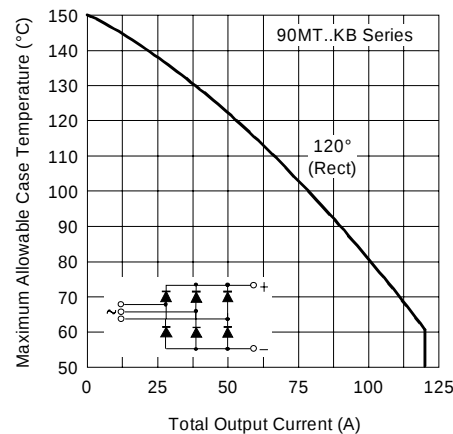
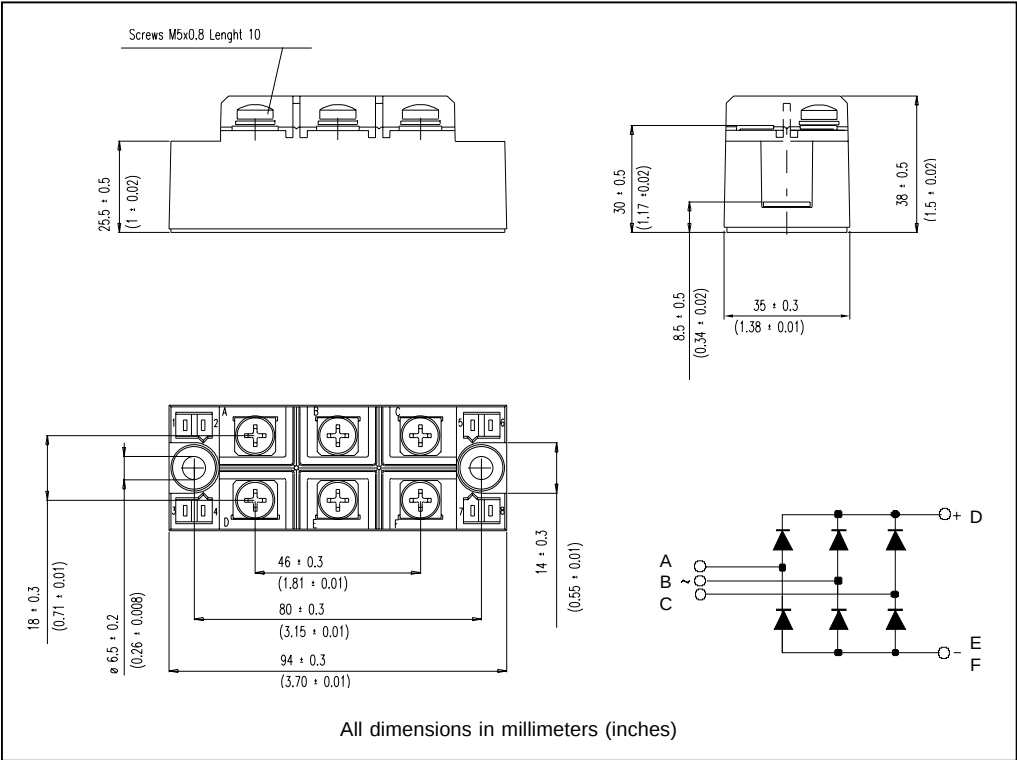


Fig. 1 - Current Ratings Characteristics

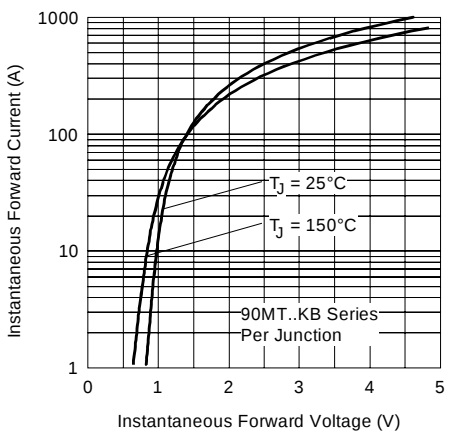


Fig. 2 - Forward Voltage Drop Characteristics

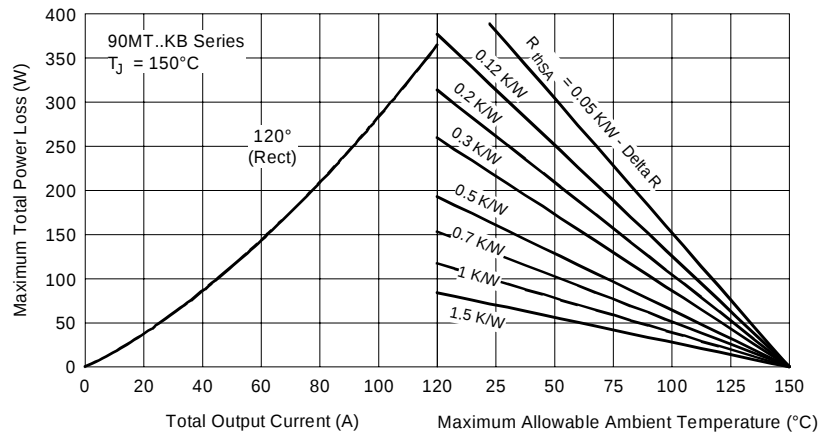


Fig. 3 - Total Power Loss Characteristics

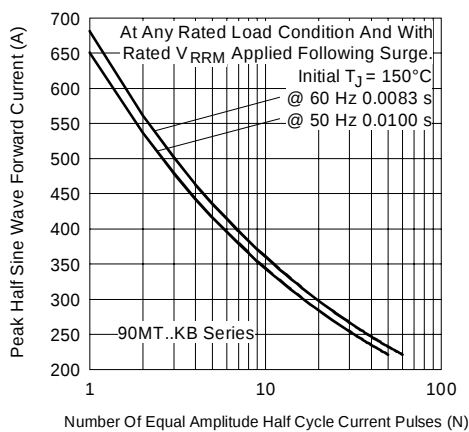


Fig. 4 - Maximum Non-Repetitive Surge Current

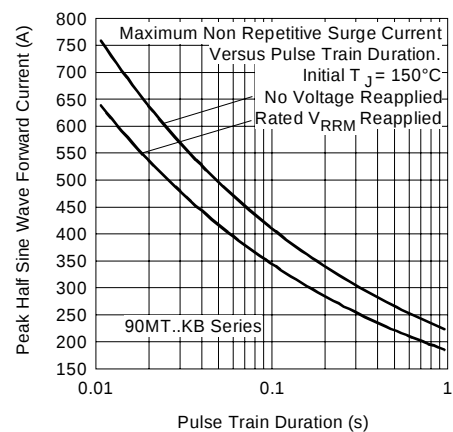


Fig. 5 - Maximum Non-Repetitive Surge Current

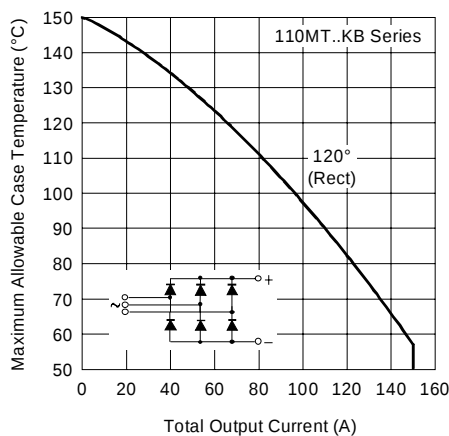


Fig. 6 - Current Ratings Characteristics

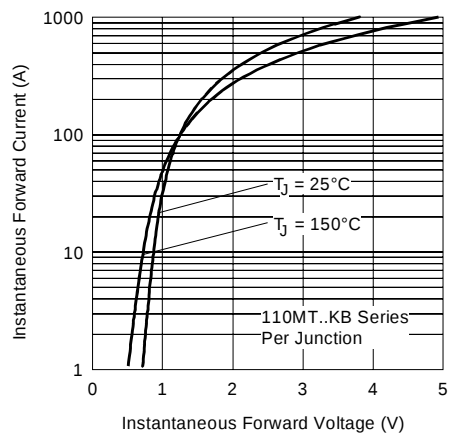


Fig. 7 - Forward Voltage Drop Characteristics

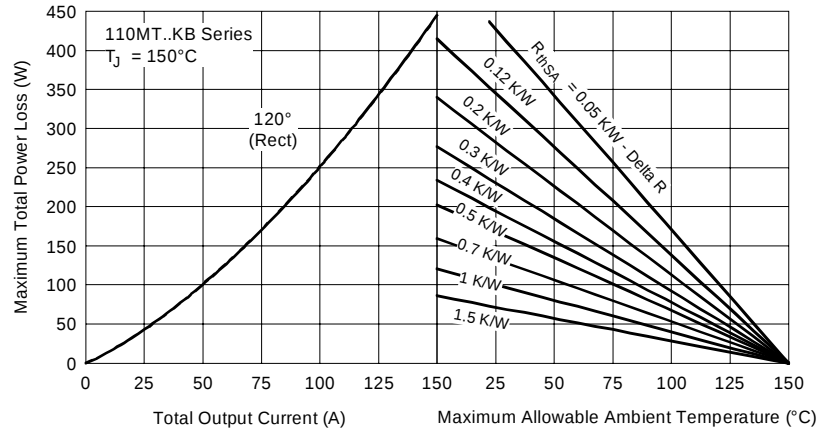


Fig. 8 - Total Power Loss Characteristics

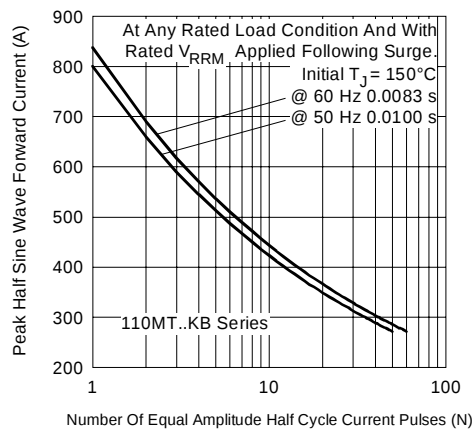


Fig. 9 - Maximum Non-Repetitive Surge Current

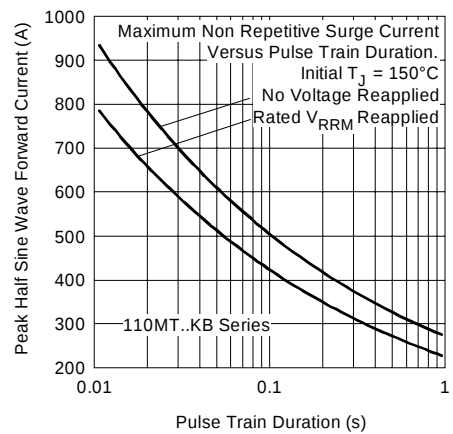


Fig. 10 - Maximum Non-Repetitive Surge Current

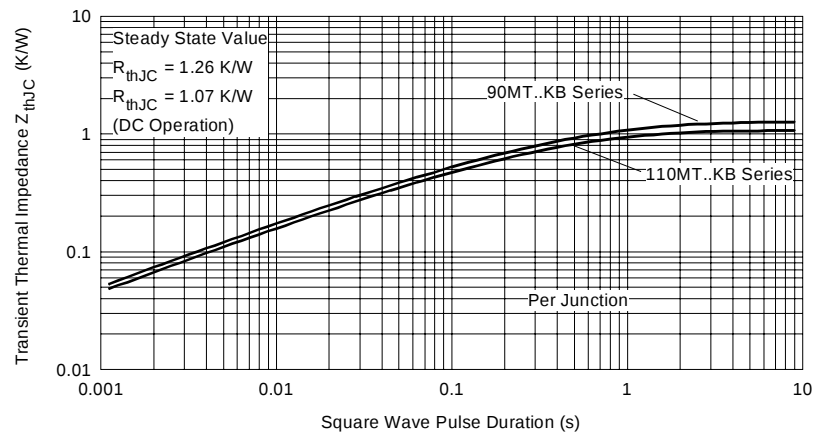


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 05/03

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com